


Revised 11/8/20

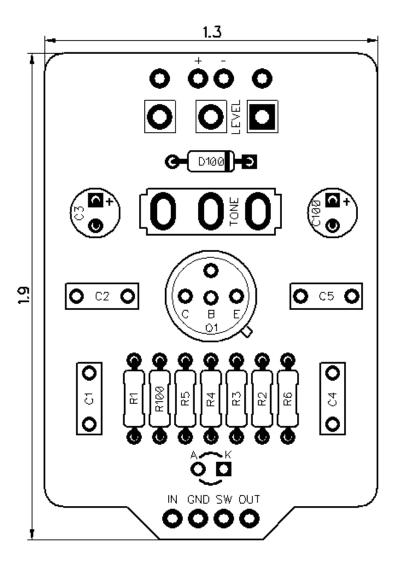

#### **CONTROLS AND FEATURES**

- Level
- Tone (toggle switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.





### Aft Preamp Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	10K	Resistor, 1/4W	
R3	68K	Resistor, 1/4W	
R4	470K	Resistor, 1/4W	
R5	100R	Resistor, 1/4W	
R6	1M	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
11100	TIXI	110313101, 17477	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	4n7	Film capacitor, 7.2 x 2.5mm	
C1 C2 C3 C4 C5	47u	Floatrolytic capacitor 5mm	
C3		Electrolytic capacitor, 5mm	
04	100n	Film capacitor, 7.2 x 2.5mm	
C5	100n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
D 100	1110017	Conductivy diode, BO-41	
Q1	OC139	Germanium transistor, NPN	
Q I	00100		
LEVEL	B10K	16mm right-angle PCB mount pot	
	Dioix	Tomini rigint-arigic i OD modrit pot	
TONE		Toggle switch, SPDT	2-position (ON/ON)
TONL		loggie switch, or D1	z-position (ON/ON)
			1
	•	- <b>.</b>	•

# Aft Preamp Schematic Diagram




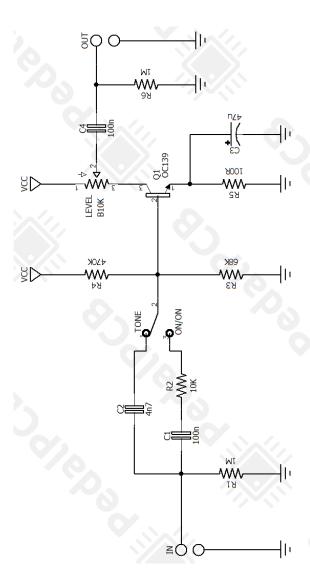





### Aft Preamp Wiring Diagram

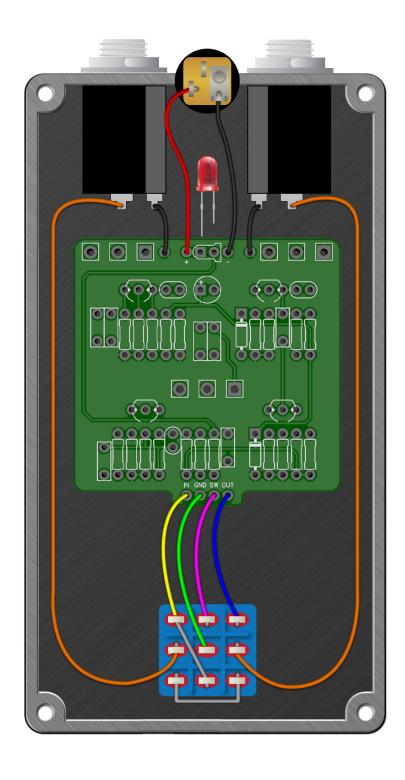



## Aft Preamp Drill Template 125B enclosure

