


PedalPCB

Bolide Distortion

Revised 7/16/21

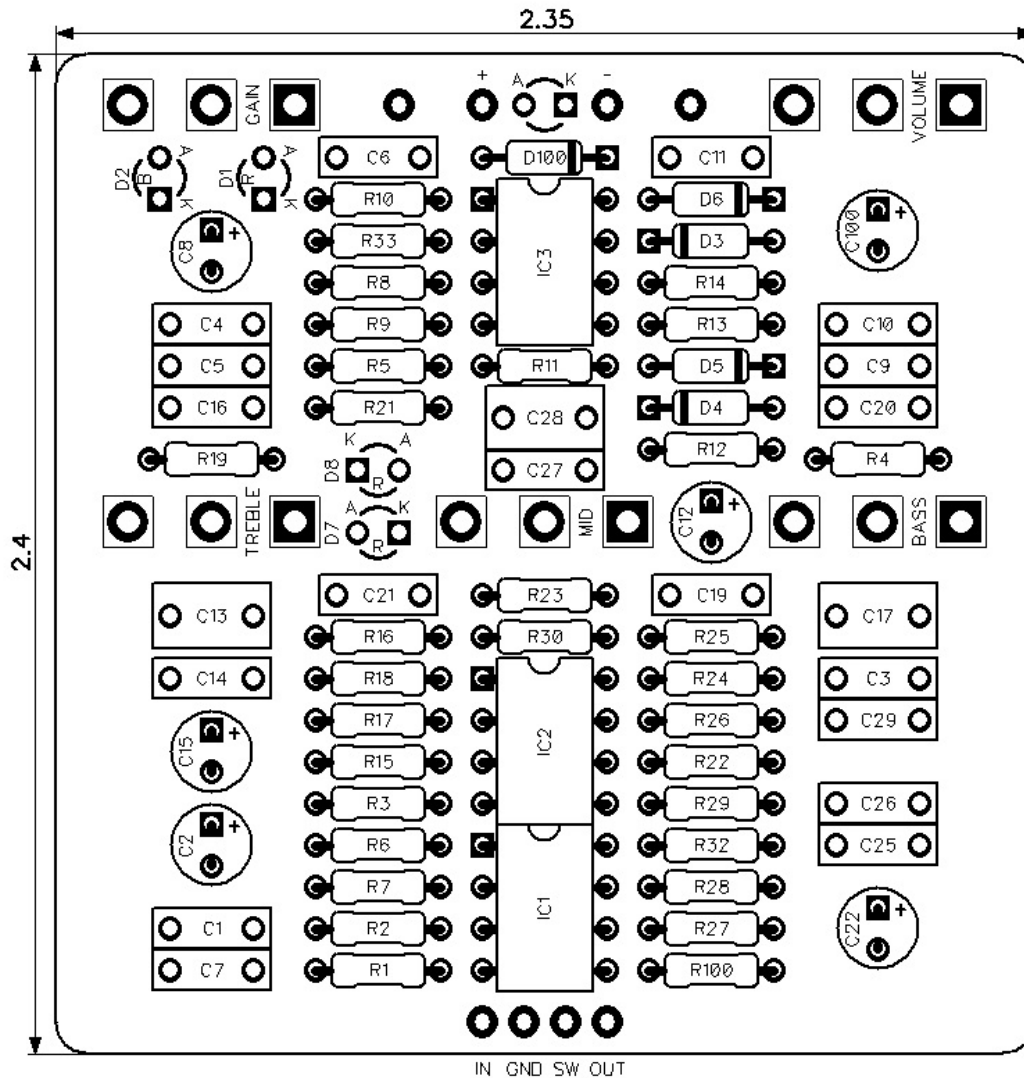


CONTROLS AND FEATURES

- Volume
- Gain
- Bass
- Mid
- Treble

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.


LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	4K7	Resistor, 1/4W	
R3	470K	Resistor, 1/4W	
R4	47K	Resistor, 1/4W	
R5	47K	Resistor, 1/4W	
R6	56K	Resistor, 1/4W	
R7	47K	Resistor, 1/4W	
R8	10K	Resistor, 1/4W	
R9	82K	Resistor, 1/4W	
R10	4K7	Resistor, 1/4W	
R11	100K	Resistor, 1/4W	
R12	22K	Resistor, 1/4W	
R13	22K	Resistor, 1/4W	
R14	47K	Resistor, 1/4W	
R15	100K	Resistor, 1/4W	
R16	10K	Resistor, 1/4W	
R17	10K	Resistor, 1/4W	
R18	10K	Resistor, 1/4W	
R19	3K3	Resistor, 1/4W	
R21	3K3	Resistor, 1/4W	
R22	100K	Resistor, 1/4W	
R23	2K2	Resistor, 1/4W	
R24	2K2	Resistor, 1/4W	
R25	15K	Resistor, 1/4W	
R26	100K	Resistor, 1/4W	
R27	10K	Resistor, 1/4W	
R28	15K	Resistor, 1/4W	
R29	7K5	Resistor, 1/4W	
R30	7K5	Resistor, 1/4W	
R32	22K	Resistor, 1/4W	
R33	4K7	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	47u	Electrolytic capacitor, 5mm	
C3	100n	Film capacitor, 7.2 x 2.5mm	
C4	6n8	Film capacitor, 7.2 x 2.5mm	
C5	1n	Film capacitor, 7.2 x 2.5mm	
C6	100p	Ceramic capacitor	
C7	1n	Film capacitor, 7.2 x 2.5mm	
C8	1u	Electrolytic capacitor, 5mm	
C9	100p	Ceramic capacitor	
C10	100n	Film capacitor, 7.2 x 2.5mm	
C11	100n	Film capacitor, 7.2 x 2.5mm	
C12	1u	Electrolytic capacitor, 5mm	
C13	220n	Film capacitor, 7.2 x 5.0mm	
C14	100p	Ceramic capacitor	
C15	1u	Electrolytic capacitor, 5mm	




Bolide Distortion

Parts List (Page 2 of 2)

[illegible]

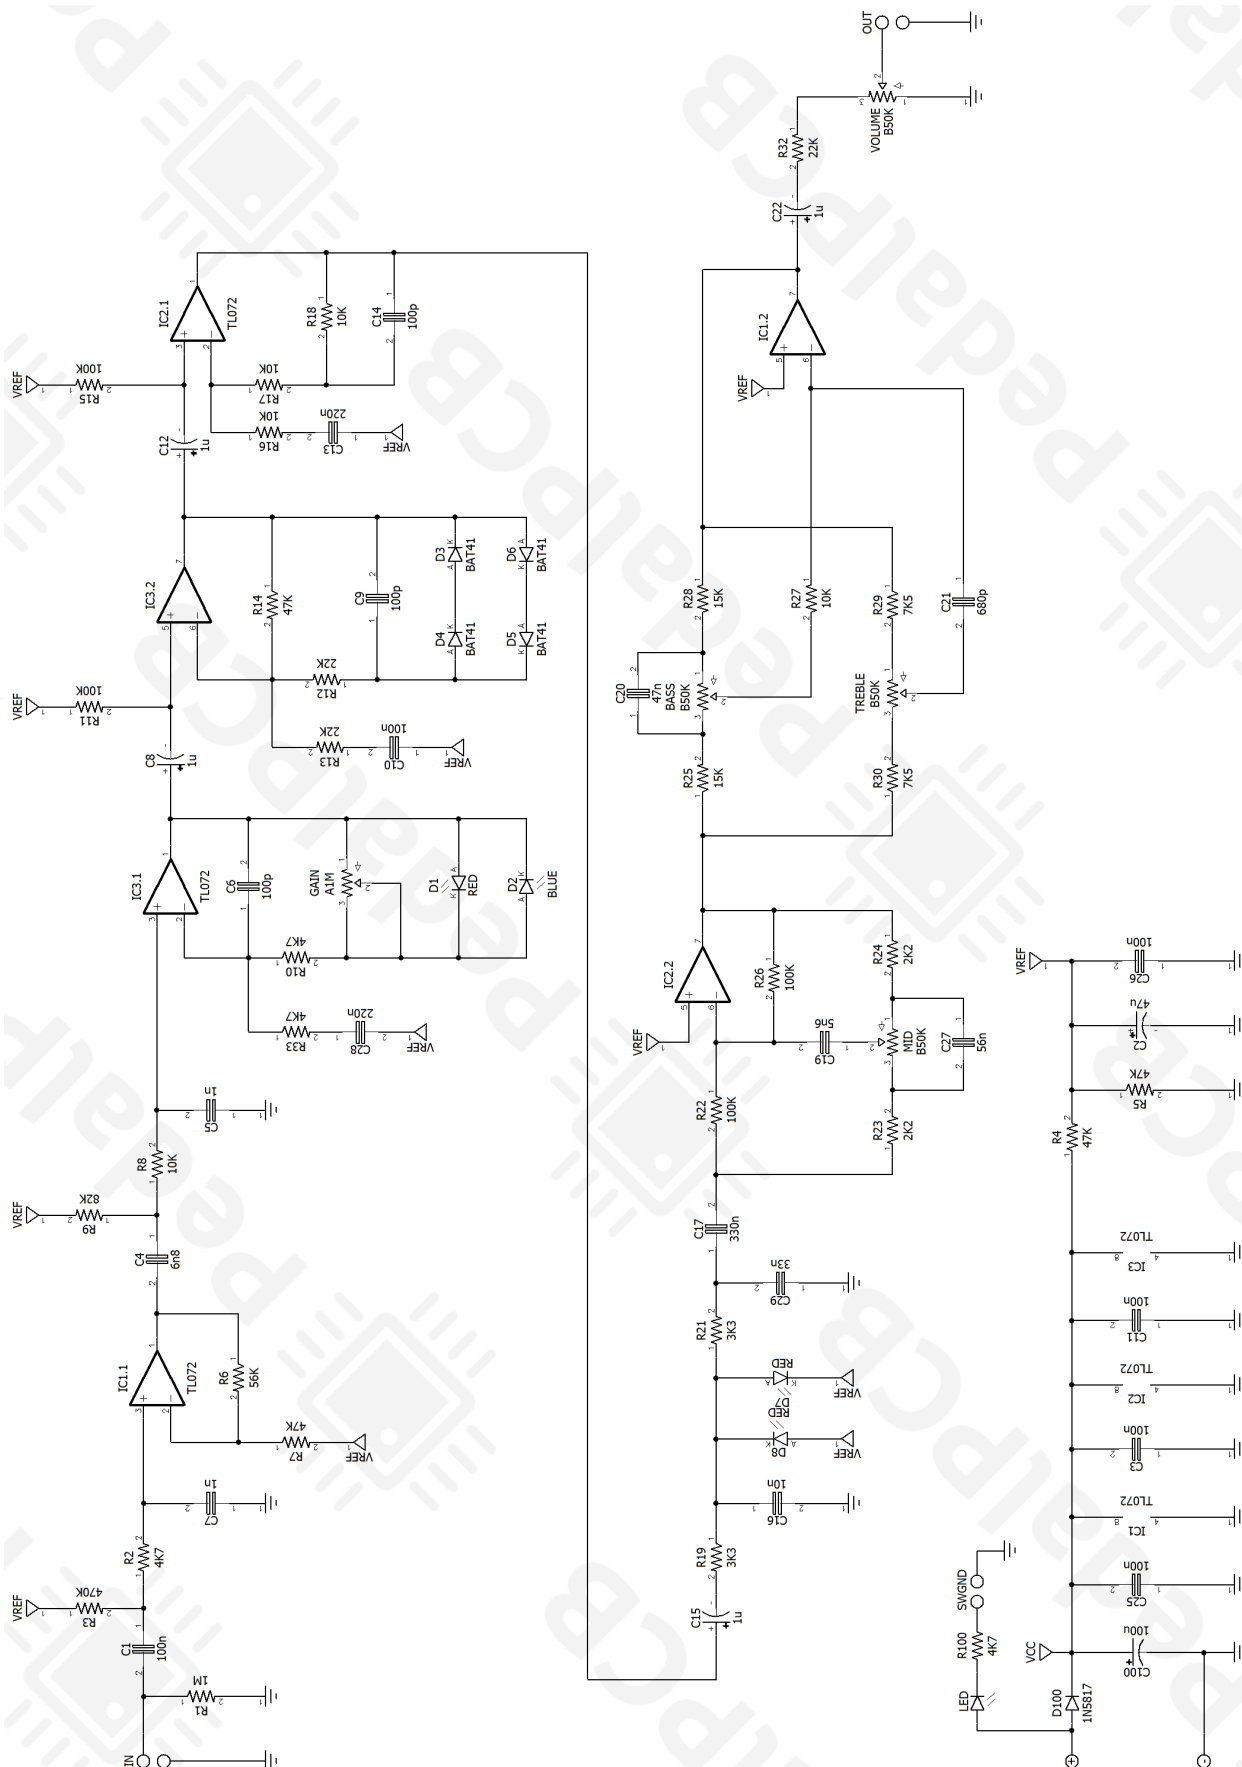

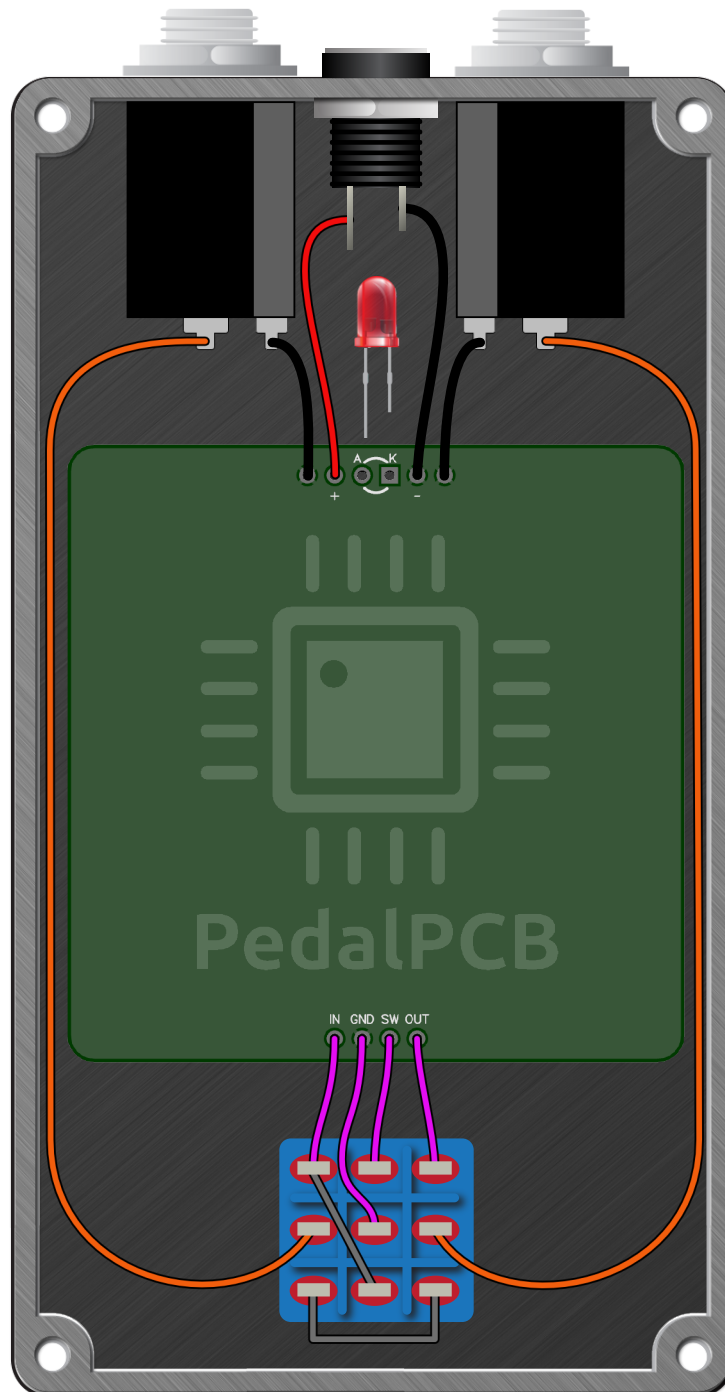

Bolide Distortion

Drill Template
125B Enclosure

