


Revised 4/7/21

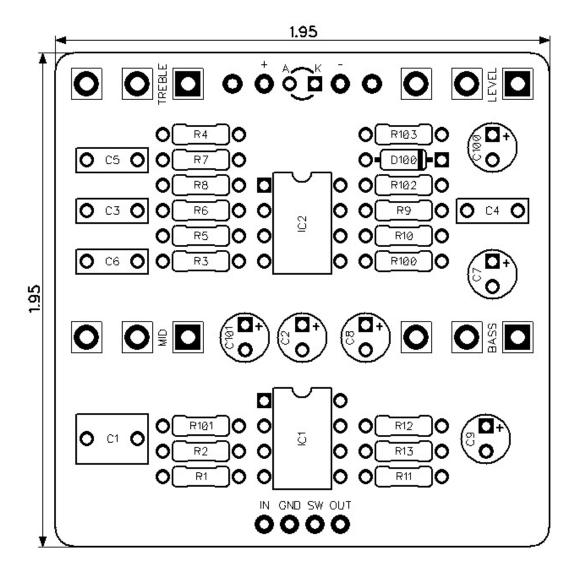

CONTROLS AND FEATURES

- Level
- Treble
- Bass
- Mid

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



Box and All EQ

Parts List (Page 1 of 1)


| Resistor, 1/4 | W VALUE | TYPE | NOTES |
|----------------|---------|----------------------------------|-------|
| R1 | 1M | Resistor, 1/4W | |
| R2 | 1M | Resistor, 1/4W | |
| R3 | 10K | Resistor, 1/4W | |
| R4 | 2K2 | Resistor, 1/4W | |
| R5 | 3K3 | Resistor, 1/4W | |
| R6 | 10K | Resistor, 1/4W | |
| R7 | 2K2 | Resistor, 1/4W | |
| R8 | 3K3 | Resistor, 1/4W | |
| R9 | 10K | Resistor, 1/4W | |
| R10 | 10K | Resistor, 1/4W | |
| R11 | 1M | Resistor, 1/4W | |
| R12 | 470R | Resistor, 1/4W | |
| R13 | 100K | Resistor, 1/4W | |
| R100 | 10K | Resistor, 1/4W | |
| R101 | 10K | Resistor, 1/4W | |
| R102 | 100R | Resistor, 1/4W | |
| R103 | 4K7 | Resistor, 1/4W | |
| 11100 | 411/ | 116313101, 1/477 | |
| C1 | 1u | Film capacitor, 7.2 x 5.0mm | |
| C2 | 1u | Electrolytic capacitor, 5mm | |
| C3 | 4n7 | Film capacitor, 7.2 x 2.5mm | |
| C4 | 47n | Film capacitor, 7.2 x 2.5mm | |
| C4 C5 C6 | 10n | Film capacitor, 7.2 x 2.5mm | |
| C6 | 22n | Film capacitor, 7.2 x 2.5mm | |
| C7 | 10u | Electrolytic capacitor, 5mm | |
| C8 | 10u | Electrolytic capacitor, 5mm | |
| C9 | 10u | Electrolytic capacitor, 5mm | |
| C100 | 100u | Electrolytic capacitor, 5mm | |
| C100 | 100u | Electrolytic capacitor, 5mm | |
| CIUI | Tou | Liectrolytic capacitor, Simili | |
| D100 | 1N5817 | Schottky diode, DO-41 | |
| D 100 | 1110017 | Ochotiky diode, DO-41 | |
| IC1 | TL072 | Dual op-amp, DIP8 | |
| IC1 IC2 | TL072 | Dual op-amp, DIP8 | |
| 102 | 12012 | Duai ορ-απρ, Dir ο | |
| LEVEL | B50K | 16mm right-angle PCB mount pot | |
| TREBLE | B250K | 16mm right-angle PCB mount pot | |
| BASS | B100K | 16mm right-angle PCB mount pot | |
| MID | B100K | 16mm right-angle PCB mount pot | |
| IVIID | DIOOK | Tomin right-angle i Ob mount pot | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

500 100K -WW-- B13 R12 WW-1 470R TL072 5 + F Box and All EQ Schematic Diagram . K10 X X X TL072 IC2.1 8% ≤ ≤ ≤ 8 ₹ 10 8 \$ \$ \$ \$ EWW ↑ BASS B100K TL072 TCS 3K3 \$ ₹ ₹ TL072 ŠÞ ICI PedalPCB R102 √W/ 100R C101 10K -WW-8101 10K -WW-B100 TL072 IC1.1 100n D100 0 **≧**00



Box and All EQ

Wiring Diagram

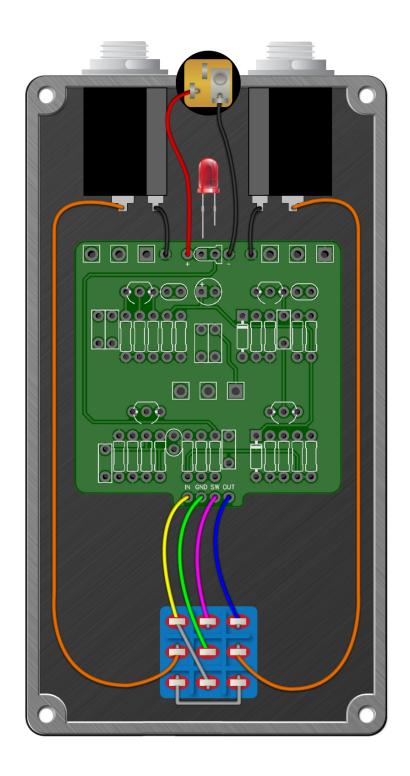



Box and All EQ

Drill Template

125B Enclosure

