

## **CONTROLS AND FEATURES**

- Volume
- Gain
- Fail (Toggle Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




## PedalPCB The Gent Overdrive Parts List (Page 1 of 1)

Parts List (Page 1 of 1)

LOCATION	VALUE	ТҮРЕ	NOTES
R1	2M2	Resistor, 1/4W	
R2	470K	Resistor, 1/4W	
R3	2M2	Resistor, 1/4W	
R4	100R	Resistor, 1/4W	
R5	3K3	Resistor, 1/4W	
R6	330R	Resistor, 1/4W	
R7	330R	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
11100	41\7		
C1	470n	Film capacitor, 7.2 x 5.0mm	
C1 C2 C3 C4 C100	100n	Film capacitor, 7.2 x 2.5mm	
C2	47u	Electrolytic capacitor, 5mm	
<u>C3</u>			
	220n	Film capacitor, 7.2 x 5.0mm	
C100	47u	Electrolytic capacitor, 5mm	
D1	1N914B	Signal diode, DO-35	
D2	1N914B	Signal diode, DO-35	
D2 D3	BAT46	Signal diode, DO-35	
D3 D4			
	BAT46	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
01			
Q1	2N5088	BJT transistor, NPN TO-92	
VOLUME		16mm right angle DCP mount not	
	B100K	16mm right-angle PCB mount pot	
GAIN	B1K	16mm right-angle PCB mount pot	
FAIL	SPDT	Toggle switch, SPDT	3-position (ON/OFF/ON)
		Toggle Switch, SFD1	




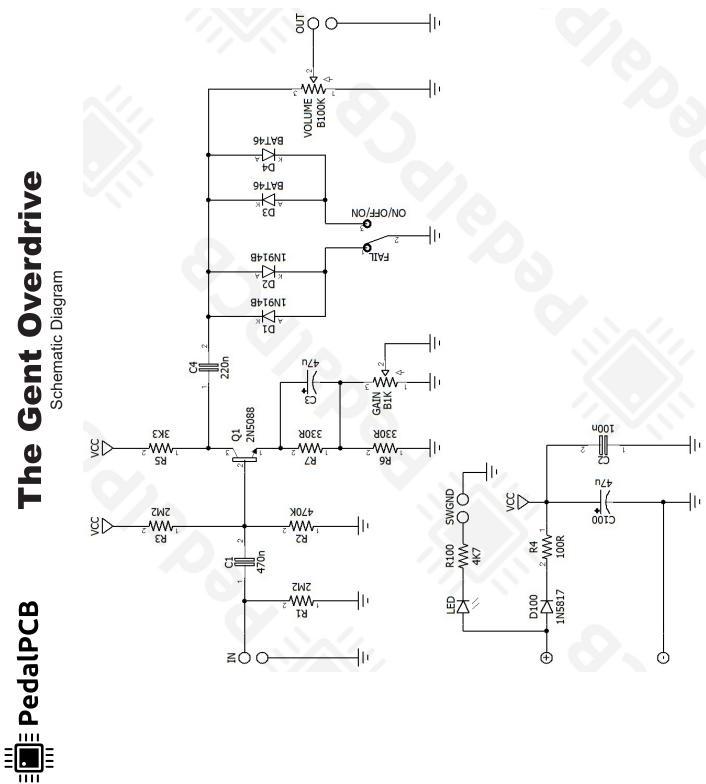



## Image: PedalPCB The Gent Overdrive Wiring Diagram

Wiring Diagram

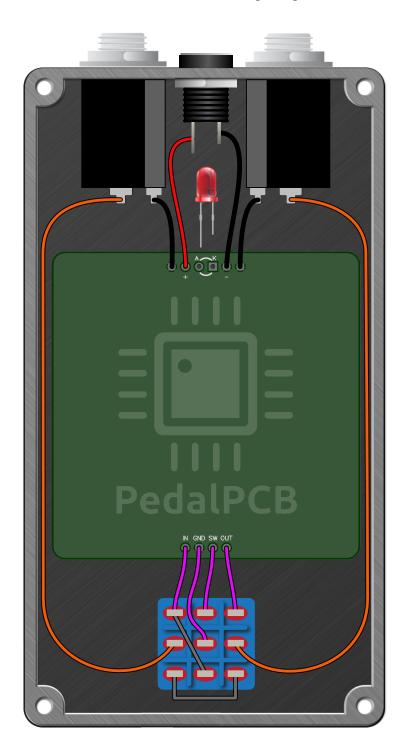



## PedalPCB The Gent Overdrive

Drill Template 125B Enclosure

