




PedalPCB

Guvernator Distortion

Revision 05.05.20

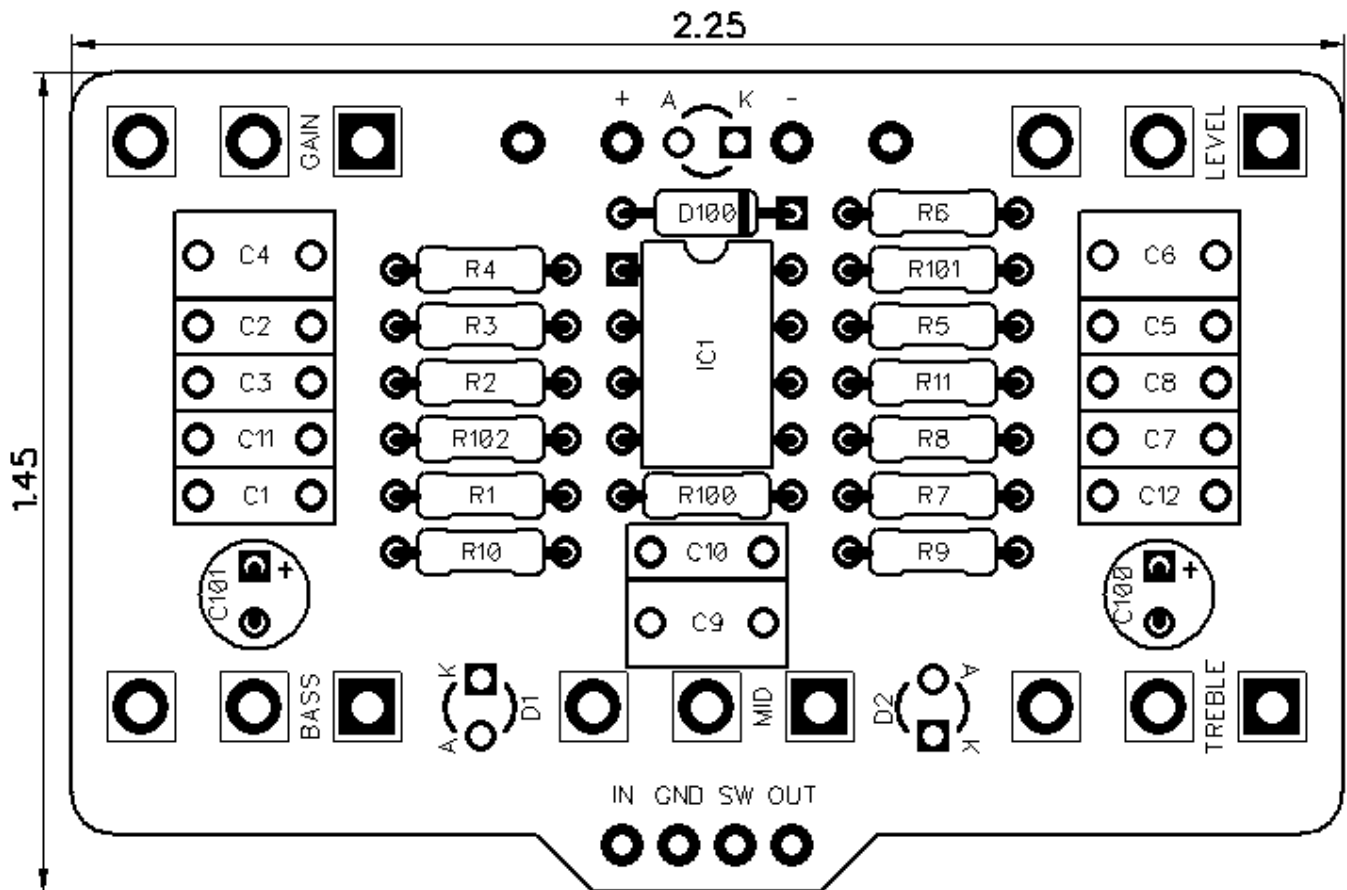

Controls

- Level
- Gain
- Treble
- Mid
- Bass

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

Guvernator Distortion

Parts List

RESISTORS (1/4W)

R1	1M
R2	1M
R3	2K2
R4	10K
R5	680K
R6	1K
R7	1K5
R8	100R
R9	680R
R10	680R
R11	22K
R100	4K7
R101	47K
R102	47K

CAPACITORS

C1	9n6
C2	120p
C3	100n
C4	330n
C5	220p
C6	220n
C7	4n7
C8	10n
C9	220n
C10	100n
C11	68n
C12	470p
C100	100u
C101	10u

INTEGRATED CIRCUITS

IC1	TL072
-----	-------


DIODES

D1	3mm Red LED
D2	3mm Red LED
D100	1N5817

POTENTIOMETERS


LEVEL	B100K
GAIN	B100K
TREBLE	A10K
MID	A10K
BASS	A10K

Guvernator Distortion

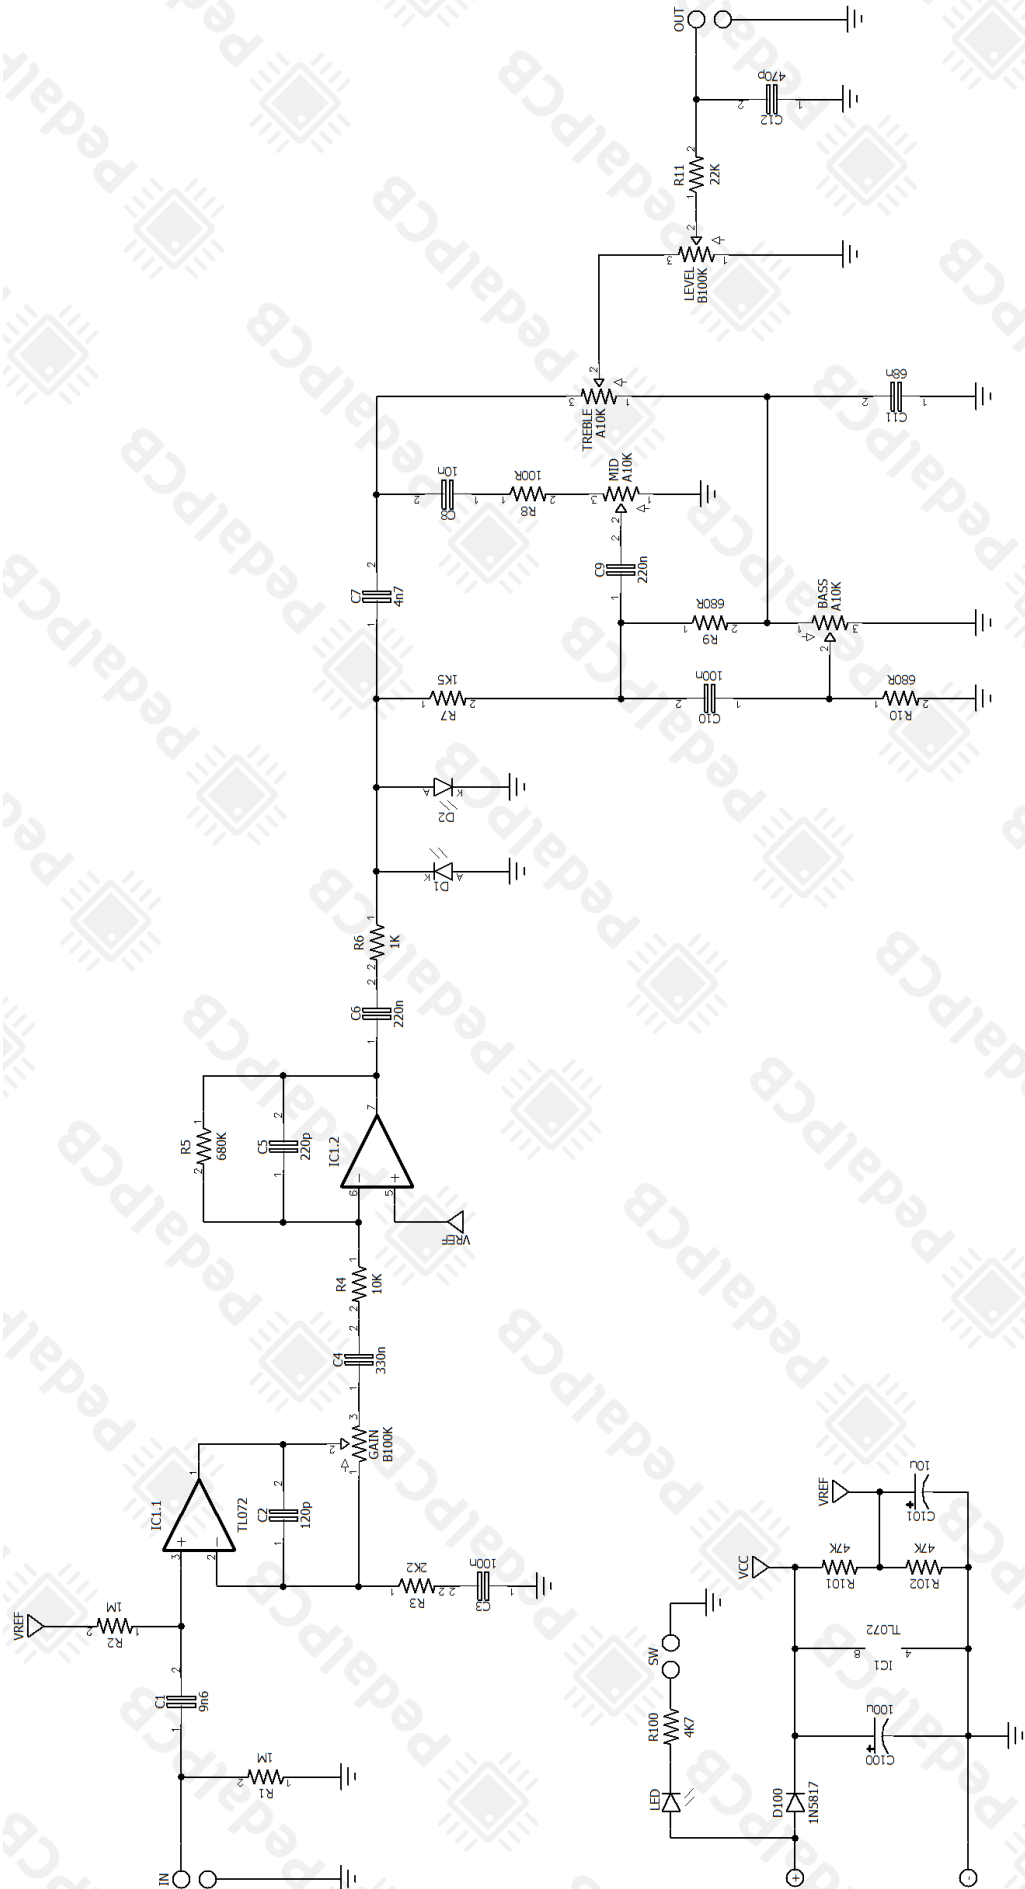

Guvernator Distortion

Wiring Diagram

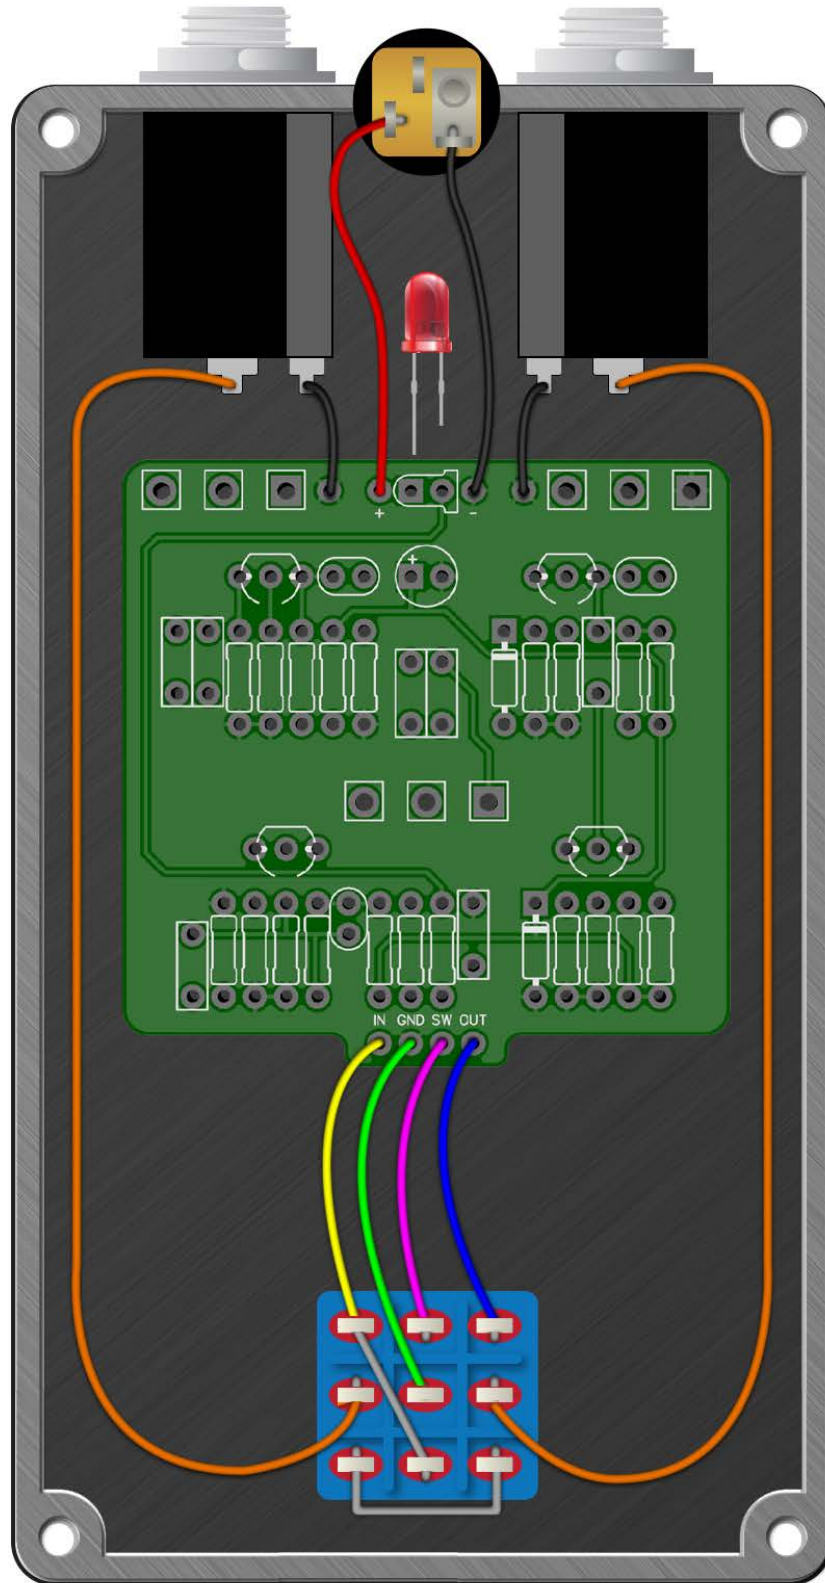

Governator Distortion

Drill Template
125B Enclosure

