


PedalPCB

HAARP

Revision 02.01.20

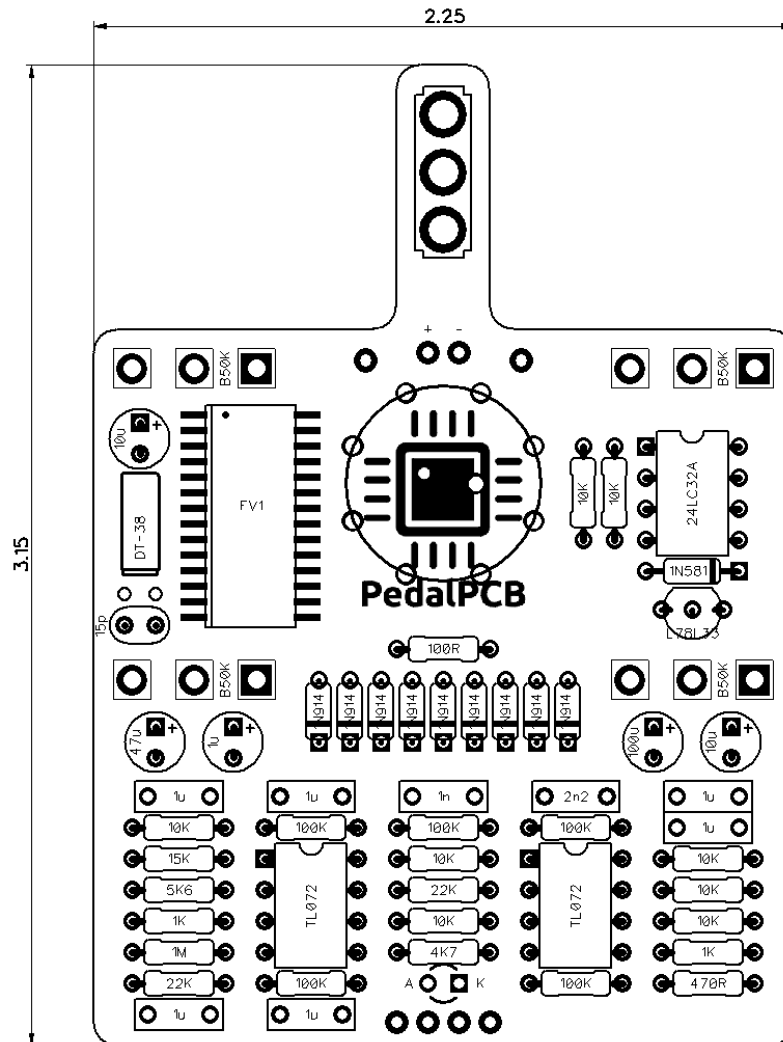

Controls

- **Rate** – Controls the speed of arpeggiation
- **Step** – Sets the number of steps in the arpeggiation pattern
- **Mode** – Sets the arpeggiation pattern
- **Wet** – Adjusts the wet signal level
- **Dry** – Adjusts the dry signal level
- **Direction (Toggle Switch)** – Sets the arpeggiation direction (Up, Alternating, Down)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1	1M
R2	100K
R3	1K
R4	22K
R5	10K
R6	1K
R7	100K
R8	100R
R9	10K
R10	10K
R11	470R
R12	100K
R13	4K7
R14	10K
R15	10K
R16	15K
R17	5K6
R18	10K
R19	22K
R20	10K
R21	10K
R22	100K
R23	100K

CAPACITORS

C1	1u MLCC
C2	1u MLCC
C3	1u MLCC
C4	1n
C5	10u
C6	2n2
C7	15p
C8	1u MLCC
C10	1u ELECTROLYTIC
C11	1u MLCC
C16	100u
C17	10u
C18	47u
C19	1u MLCC

INTEGRATED CIRCUITS

IC1	TL072
IC2	24LC32A
IC3	FV1
IC5	TL072
IC6	L78L33

DIODES

D1	1N5817
D2	1N914
D3	1N914
D4	1N914
D5	1N914
D6	1N914
D7	1N914
D8	1N914
D9	1N914
D10	1N914

POTENTIOMETERS

CTRL1	B50K
CTRL2	B50K
WET	B50K
DRY	B50K

SWITCHES

DIRECTION - SPDT On/Off/On
MODE - 1P8T Mini Rotary

CRYSTALS

X1	AB38T-32.768KHZ
----	-----------------

PedalPCB
HAARP

