




# Jolly Fuzz

Revised 12/15/23

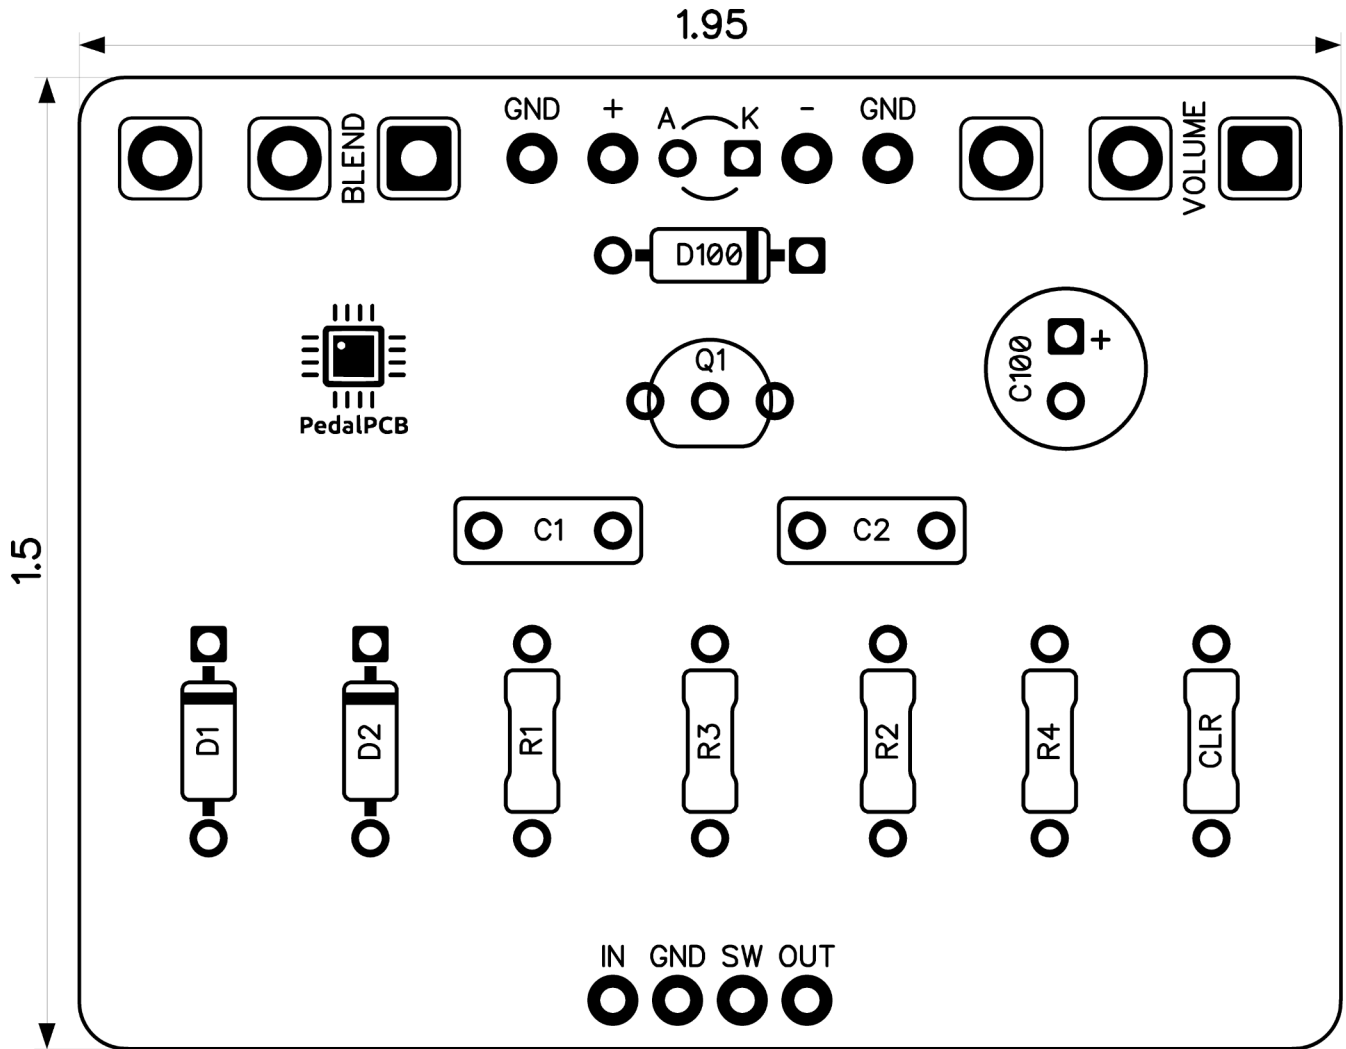

## CONTROLS AND FEATURES

- Volume
- Blend

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	2M2	Resistor, 1/4W	
R3	680R	Resistor, 1/4W	
R4	47K	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	* <i>LED current limiting resistor</i>
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	100n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D1	1N4148	Signal diode, DO-35	
D2	1N4148	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
Q1	2N3904	BJT transistor, NPN TO-92	
VOLUME	A100K	16mm right-angle PCB mount pot	
BLEND	B25K	16mm right-angle PCB mount pot	

# Jolly Fuzz

Schematic Diagram

