


PedalPCB **Sliver Overdrive**

Revised 1/4/21

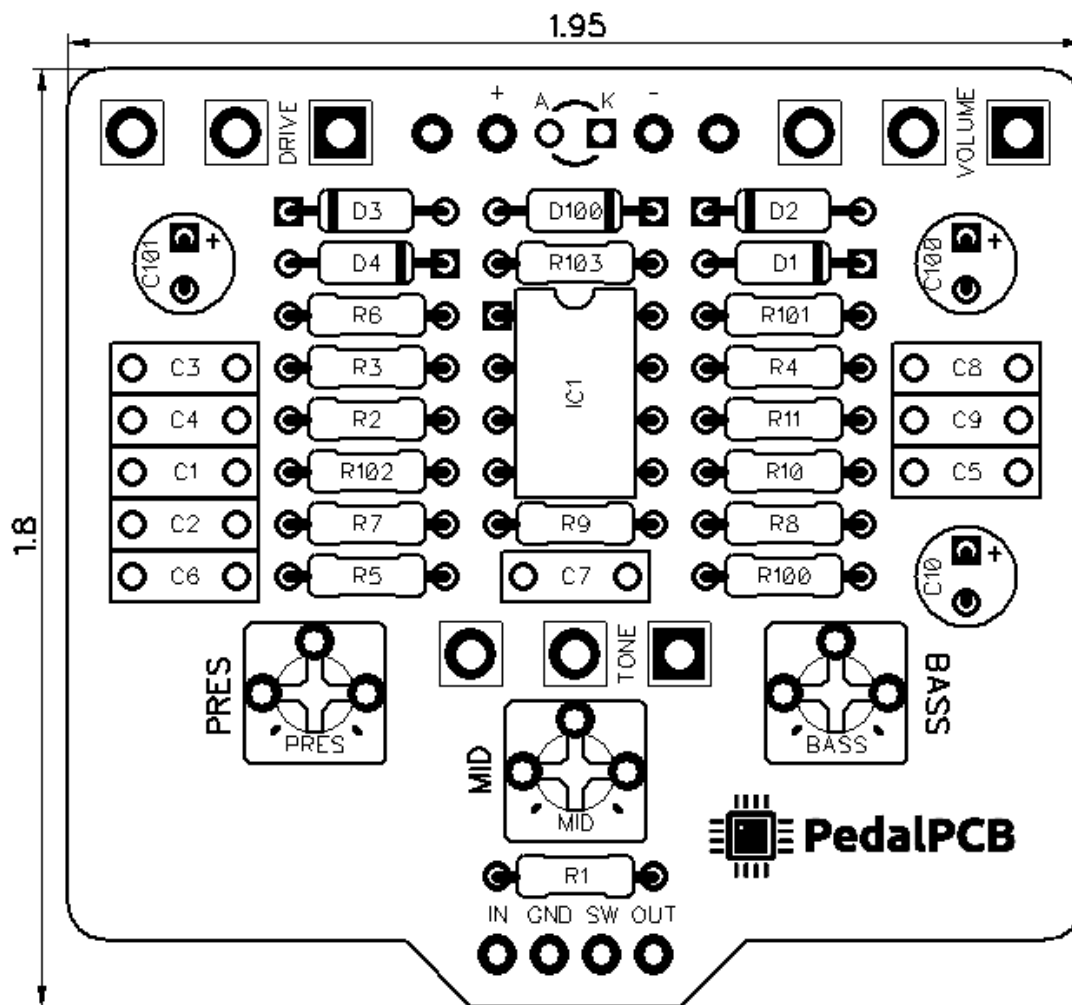



CONTROLS AND FEATURES

- Volume
- Tone
- Drive
- Bass (Internal trimpot)
- Mid (Internal trimpot)
- Presence (Internal trimpot)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	470K	Resistor, 1/4W	
R3	10K	Resistor, 1/4W	
R4	13K3	Resistor, 1/4W	
R5	470R	Resistor, 1/4W	
R6	1K	Resistor, 1/4W	
R7	3K6	Resistor, 1/4W	
R8	1K8	Resistor, 1/4W	
R9	150K	Resistor, 1/4W	
R10	470K	Resistor, 1/4W	
R11	3K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
R102	10K	Resistor, 1/4W	
R103	91R	Resistor, 1/4W	
C1	56n	Film capacitor, 7.2 x 2.5mm	
C2	100p	Ceramic capacitor	
C3	27n	Film capacitor, 7.2 x 2.5mm	
C4	10n	Film capacitor, 7.2 x 2.5mm	
C5	20n	Film capacitor, 7.2 x 2.5mm	
C6	10n	Film capacitor, 7.2 x 2.5mm	
C7	56n	Film capacitor, 7.2 x 2.5mm	
C8	56n	Film capacitor, 7.2 x 2.5mm	
C9	10n	Film capacitor, 7.2 x 2.5mm	
C10	4u7	Electrolytic capacitor, 5mm	
C100	100u	Electrolytic capacitor, 5mm	
C101	47u	Electrolytic capacitor, 5mm	
D1	1N4148	Signal diode, DO-35	
D2	1N4148	Signal diode, DO-35	
D3	1N4148	Signal diode, DO-35	
D4	1N4148	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
IC1	JRC4559D	Dual op-amp, DIP8	
VOLUME	A100K	16mm right-angle PCB mount pot	
TONE	B100K	16mm right-angle PCB mount pot	
DRIVE	A1M	16mm right-angle PCB mount pot	
BASS	50K	Trim potentiometer	3362P-type
PRES	10K	Trim potentiometer	3362P-type
MID	10K	Trim potentiometer	3362P-type

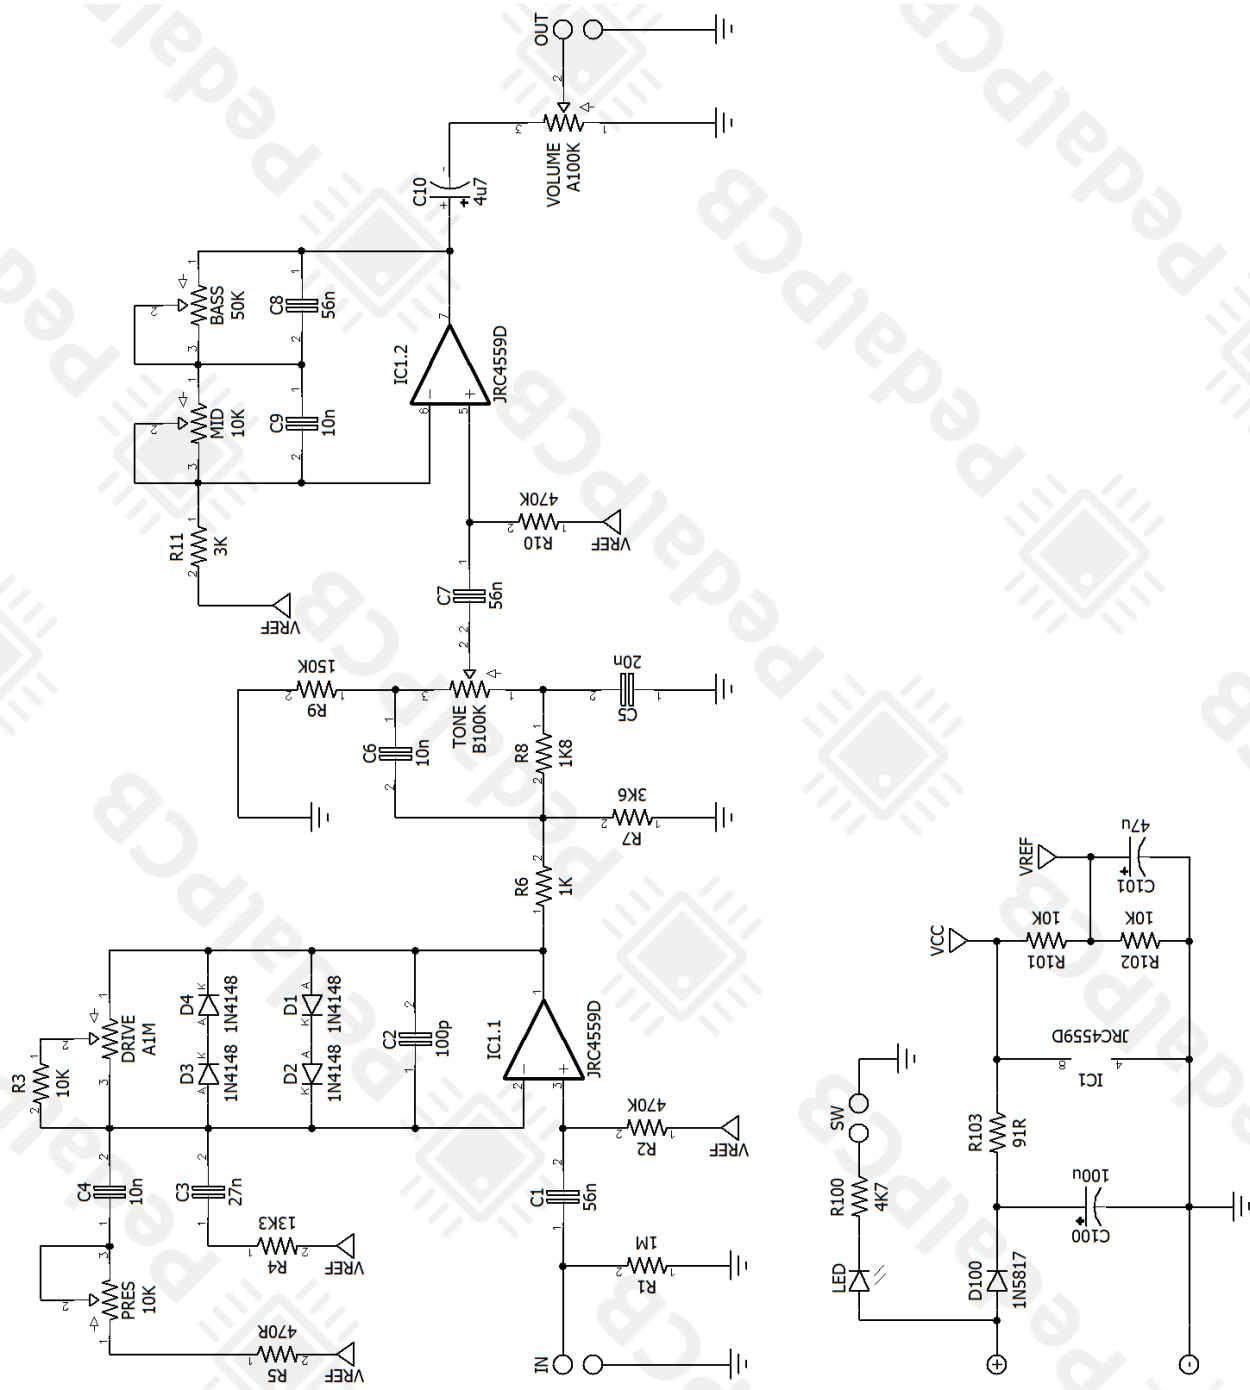

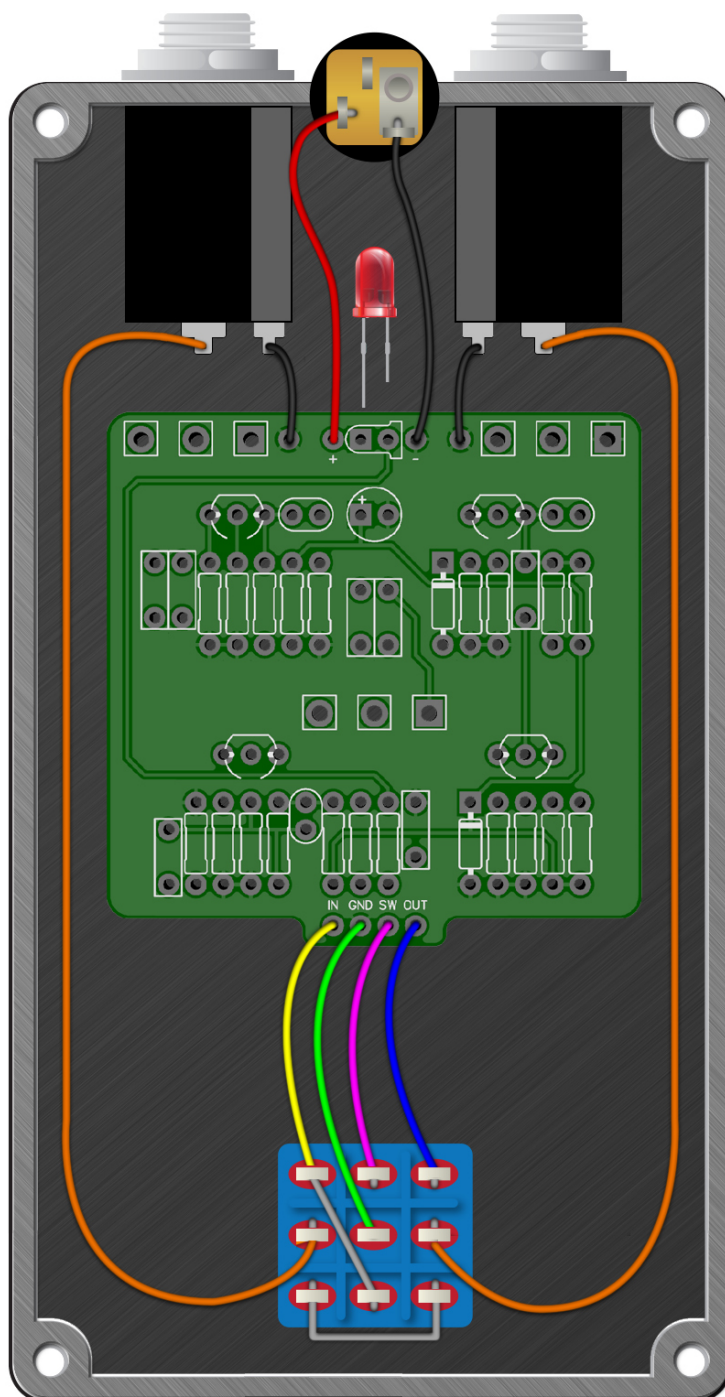

Sliver Overdrive

Drill Template
125B Enclosure

