




PedalPCB

ReproFuzz

Revision 01.31.19

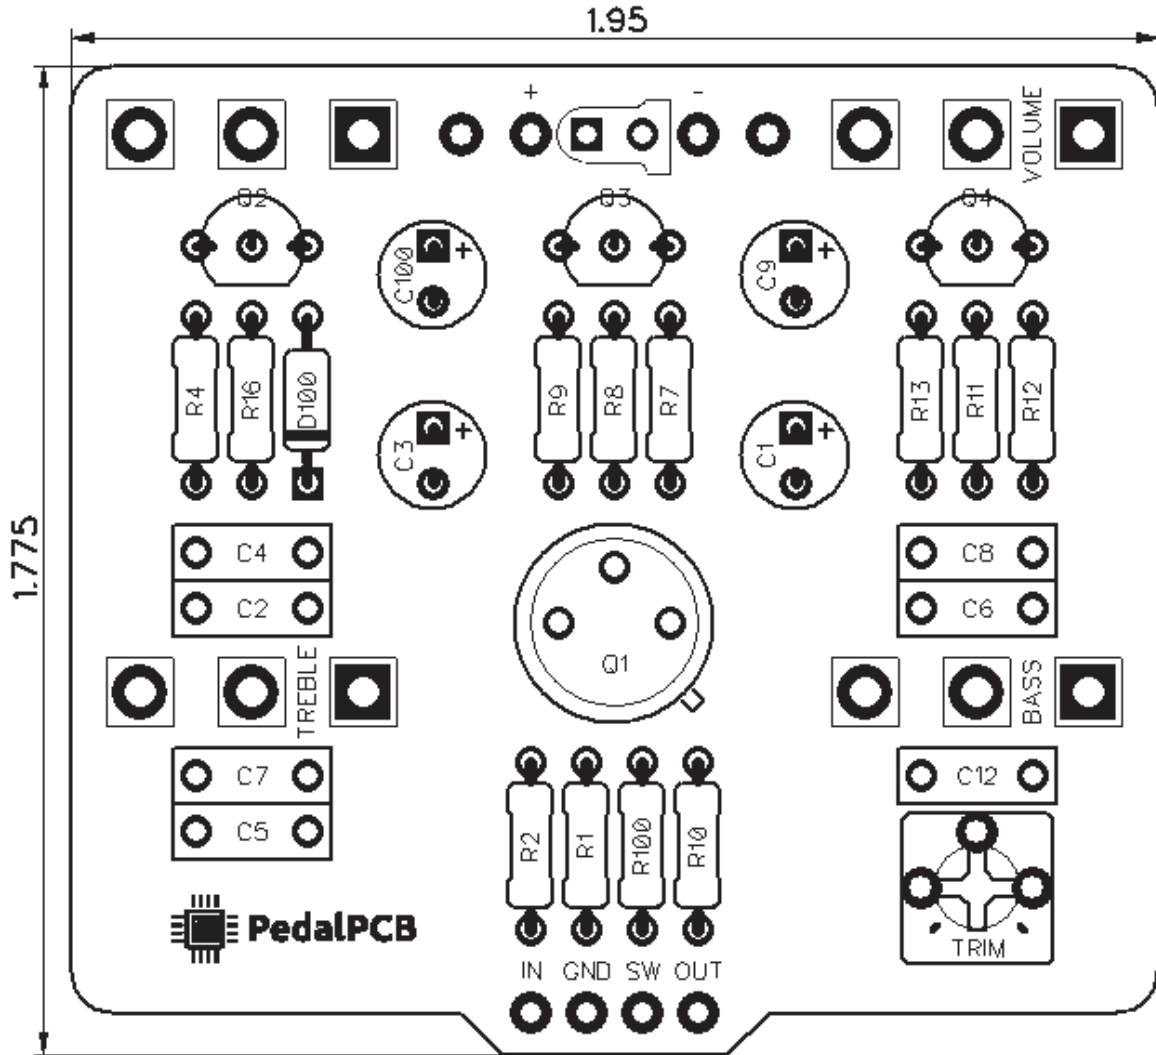

Controls

- Volume
- Gain
- Bass
- Treble
- Bias (Trimpot)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 3K3
R2 1M
R4 100K
R7 220R
R8 4K7
R9 100K
R10 4K7
R11 220K
R12 220K
R13 10K
R16 100K
R100 4K7

CAPACITORS

C1 2u2
C2 470p
C3 33u
C4 150p
C5 47n
C6 22n
C7 100n
C8 100n
C9 100u
C12 10n
C100 100u

TRANSISTORS

Q1 2N1304
Q2 2N5088
Q3 2N5087
Q4 2N5088

DIODES


D100 1N5817

POTENTIOMETERS

GAIN C1K
VOLUME A500K
BASS B250K
TREBLE B250K

TRIM POTS (3362P)

TRIM 100K

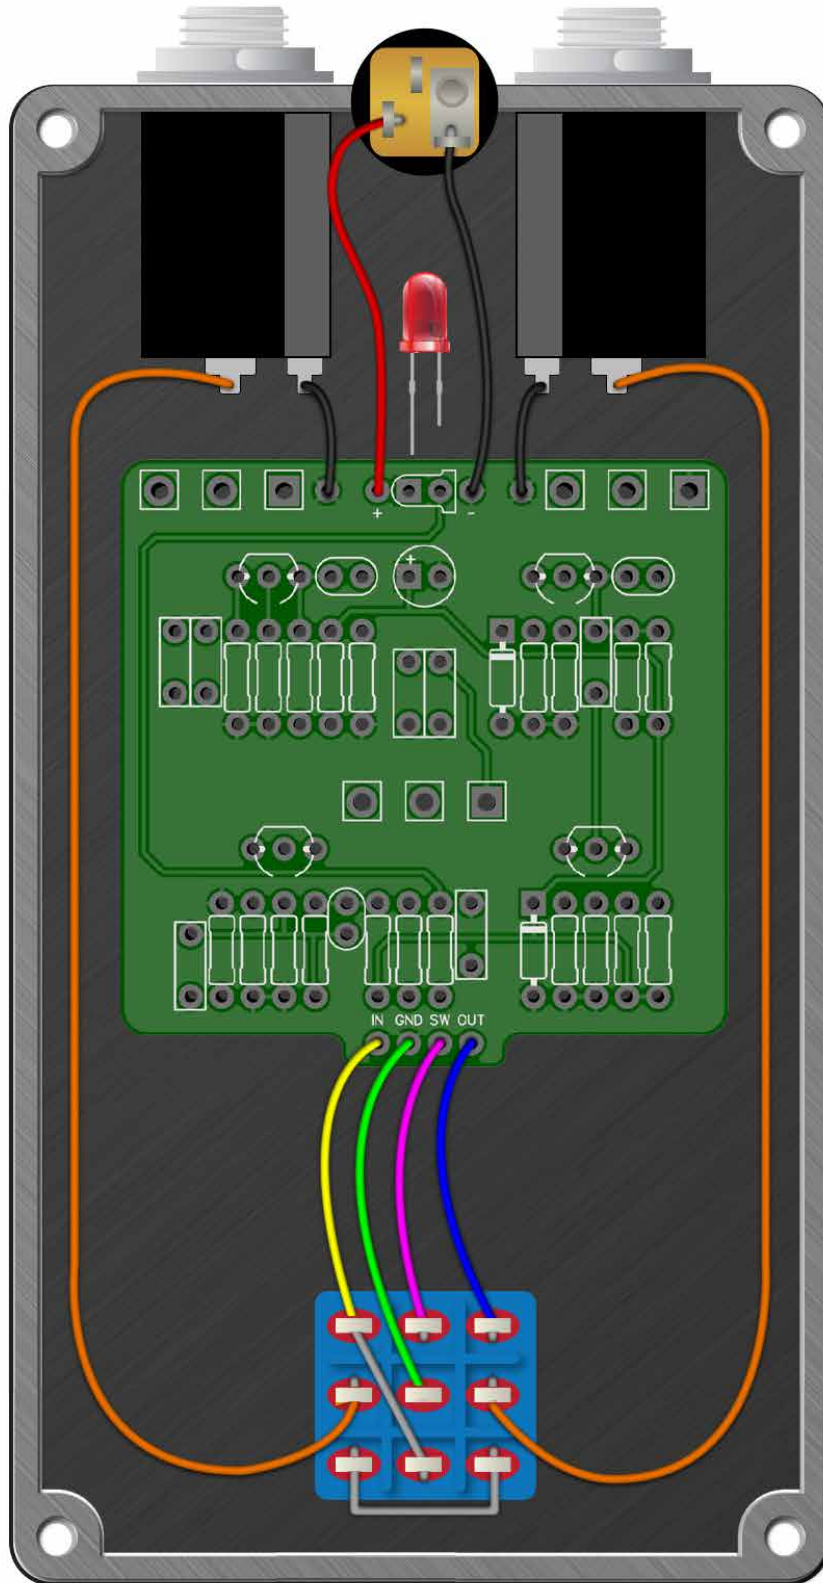

ReproFuzz

Drill Template
125B enclosure with top mounted jacks

