


PedalPCB

Roboto (2020 Edition)

Revision 12.31.20

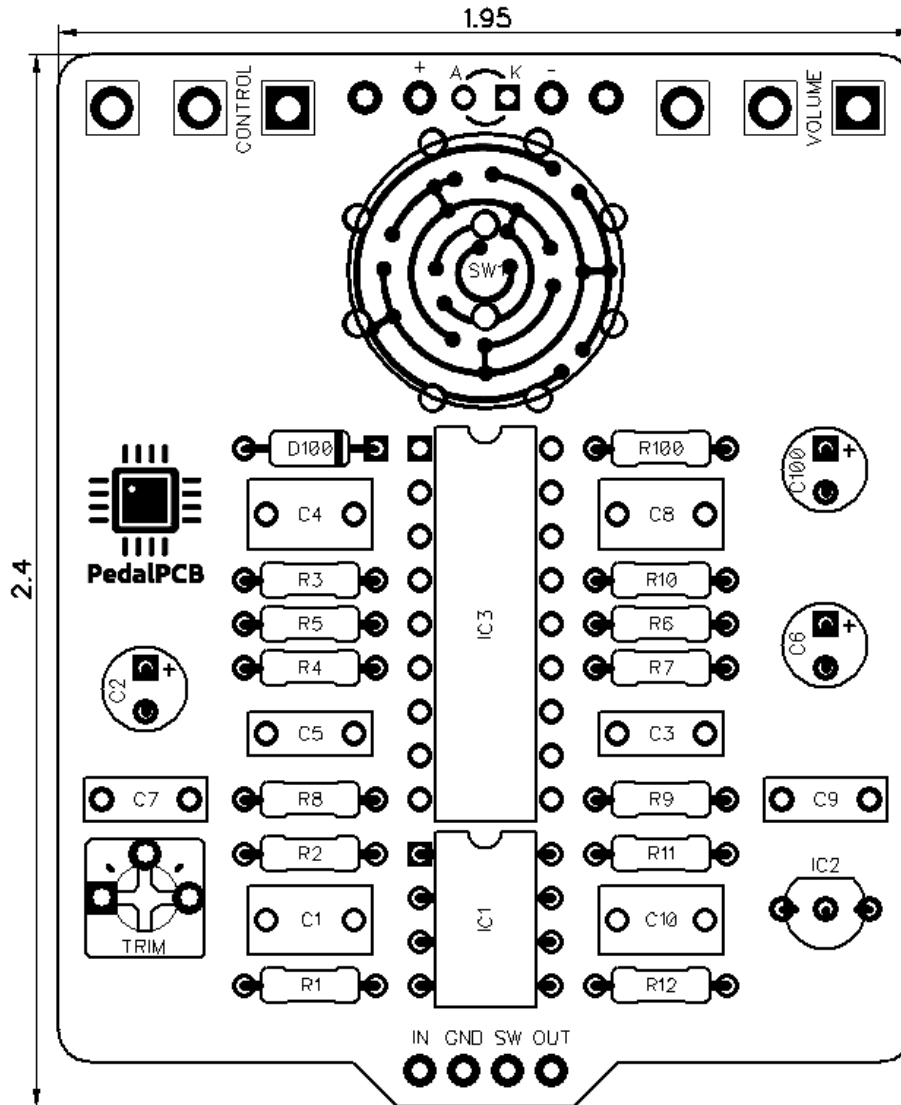

Controls

- Volume
- Control
- Mode (Rotary Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1	1M
R2	27K
R3	10K
R4	1K5
R5	43K
R6	100K
R7	5K6
R8	330R
R9	10K
R10	27K
R11	430K
R12	10K
R100	4K7

CAPACITORS

C1	330n
C2	47u
C3	100n
C4	330n
C5	100n
C6	2u2
C7	100n
C8	330n
C9	470p
C10	330n
C100	100u

INTEGRATED CIRCUITS

IC1	TL072
IC2	L78L33
IC3	HT8950

DIODES

D100	1N5817
------	--------

POTENTIOMETERS

VOLUME	A100K
CONTROL	B500K

TRIM POTS (3362P Type)

TRIM	1M
------	----

ROTARY SWITCHES

SW1	2P4T Mini Rotary
-----	------------------

2P4T 16mm Mini Rotary Switch

<https://www.pedalpcb.com/product/mini-rotary-switch-2p4t/>

