


PedalPCB

Viceroy Overdrive

Revised 7/15/21

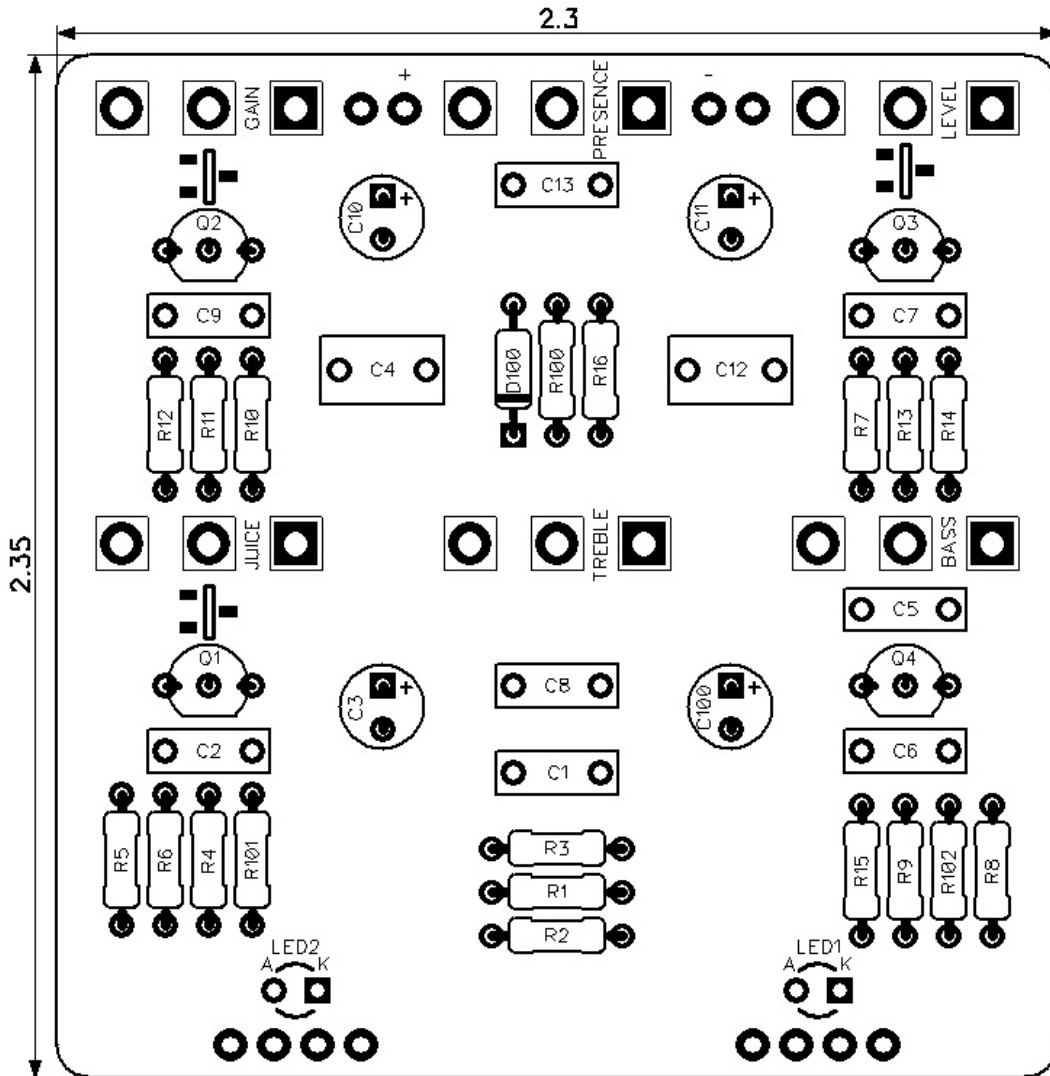

CONTROLS AND FEATURES

Knobs


- Level
- Presence
- Gain
- Bass
- Treble
- Juice


Footswitches

- Active/Bypass
- Juice

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	68K	Resistor, 1/4W	
R3	1M	Resistor, 1/4W	
R4	1K8	Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	10K	Resistor, 1/4W	
R7	100K	Resistor, 1/4W	
R8	22K	Resistor, 1/4W	
R9	100K	Resistor, 1/4W	
R10	22K	Resistor, 1/4W	
R11	10K	Resistor, 1/4W	
R12	560R	Resistor, 1/4W	
R13	1M	Resistor, 1/4W	
R14	1M	Resistor, 1/4W	
R15	10K	Resistor, 1/4W	
R16	4K7	Resistor, 1/4W	
R100	100R	Resistor, 1/4W	
R101	4K7	Resistor, 1/4W	
R102	4K7	Resistor, 1/4W	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C2	100p	Ceramic capacitor	
C3	22u	Electrolytic capacitor, 5mm	
C4	220n	Film capacitor, 7.2 x 5.0mm	
C5	2n2	Film capacitor, 7.2 x 2.5mm	
C6	22n	Film capacitor, 7.2 x 2.5mm	
C7	1n	Film capacitor, 7.2 x 2.5mm	
C8	4n7	Film capacitor, 7.2 x 2.5mm	
C9	470p	Ceramic capacitor	
C10	10u	Electrolytic capacitor, 5mm	
C11	10u	Electrolytic capacitor, 5mm	
C12	220n	Film capacitor, 7.2 x 5.0mm	
C13	2n2	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	PF5102	JFET transistor, N-channel	
Q2	PF5102	JFET transistor, N-channel	
Q3	PF5102	JFET transistor, N-channel	
Q4	2N5089	BJT transistor, NPN TO-92	
LEVEL	A100K	16mm right-angle PCB mount pot	
PRESENCE	C100K	16mm right-angle PCB mount pot	
GAIN	A1M	16mm right-angle PCB mount pot	
BASS	A1M	16mm right-angle PCB mount pot	
TREBLE	A1M	16mm right-angle PCB mount pot	
JUICE	C1K	16mm right-angle PCB mount pot	

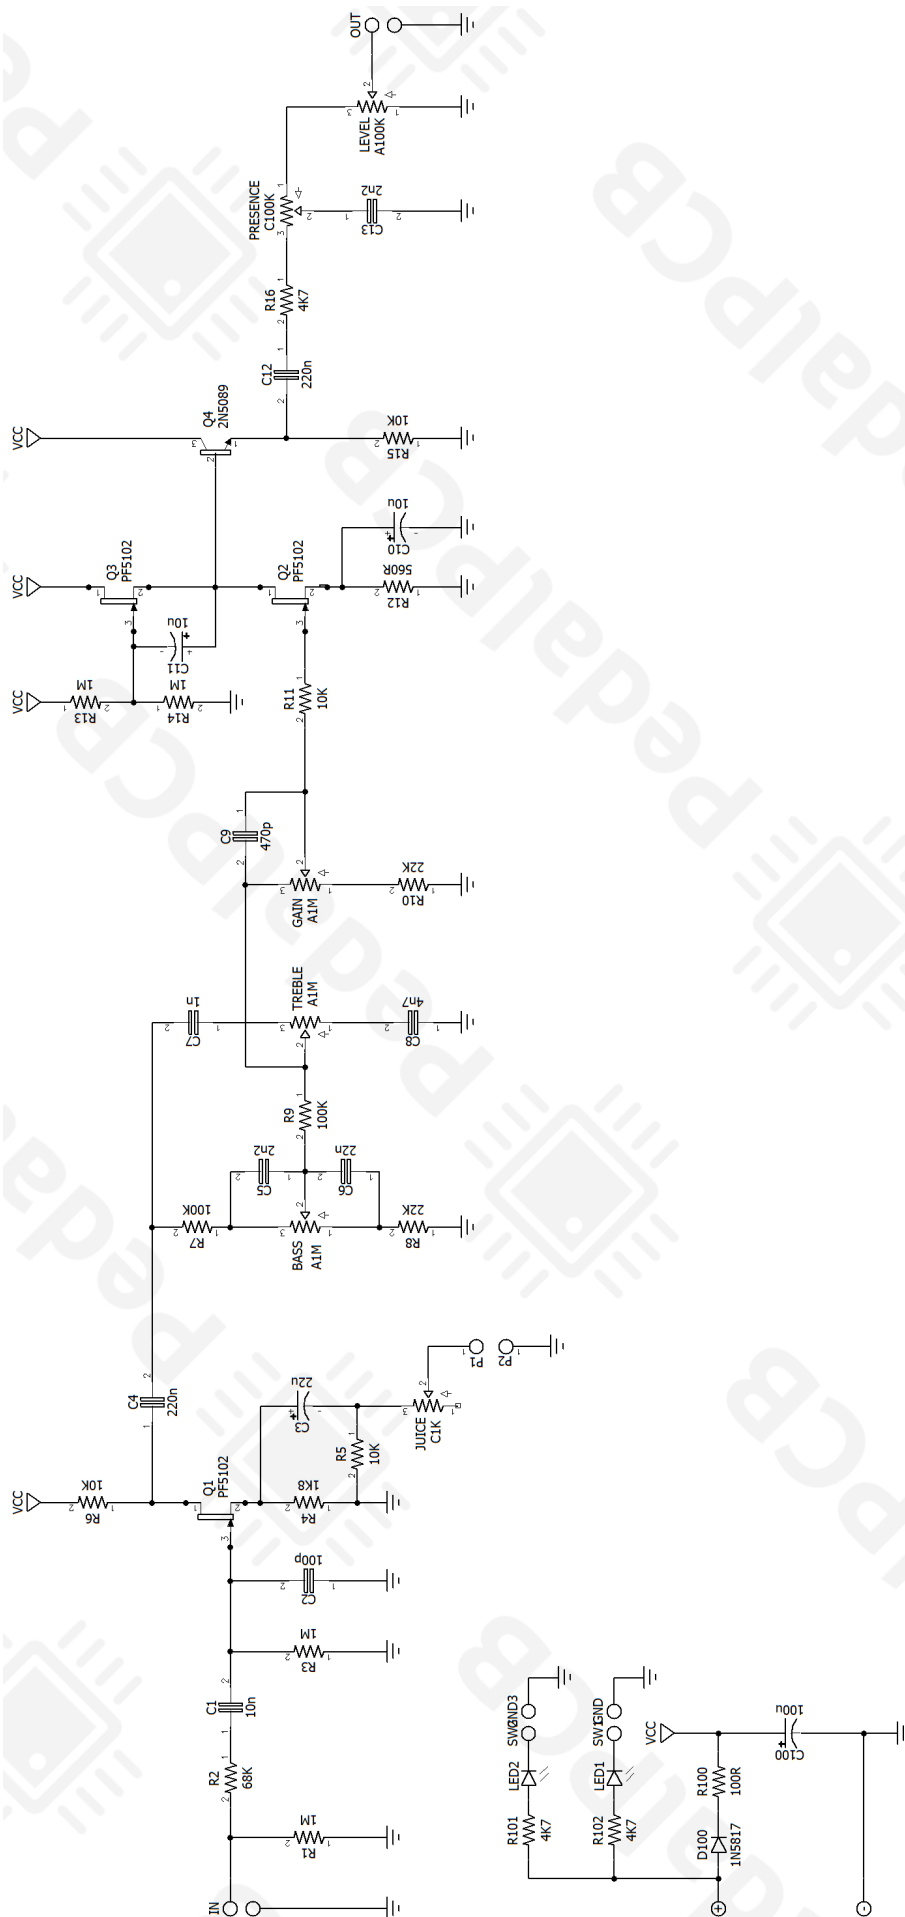

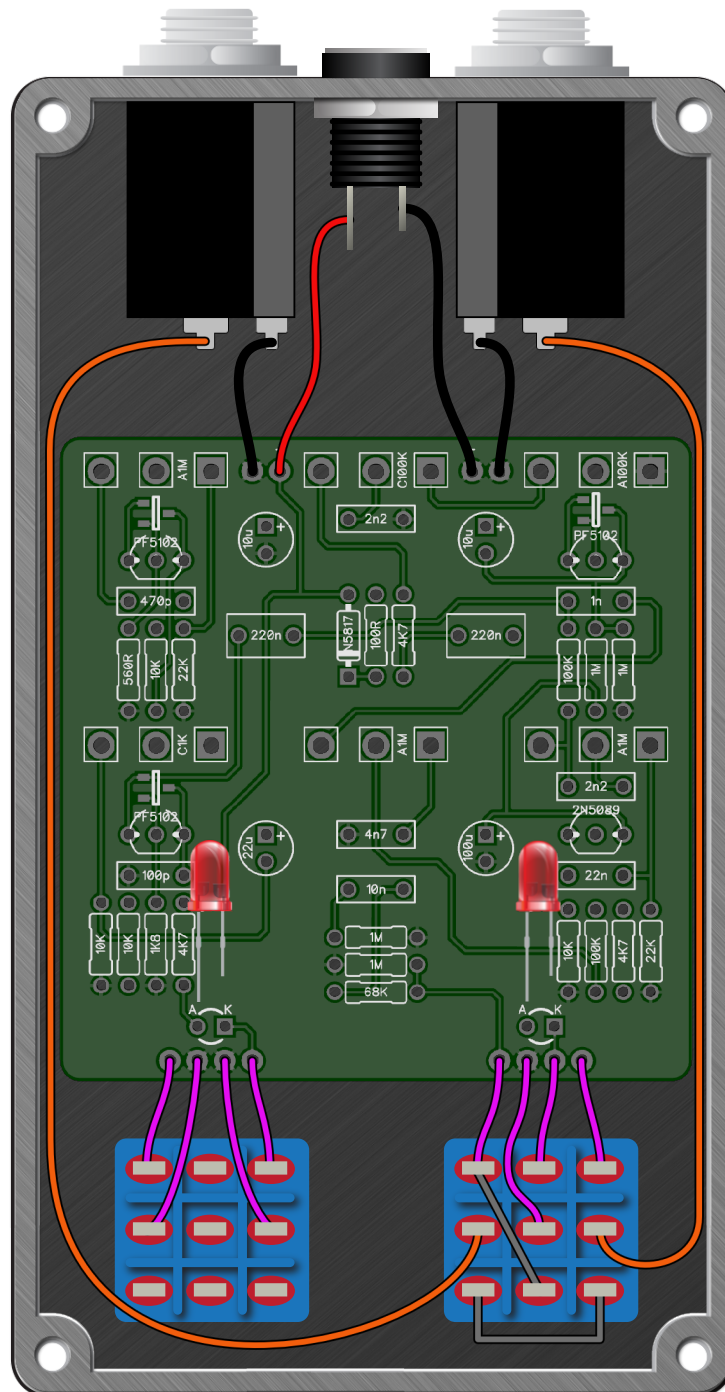

Viceroy Overdrive

Drill Template
125B Enclosure

