




6-Band EQ

Revised 12/2/21

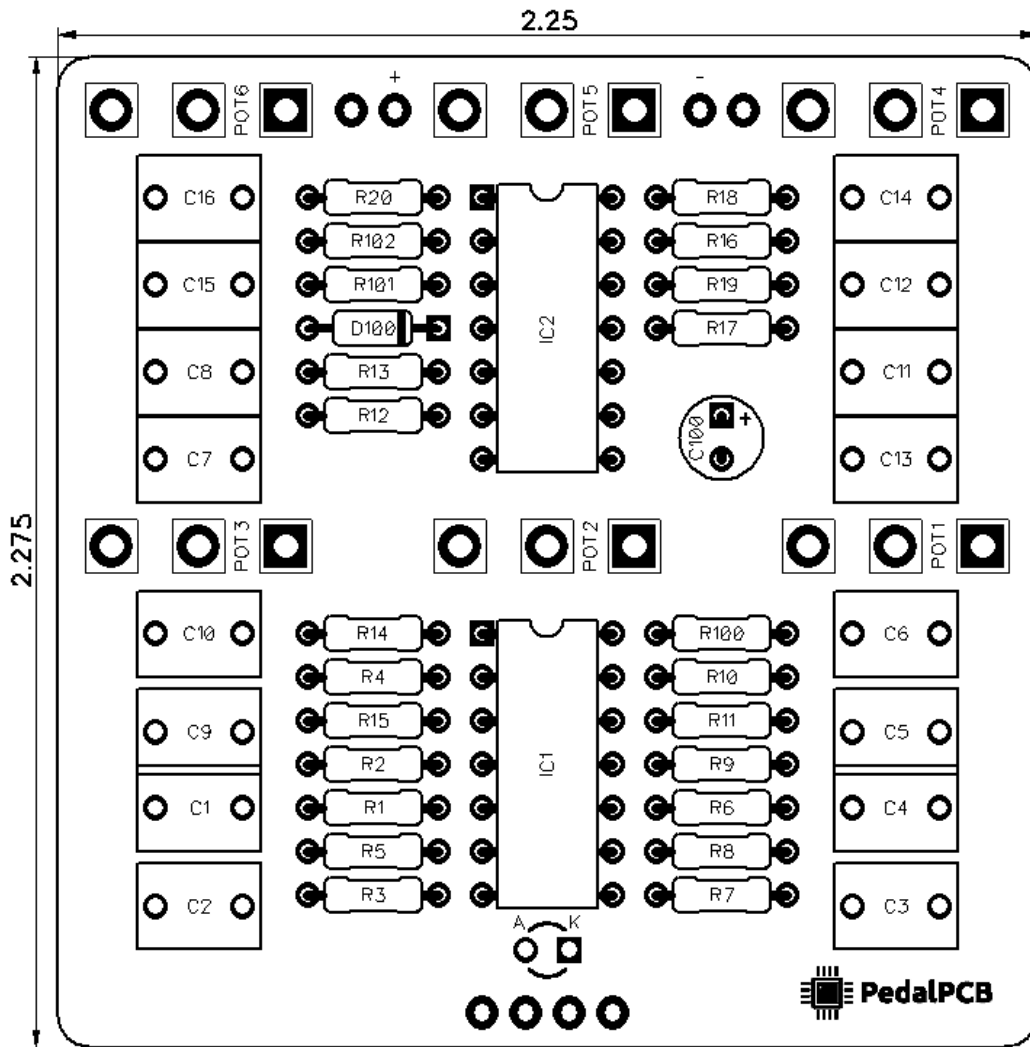

CONTROLS AND FEATURES


- Band 1 - 100 Hz
- Band 2 - 200 Hz
- Band 3 - 400 Hz
- Band 4 - 800 Hz
- Band 5 - 1.6 KHz
- Band 6 - 3.2 KHz

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1K	Resistor, 1/4W	
R2	470K	Resistor, 1/4W	
R3	10K	Resistor, 1/4W	
R4	10K	Resistor, 1/4W	
R5	1K	Resistor, 1/4W	
R6	10K	Resistor, 1/4W	
R7	10K	Resistor, 1/4W	
R8	10K	Resistor, 1/4W	
R9	10K	Resistor, 1/4W	
R10	470R	Resistor, 1/4W	
R11	24K	Resistor, 1/4W	
R12	470R	Resistor, 1/4W	
R13	24K	Resistor, 1/4W	
R14	470R	Resistor, 1/4W	
R15	22K	Resistor, 1/4W	
R16	470R	Resistor, 1/4W	
R17	22K	Resistor, 1/4W	
R18	470R	Resistor, 1/4W	
R19	20K	Resistor, 1/4W	
R20	1K2	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	330K	Resistor, 1/4W	
R102	470K	Resistor, 1/4W	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	10n	Film capacitor, 7.2 x 2.5mm	
C3	1u	Film capacitor, 7.2 x 5.0mm	
C4	10n	Film capacitor, 7.2 x 2.5mm	
C5	220n	Film capacitor, 7.2 x 5.0mm	
C6	1u	Film capacitor, 7.2 x 5.0mm	
C7	120n	Film capacitor, 7.2 x 2.5mm	
C8	470n	Film capacitor, 7.2 x 5.0mm	
C9	68n	Film capacitor, 7.2 x 2.5mm	
C10	220n	Film capacitor, 7.2 x 5.0mm	
C11	33n	Film capacitor, 7.2 x 2.5mm	
C12	120n	Film capacitor, 7.2 x 2.5mm	
C13	15n	Film capacitor, 7.2 x 2.5mm	
C14	68n	Film capacitor, 7.2 x 2.5mm	
C15	100n	Film capacitor, 7.2 x 2.5mm	
C16	68n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
IC1	TL074	Quad op-amp, DIP14	
IC2	TL074	Quad op-amp, DIP14	
POT1 - 6	B50K	16mm right-angle PCB mount pot	


6-Band EQ

Schematic Diagram

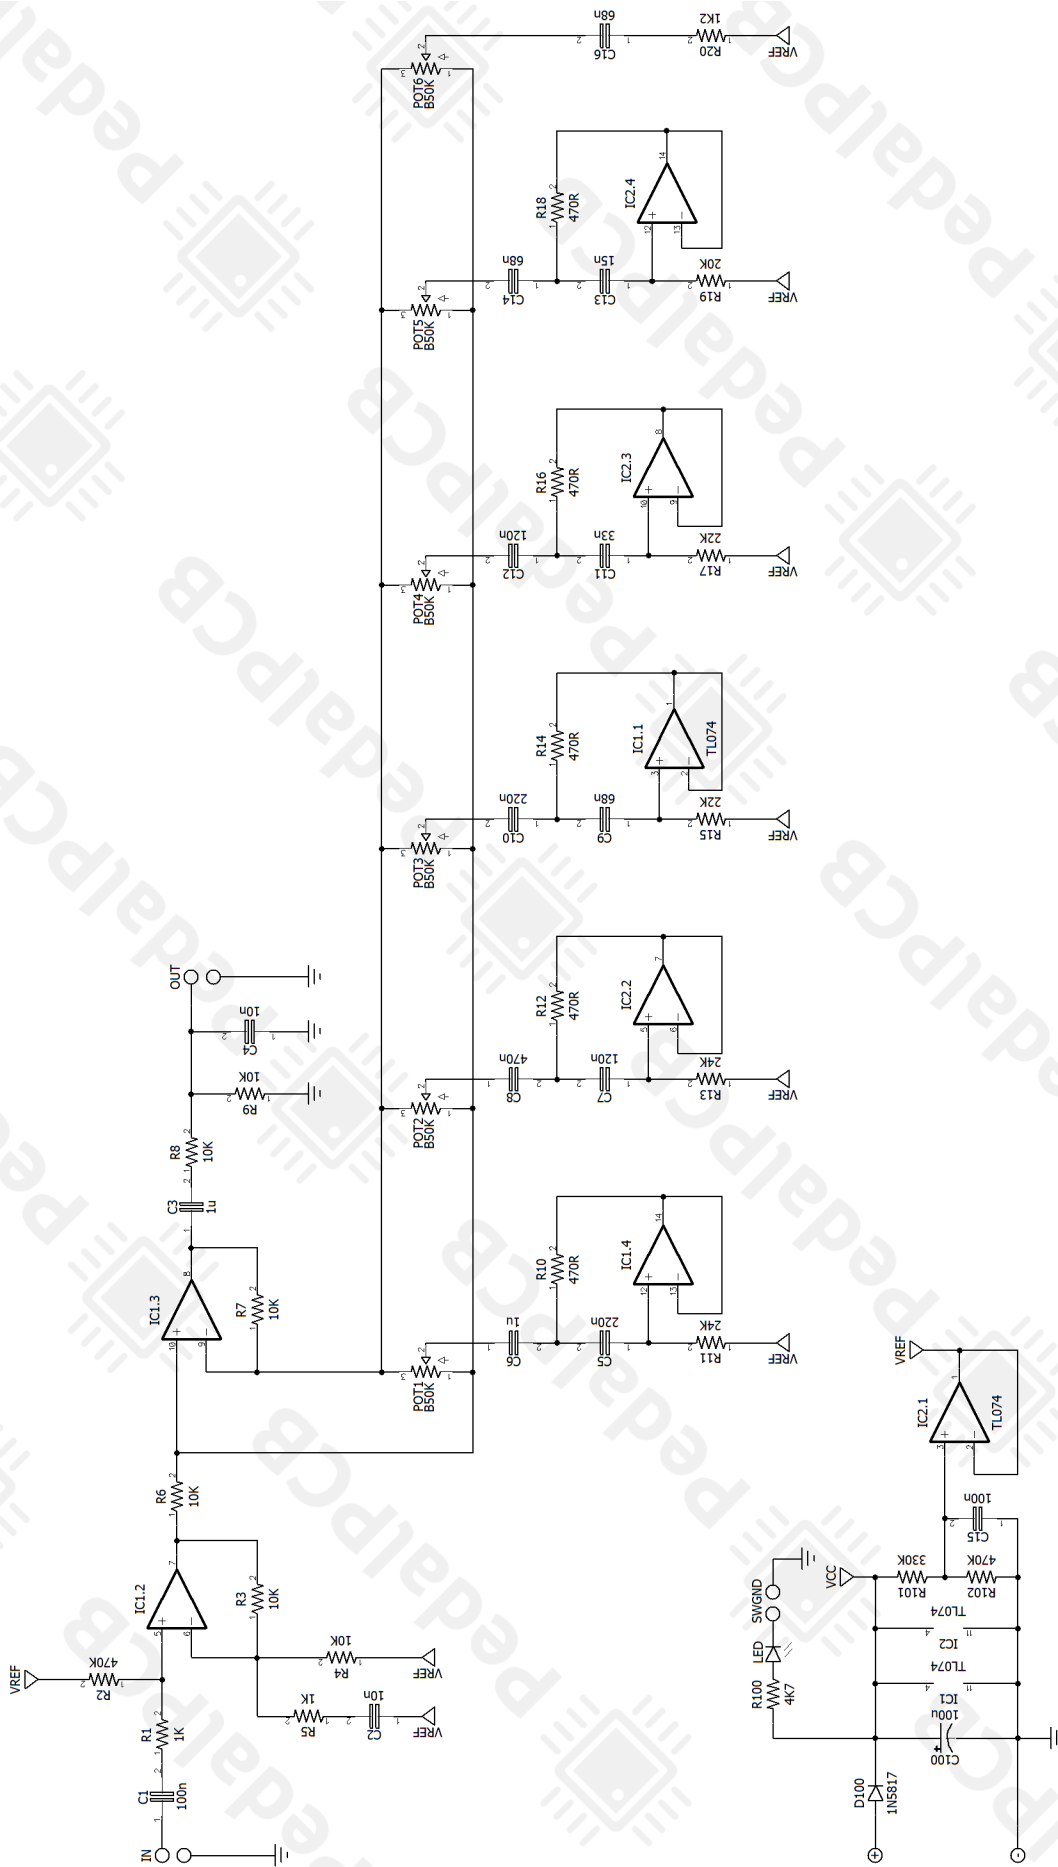

6-Band EQ

Wiring Diagram

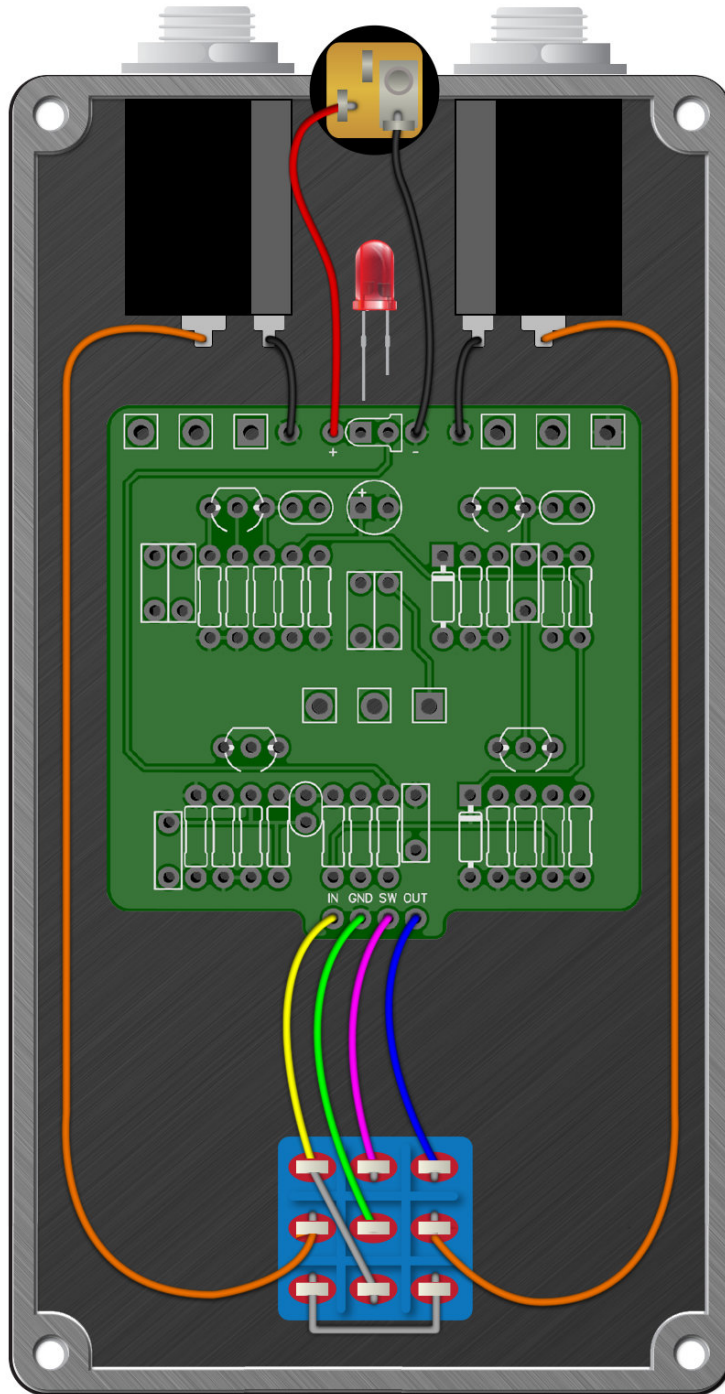

6-Band EQ

Drill Template
125B Enclosure

