


# PedalPCB

## Brown Betty Overdrive


Revised 6/21/25

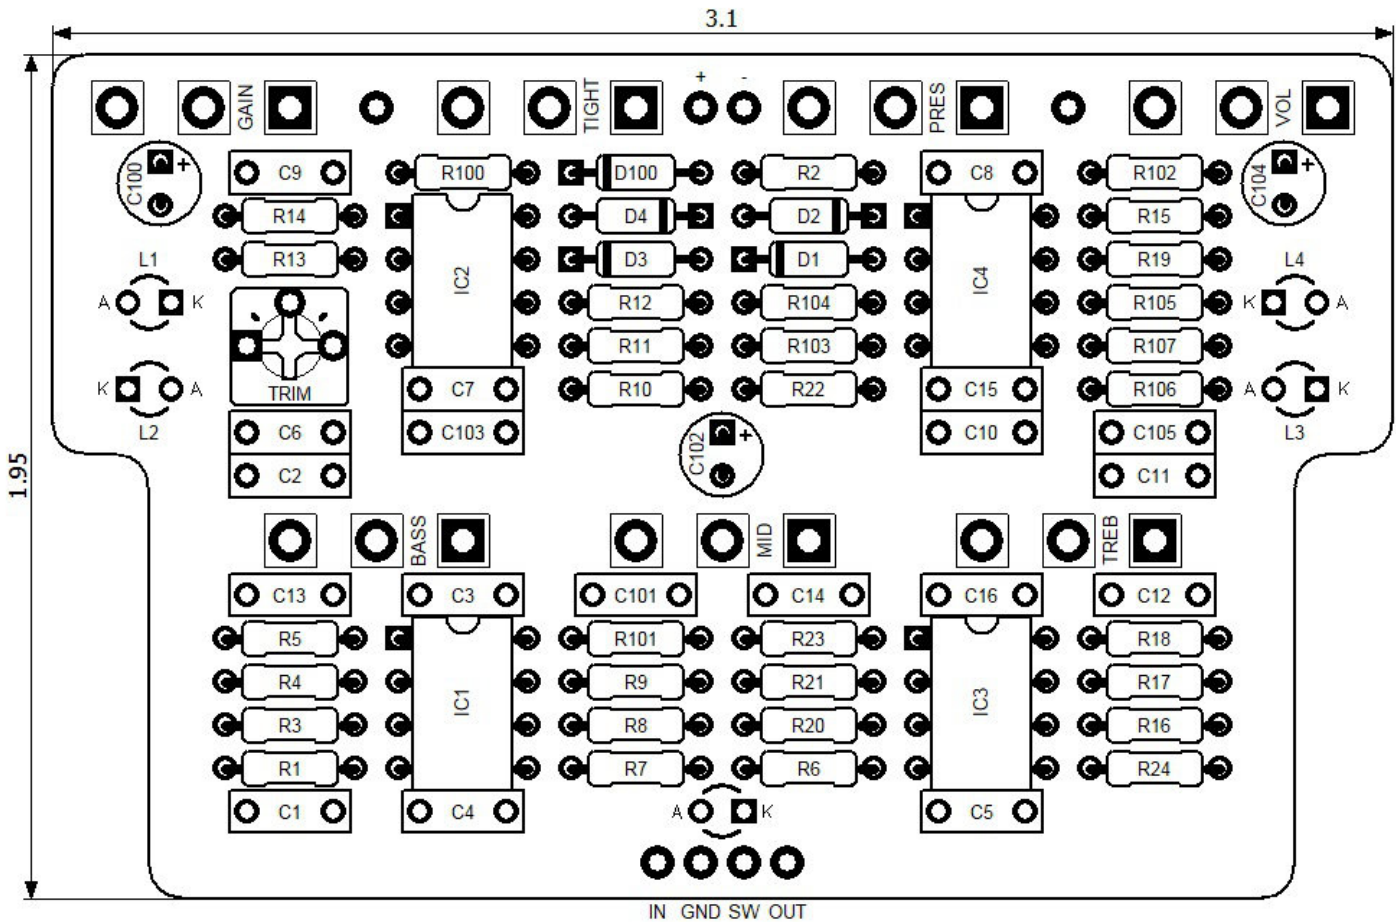

### CONTROLS AND FEATURES

- Volume
- Presence
- Tight
- Gain
- Treble
- Mid
- Bass
- Gain (Internal Trim Pot)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




| LOCATION | VALUE | TYPE                             | NOTES |
|----------|-------|----------------------------------|-------|
| R1       | 1M    | Resistor, 1/4W                   |       |
| R2       | 330K  | Resistor, 1/4W                   |       |
| R3       | 10K   | Resistor, 1/4W                   |       |
| R4       | 22K   | Resistor, 1/4W                   |       |
| R5       | 39K   | Resistor, 1/4W                   |       |
| R6       | 4K7   | Resistor, 1/4W                   |       |
| R7       | 10K   | Resistor, 1/4W                   |       |
| R8       | 22K   | Resistor, 1/4W                   |       |
| R9       | 22K   | Resistor, 1/4W                   |       |
| R10      | 22K   | Resistor, 1/4W                   |       |
| R11      | 22K   | Resistor, 1/4W                   |       |
| R12      | 220K  | Resistor, 1/4W                   |       |
| R13      | 27K   | Resistor, 1/4W                   |       |
| R14      | 10K   | Resistor, 1/4W                   |       |
| R15      | 2K2   | Resistor, 1/4W                   |       |
| R16      | 33K   | Resistor, 1/4W                   |       |
| R17      | 33K   | Resistor, 1/4W                   |       |
| R18      | 2K2   | Resistor, 1/4W                   |       |
| R19      | 470K  | Resistor, 1/4W                   |       |
| R20      | 2K2   | Resistor, 1/4W                   |       |
| R21      | 2K2   | Resistor, 1/4W                   |       |
| R22      | 22K   | Resistor, 1/4W                   |       |
| R23      | 100K  | Resistor, 1/4W                   |       |
| R24      | 3K3   | Resistor, 1/4W                   |       |
| R100     | 10R   | Resistor, 1/4W                   |       |
| R101     | 10K   | Resistor, 1/4W                   |       |
| R102     | 20K   | Resistor, 1/4W                   |       |
| R103     | 22K   | Resistor, 1/4W                   |       |
| R104     | 2K2   | Resistor, 1/4W                   |       |
| R105     | 20K   | Resistor, 1/4W                   |       |
| R106     | 22K   | Resistor, 1/4W                   |       |
| R107     | 2K2   | Resistor, 1/4W                   |       |
|          |       |                                  |       |
| C1       | 22n   | Film capacitor, 7.2 x 2.5mm      |       |
| C2       | 47p   | Ceramic capacitor                |       |
| C3       | 10n   | Film capacitor, 7.2 x 2.5mm      |       |
| C4       | 1n    | Film capacitor, 7.2 x 2.5mm      |       |
| C5       | 100n  | Film capacitor, 7.2 x 2.5mm      |       |
| C6       | 47p   | Ceramic capacitor                |       |
| C7       | 47n   | Film capacitor, 7.2 x 2.5mm      |       |
| C8       | 470p  | Ceramic capacitor                |       |
| C9       | 220p  | Ceramic capacitor                |       |
| C10      | 10n   | Film capacitor, 7.2 x 2.5mm      |       |
| C11      | 4n7   | Film capacitor, 7.2 x 2.5mm      |       |
| C12      | 22n   | Film capacitor, 7.2 x 2.5mm      |       |
| C13      | 220n  | Film capacitor, 7.2 x 2.5mm      |       |
| C14      | 2n2   | Film capacitor, 7.2 x 5.0mm      |       |
|          |       | <i>Continued on next page...</i> |       |






# Brown Betty Overdrive

## Parts List (Page 2 of 2)

[illegible]

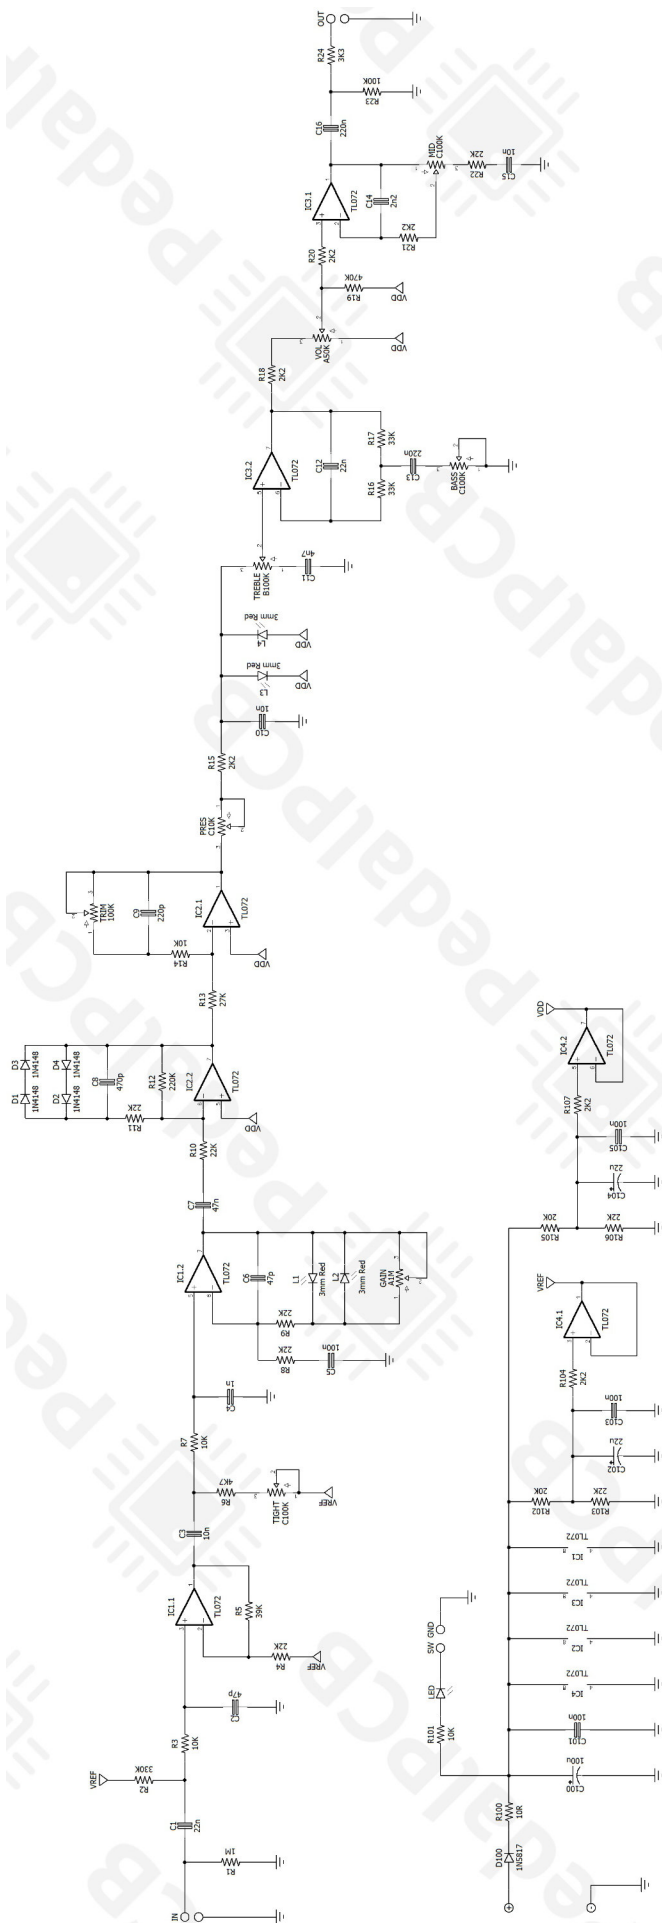

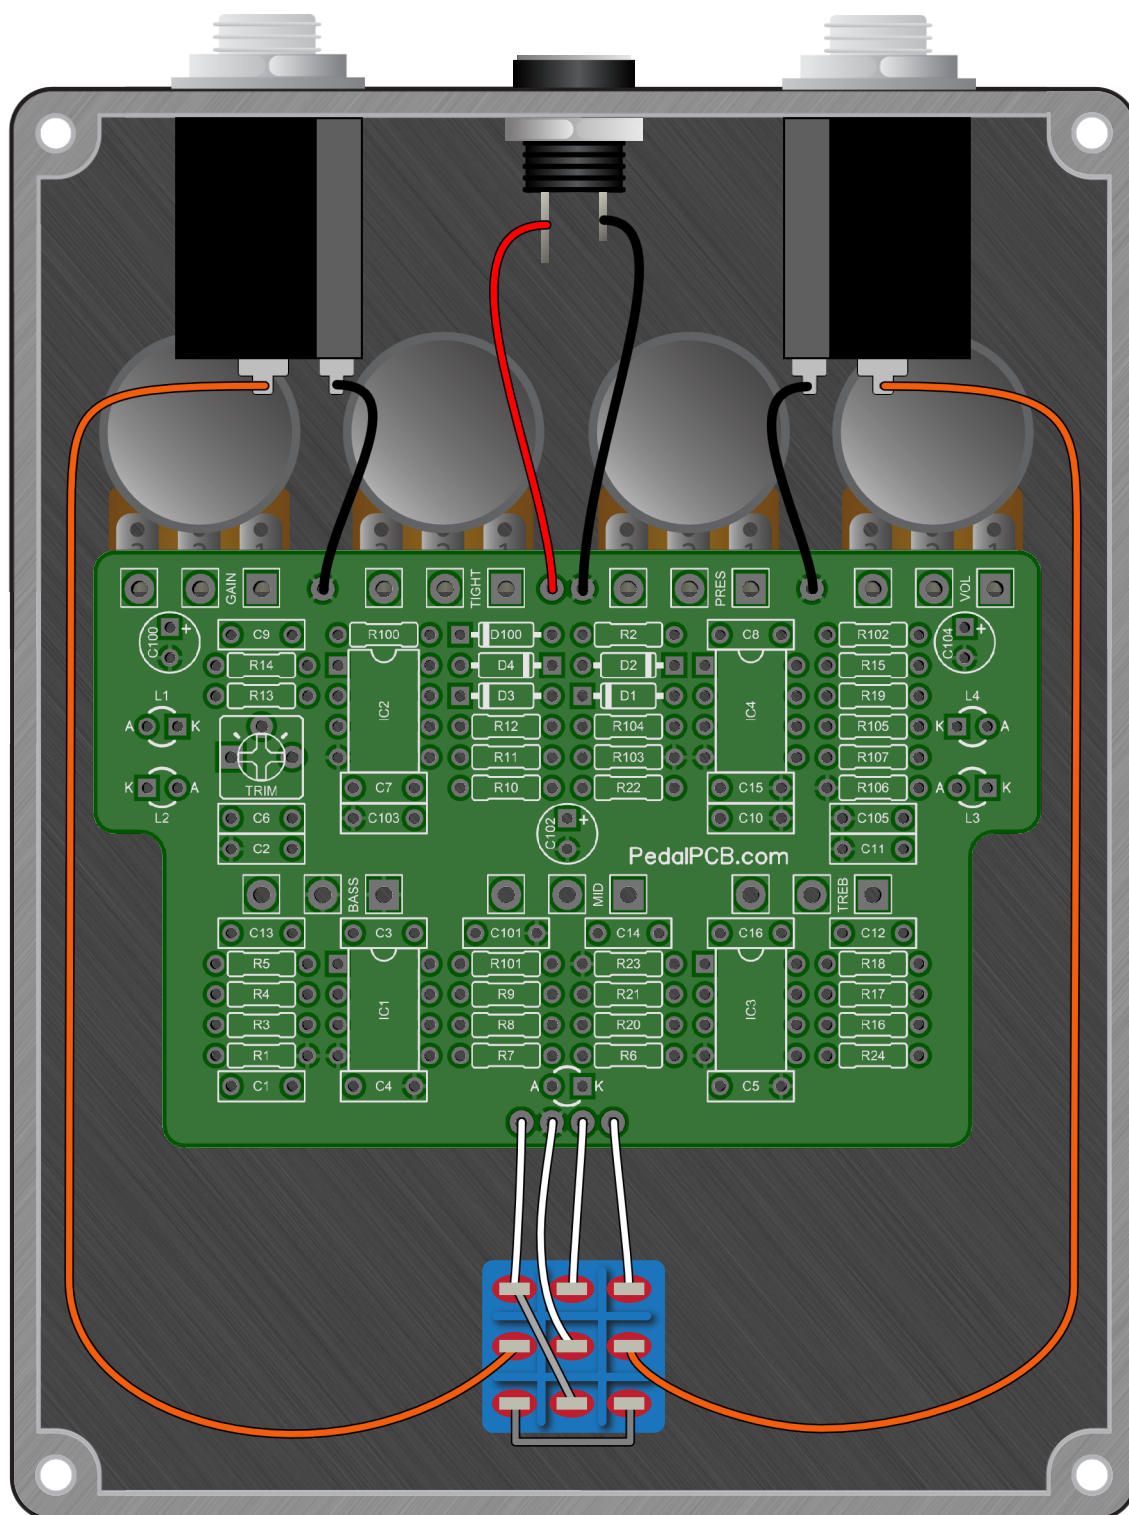



**PedalPCB**

# Brown Betty Overdrive

Drill Template  
1590BB Enclosure

