


PedalPCB

Covert Overdrive


Revised 3/9/21

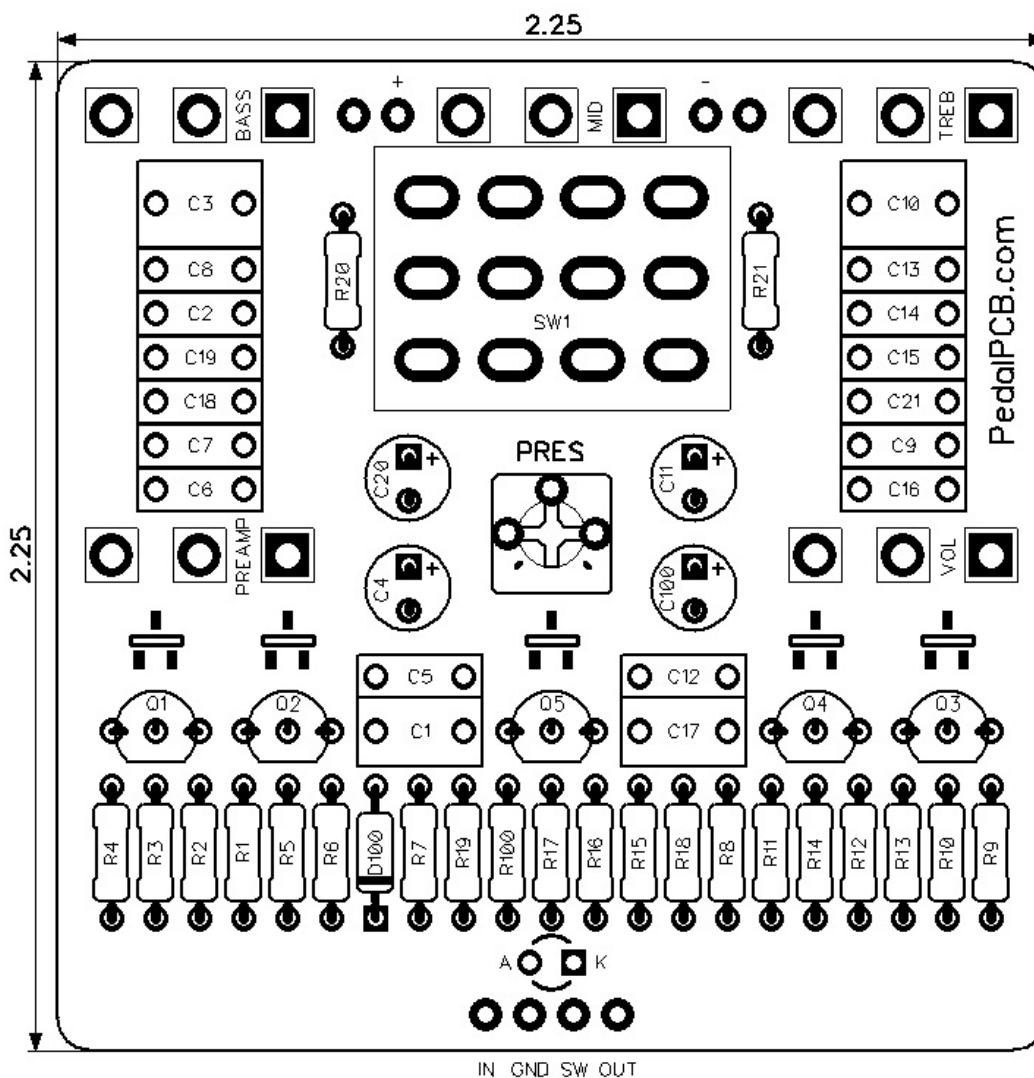

CONTROLS AND FEATURES

- Treble
- Mid
- Bass
- Volume
- Preamp
- Mode (Toggle switch)
- Presence (Internal trim pot)


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



Covert Overdrive

Parts List (Page 1 of 2)

LOCATION	VALUE	TYPE	NOTES
R1	470K	Resistor, 1/4W	
R2	33K	Resistor, 1/4W	
R3	820R	Resistor, 1/4W	
R4	1K	Resistor, 1/4W	
R5	1M	Resistor, 1/4W	
R6	1M	Resistor, 1/4W	
R7	47K	Resistor, 1/4W	
R8	470K	Resistor, 1/4W	
R9	470K	Resistor, 1/4W	
R10	560R	Resistor, 1/4W	
R11	1K	Resistor, 1/4W	
R12	1M	Resistor, 1/4W	
R13	1M	Resistor, 1/4W	
R14	100K	Resistor, 1/4W	
R15	33K	Resistor, 1/4W	
R16	1K	Resistor, 1/4W	
R17	4K7	Resistor, 1/4W	
R18	2M2	Resistor, 1/4W	
R19	2M2	Resistor, 1/4W	
R20	1M	Resistor, 1/4W	
R21	56K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	220n	Film capacitor, 7.2 x 5.0mm	
C2	1n	Film capacitor, 7.2 x 2.5mm	
C3	680n	Film capacitor, 7.2 x 5.0mm	
C4	2u2	Electrolytic capacitor, 5mm	
C5	220p	Ceramic capacitor	
C6	22n	Film capacitor, 7.2 x 2.5mm	
C7	47p	Ceramic capacitor	
C8	470p	Ceramic capacitor	
C9	470p	Ceramic capacitor	
C10	680n	Film capacitor, 7.2 x 5.0mm	
C11	2u2	Electrolytic capacitor, 5mm	
C12	470p	Ceramic capacitor	
C13	470p	Ceramic capacitor	
C14	22n	Film capacitor, 7.2 x 2.5mm	
C15	22n	Film capacitor, 7.2 x 2.5mm	
C16	22n	Film capacitor, 7.2 x 2.5mm	
C17	220n	Film capacitor, 7.2 x 5.0mm	
C18	100n	Film capacitor, 7.2 x 2.5mm	
C19	2n2	Film capacitor, 7.2 x 2.5mm	
C20	22u	Electrolytic capacitor, 5mm	
C21	270p	Ceramic capacitor	
C100	22u	Electrolytic capacitor, 5mm	
		- Continued on next page -	



Covert Overdrive


Parts List (Page 2 of 2)

[illegible]



Schematic Diagram



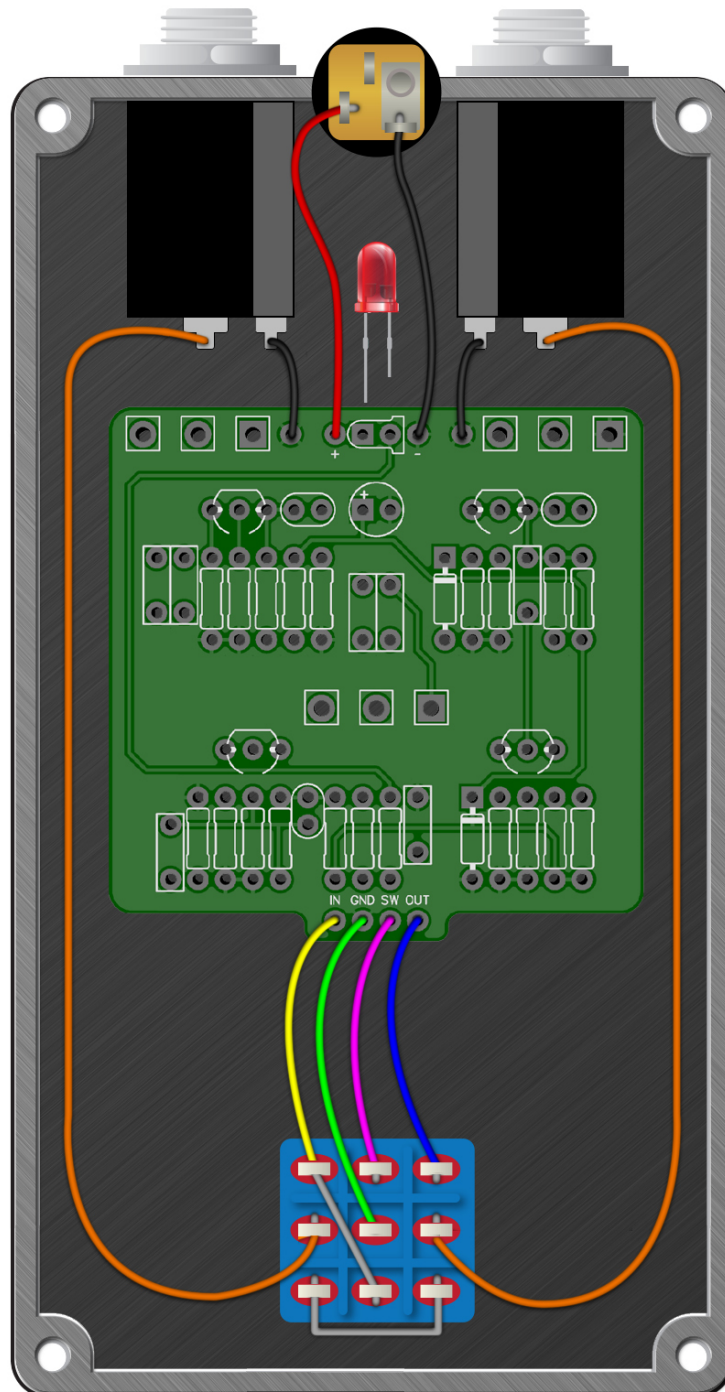

Covert Overdrive

Drill Template
125B Enclosure

