




Depot Fuzz

Revised 5/16/21

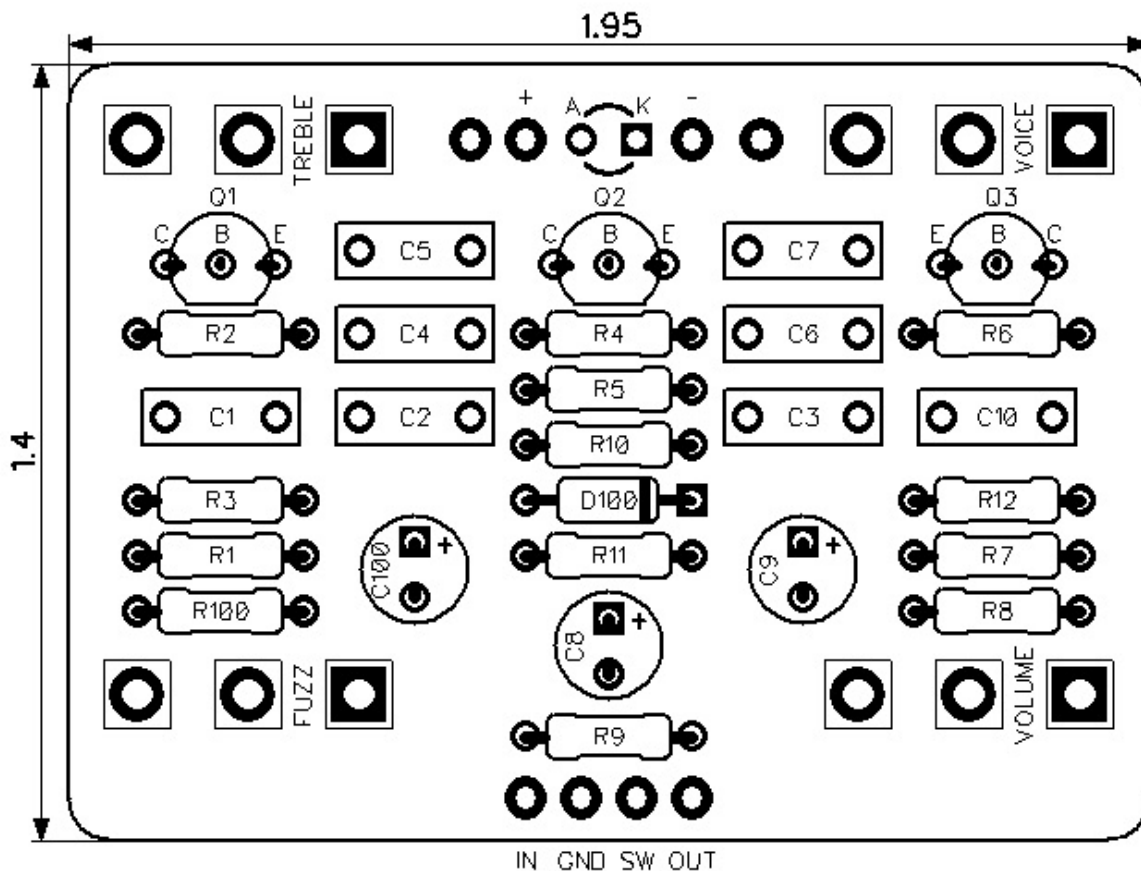

CONTROLS AND FEATURES

- Voice
- Treble
- Volume
- Fuzz

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	2M2	Resistor, 1/4W	
R3	22K	Resistor, 1/4W	
R4	1M	Resistor, 1/4W	
R5	47K	Resistor, 1/4W	
R6	10K	Resistor, 1/4W	
R7	15K	Resistor, 1/4W	
R8	10K	Resistor, 1/4W	
R9	100K	Resistor, 1/4W	
R10	470K	Resistor, 1/4W	
R11	47K	Resistor, 1/4W	
R12	470R	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	1n	Film capacitor, 7.2 x 2.5mm	
C3	4n7	Film capacitor, 7.2 x 2.5mm	
C4	2n2	Film capacitor, 7.2 x 2.5mm	
C5	3n3	Film capacitor, 7.2 x 2.5mm	
C6	1n	Film capacitor, 7.2 x 2.5mm	
C7	100n	Film capacitor, 7.2 x 2.5mm	
C8	10u	Electrolytic capacitor, 5mm	
C9	10u	Electrolytic capacitor, 5mm	
C10	100n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	P2N2222A	BJT transistor, NPN TO-18	
Q2	P2N2222A	BJT transistor, NPN TO-18	
Q3	2N3904	BJT transistor, NPN TO-18	
TREBLE	B50K	16mm right-angle PCB mount pot	
VOICE	B10K	16mm right-angle PCB mount pot	
VOLUME	B50K	16mm right-angle PCB mount pot	
FUZZ	B250K	16mm right-angle PCB mount pot	

