


PedalPCB

FET City Drive

Revised 12/16/23

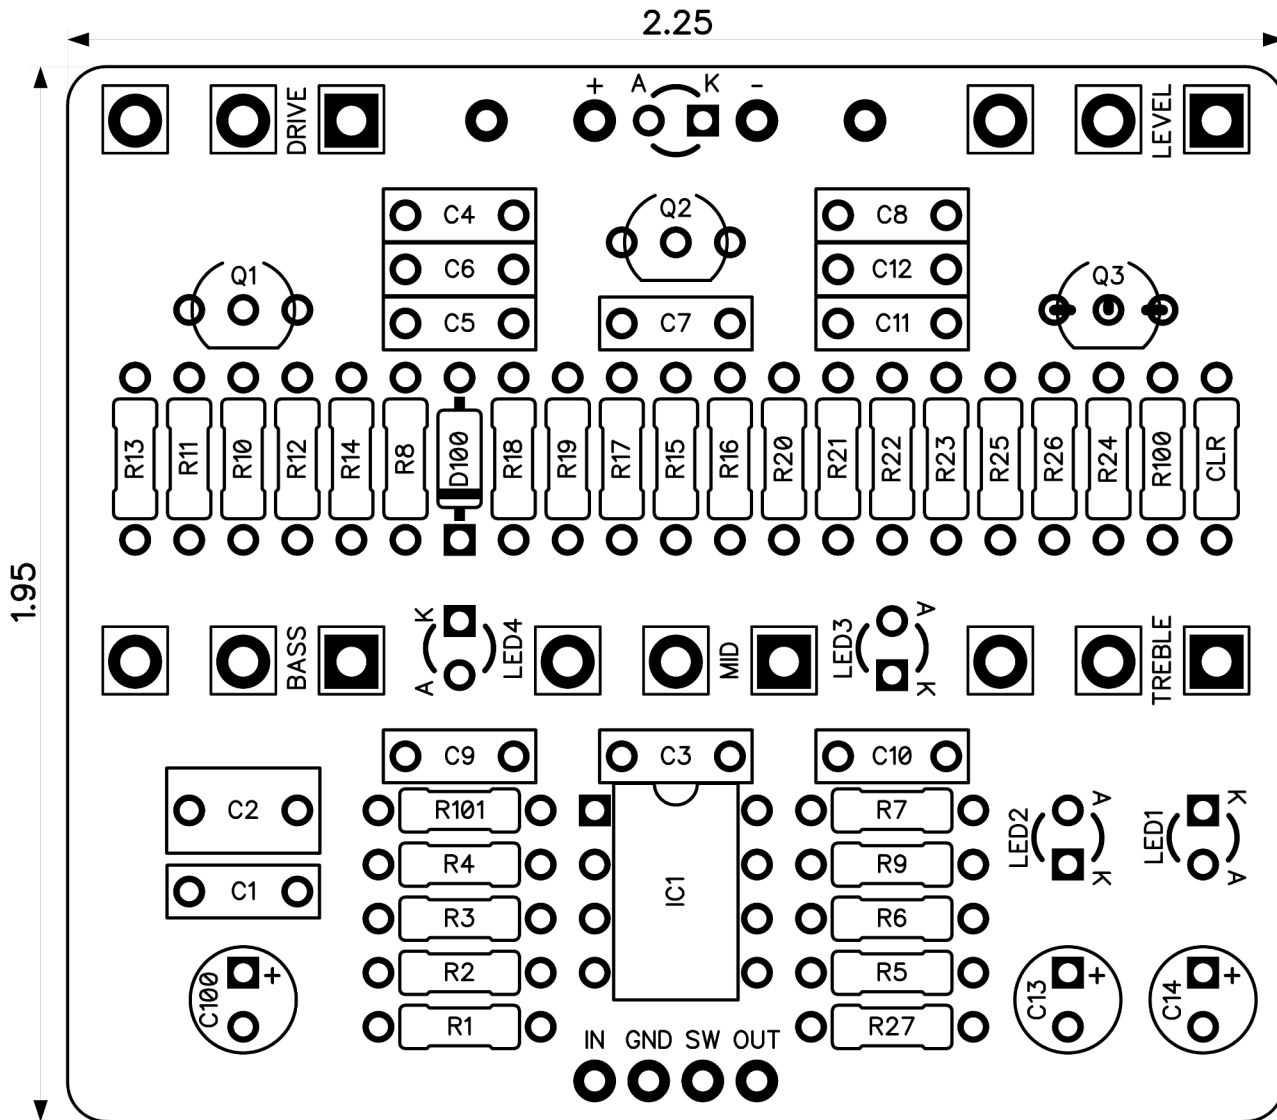

CONTROLS AND FEATURES

- Level
- Drive
- Treble
- Mid
- Bass

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



FET City Drive

Parts List (Page 1 of 2)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	10K	Resistor, 1/4W	
R3	1M	Resistor, 1/4W	
R4	1K5	Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	4K7	Resistor, 1/4W	
R7	15K	Resistor, 1/4W	
R8	1K5	Resistor, 1/4W	
R9	15K	Resistor, 1/4W	
R10	10K	Resistor, 1/4W	
R11	1M	Resistor, 1/4W	
R12	1M	Resistor, 1/4W	
R13	5K1	Resistor, 1/4W	
R14	100R	Resistor, 1/4W	
R15	15K	Resistor, 1/4W	
R16	1K	Resistor, 1/4W	
R17	1M	Resistor, 1/4W	
R18	1M	Resistor, 1/4W	
R19	5K1	Resistor, 1/4W	
R20	100R	Resistor, 1/4W	
R21	10K	Resistor, 1/4W	
R22	1K8	Resistor, 1/4W	
R23	150K	Resistor, 1/4W	
R24	470K	Resistor, 1/4W	
R25	10K	Resistor, 1/4W	
R26	470R	Resistor, 1/4W	
R27	82K	Resistor, 1/4W	
R100	10K	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	* LED current limiting resistor
C1	33n	Film capacitor, 7.2 x 2.5mm	
C2	470n	Film capacitor, 7.2 x 5.0mm	
C3	47n	Film capacitor, 7.2 x 2.5mm	
C4	120p	Ceramic capacitor	
C5	47n	Film capacitor, 7.2 x 2.5mm	
C6	47n	Film capacitor, 7.2 x 2.5mm	
C7	100n	Film capacitor, 7.2 x 2.5mm	
C8	680p	Ceramic capacitor	
C9	22n	Film capacitor, 7.2 x 2.5mm	
C10	47n	Film capacitor, 7.2 x 2.5mm	
C11	3n3	Film capacitor, 7.2 x 2.5mm	
C12	10n	Film capacitor, 7.2 x 2.5mm	
C13	10u	Electrolytic capacitor, 5mm	
C14	100u	Electrolytic capacitor, 5mm	
C100	47u	Electrolytic capacitor, 5mm	
		Continued on next page...	




FET City Drive


Parts List (Page 2 of 2)

[illegible]

FET City Drive

Schematic Diagram

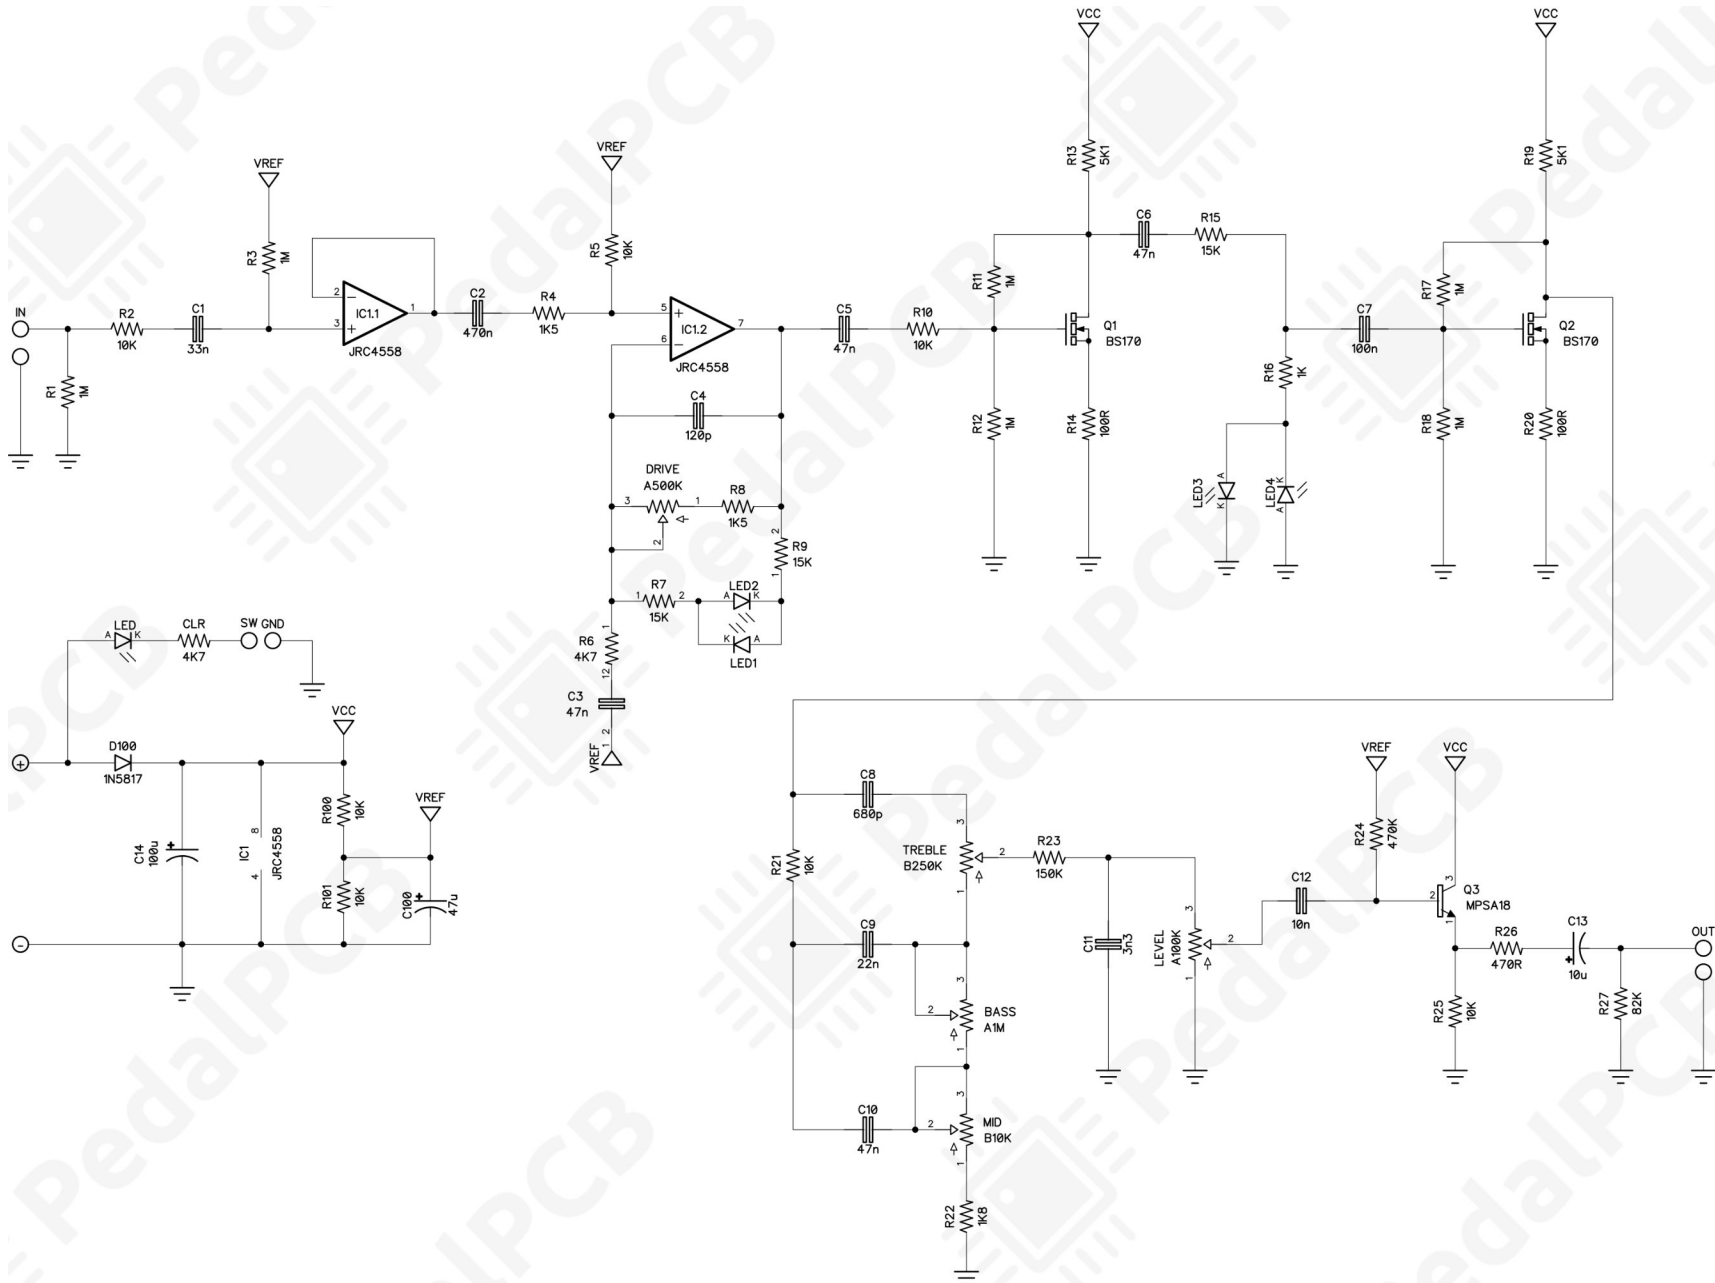

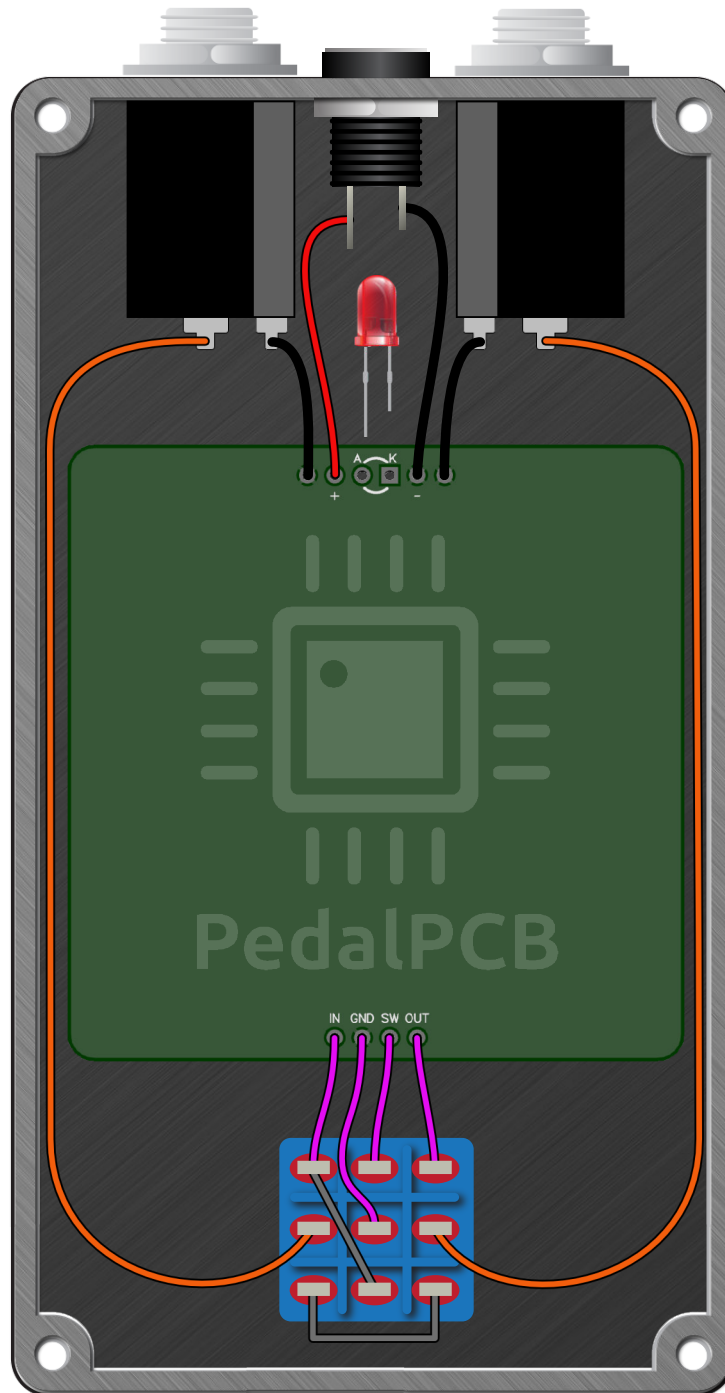

FET City Drive

Drill Template
125B Enclosure

