


Hatchet Overdrive

Revised 4/7/21

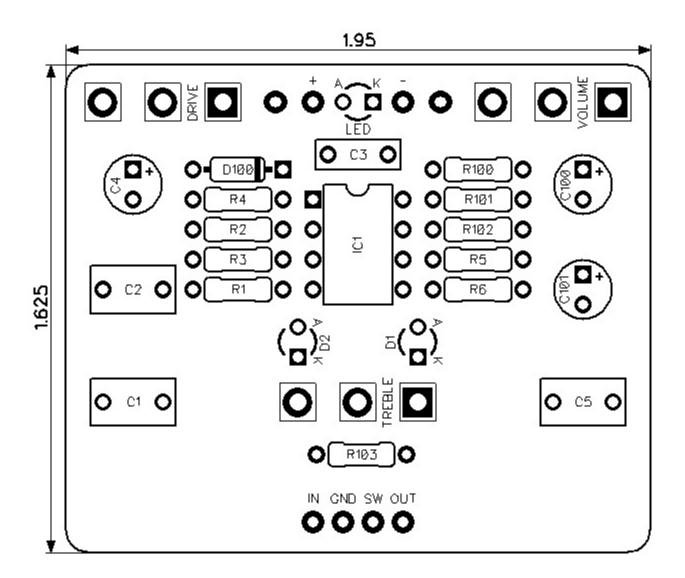

CONTROLS AND FEATURES


- Volume
- Treble
- Drive

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



Parts List (Page 1 of 1)


LOCATION	VALUE	ТҮРЕ	NOTES
R1	1M	Resistor, 1/4W	
R2	6K8	Resistor, 1/4W	
R3	330K	Resistor, 1/4W	
R4	47K	Resistor, 1/4W	
R5	8K2	Resistor, 1/4W	
R6	1M	Resistor, 1/4W	
R100	47R	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
R102	10K	Resistor, 1/4W	
	4K7		
R103	4N/	Resistor, 1/4W	
C1	100n	Film capacitor, 7.2 x 2.5mm	
	47n	Film capacitor, 7.2 x 2.5mm	
C2			
C1 C2 C3 C4 C5	100p	Ceramic capacitor	
04 05	10u	Electrolytic capacitor, 5mm	
	47n	Film capacitor, 7.2 x 2.5mm	
C100	22u	Electrolytic capacitor, 5mm	
C101	22u	Electrolytic capacitor, 5mm	
.			
D1	3mm Red	3mm Red LED, Diffused	
D2	3mm Red	3mm Red LED, Diffused	
D100	1N5817	Schottky diode, DO-41	
IC1	TL072	Dual op-amp, DIP8	
VOLUME	A250K	16mm right-angle PCB mount pot	
TREBLE	A50K	16mm right-angle PCB mount pot	
DRIVE	A1M	16mm right-angle PCB mount pot	

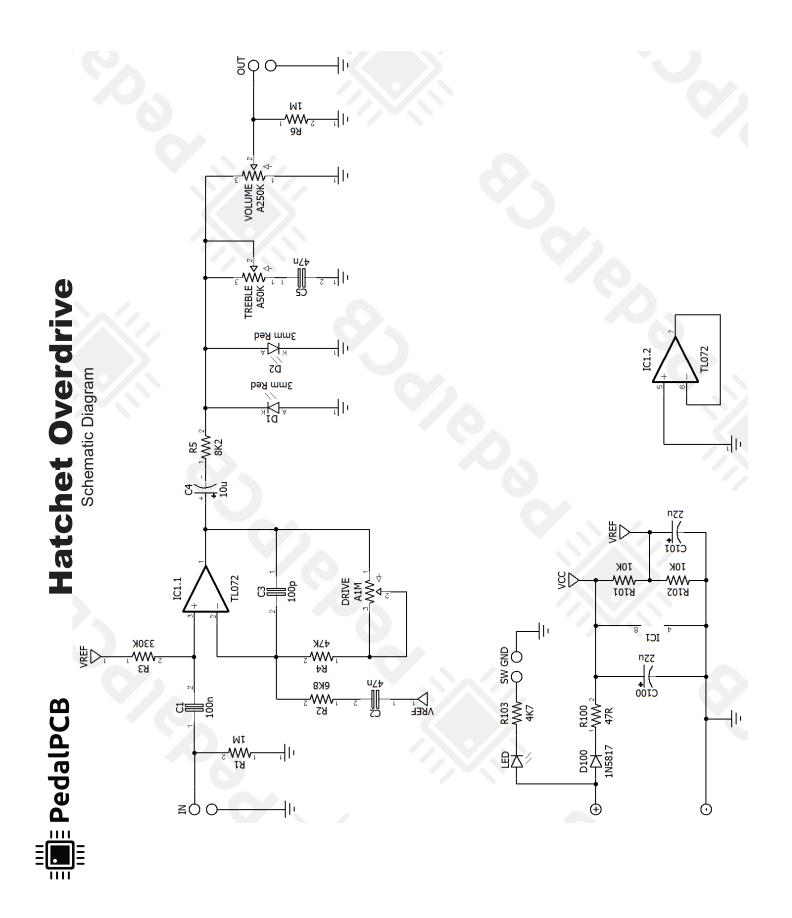



PedalPCB Hatchet Overdrive

Wiring Diagram

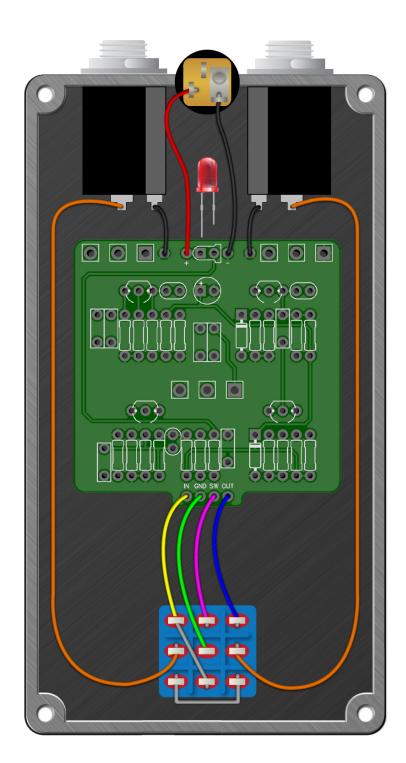



PedalPCB Hatchet Overdrive

Drill Template 125B Enclosure

