




# PedalPCB

## Mantle Fuzz

Revision 08.31.19

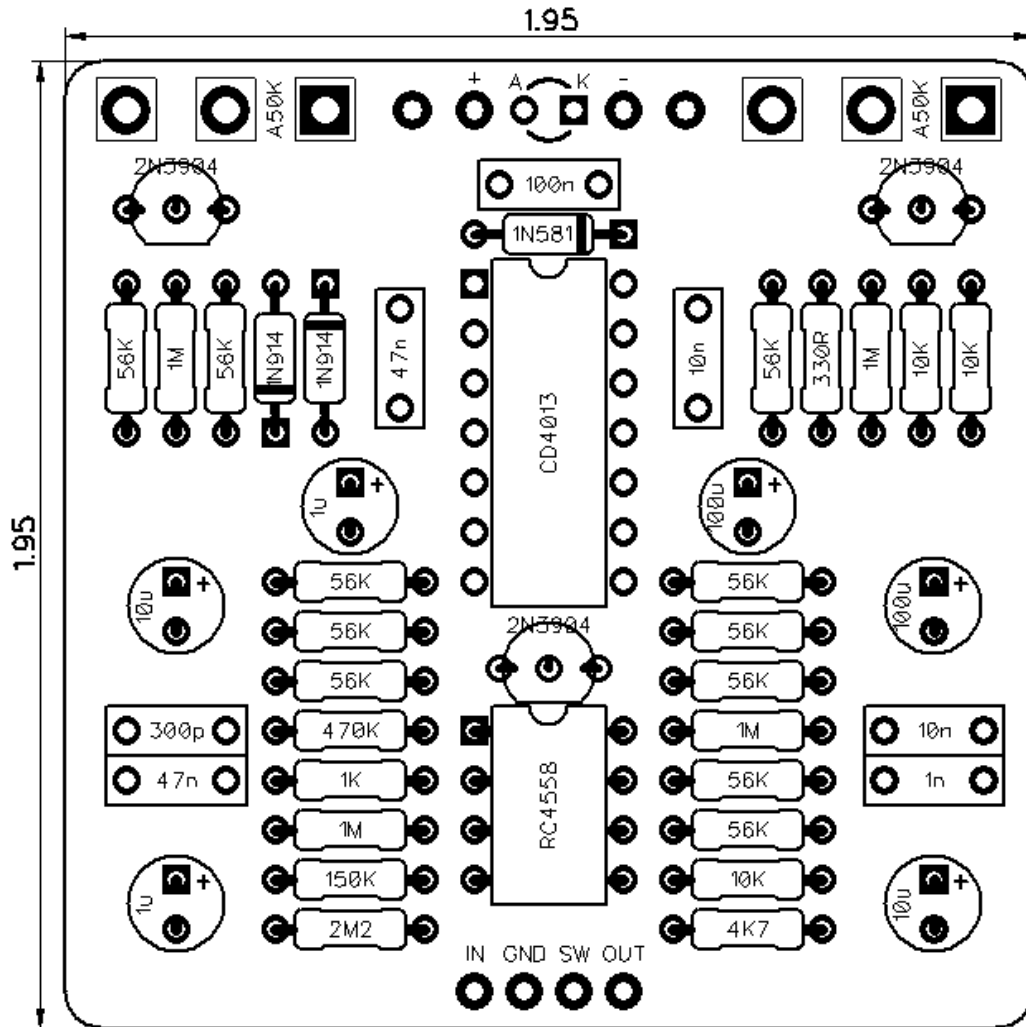

### Controls

- Blend
- Output

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

**RESISTORS (1/4W)**

R1 2M2  
R2 150K  
R3 1M  
R4 470K  
R5 1K  
R6 56K  
R7 1M  
R8 10K  
R9 56K  
R10 10K  
R11 10K  
R12 1M  
R13 56K  
R14 56K  
R15 56K  
R16 56K  
R17 56K  
R18 56K  
R19 56K  
R20 1M  
R100 4K7  
R101 56K  
R102 56K  
R103 330R

**CAPACITORS**

C1 10n  
C2 1n  
C3 300p  
C4 10u  
C5 47n  
C6 1u  
C7 1u  
C8 47n  
C9 10n  
C100 100u  
C101 10u  
C102 100u  
C103 100n

**INTEGRATED CIRCUITS**

IC1 RC4558  
IC2 CD4013

**TRANSISTORS**

Q1 2N3904  
Q2 2N3904  
Q3 2N3904



**DIODES**

D1 1N914  
D2 1N914  
D100 1N5817

**POTENTIOMETERS**

BLEND A50K  
OUTPUT A50K

# Mantle Fuzz

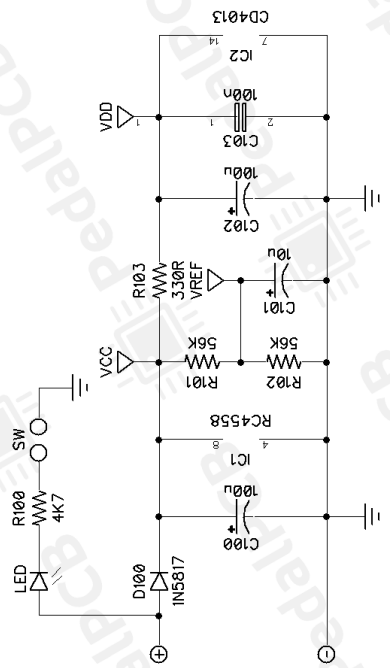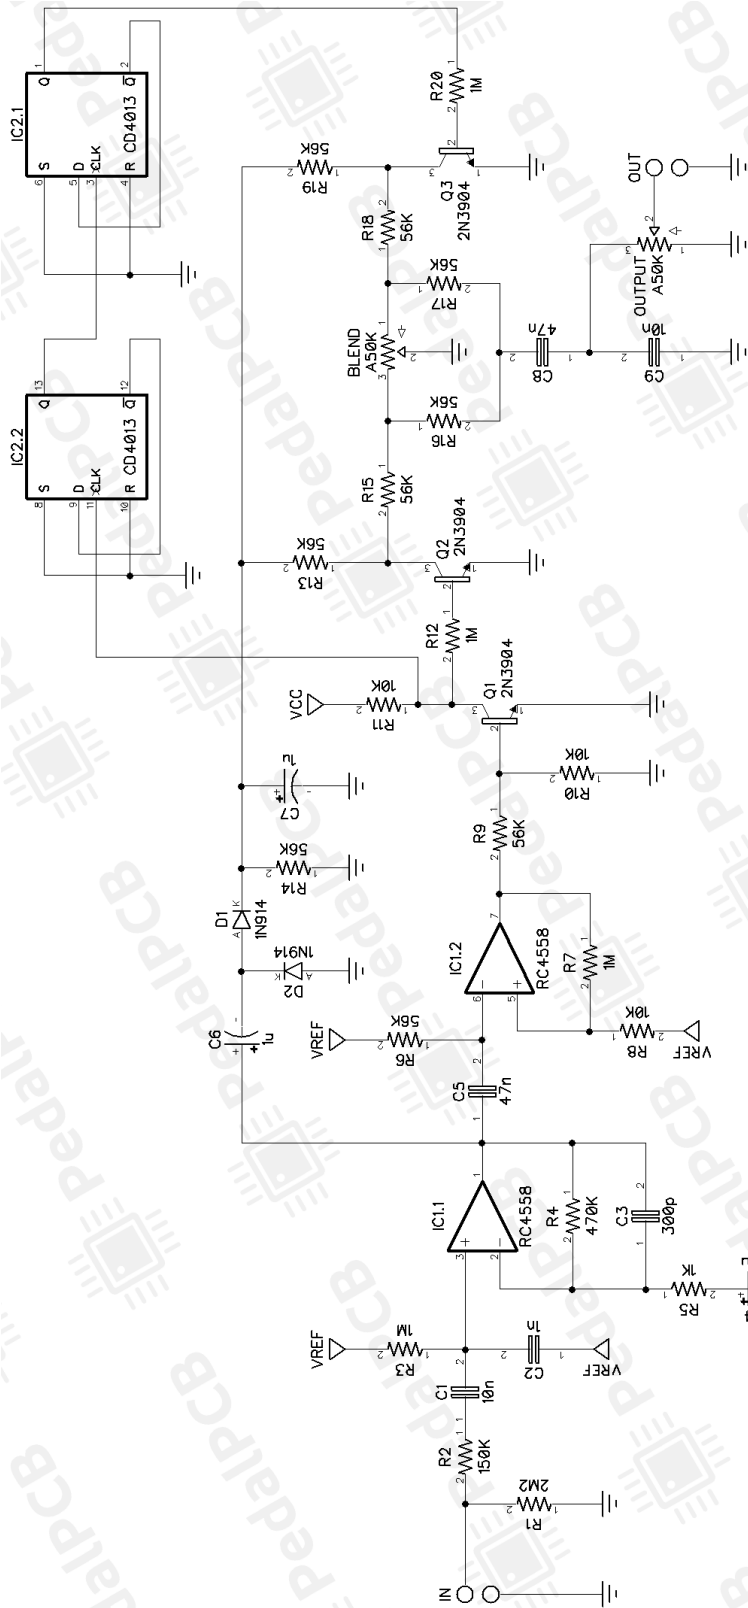

# Mantle Fuzz

Wiring Diagram



# Mantle Fuzz

Drill Template  
125B enclosure with top mounted jacks

