


Revised 8/7/21

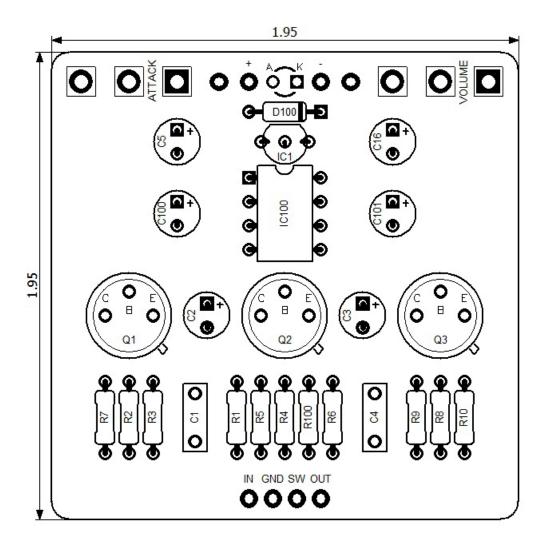

CONTROLS AND FEATURES

- Volume
- Attack

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Mister Fuzz


Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	100K	Resistor, 1/4W	
R2	1M	Resistor, 1/4W	
R3	10K	Resistor, 1/4W	
R4	22K	Resistor, 1/4W	
R5	2K2	Resistor, 1/4W	
R6	470K	Resistor, 1/4W	
R7	1K5	Resistor, 1/4W	
R8	10K	Resistor, 1/4W	
R9	10K	Resistor, 1/4W	
R10	56K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
		,	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C2	22u	Electrolytic capacitor, 5mm	
C3	22u	Electrolytic capacitor, 5mm	
C3 C4	3n3	Film capacitor, 7.2 x 2.5mm	
C5	10u	Electrolytic capacitor, 5mm	
C16	10u	Electrolytic capacitor, 5mm	
C100	10u	Electrolytic capacitor, 5mm	
C101	10u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
		<u> </u>	
Q1	2N270	Germanium transistor, PNP	
Q2	2N270	Germanium transistor, PNP	
Q3	2N270	Germanium transistor, PNP	
		,	
IC1	L78L33	Voltage regulator, +3.3V	
IC100	TC1044SCPA	Charge pump IC, DIP8	
VOLUME	C500K	16mm right-angle PCB mount pot	
ATTACK	A50K	16mm right-angle PCB mount pot	

Mister Fuzz Schematic Diagram



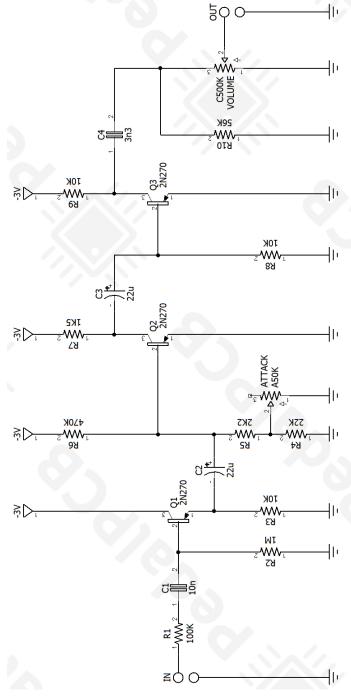


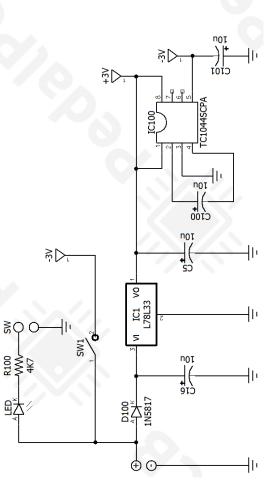



Mister Fuzz

Wiring Diagram

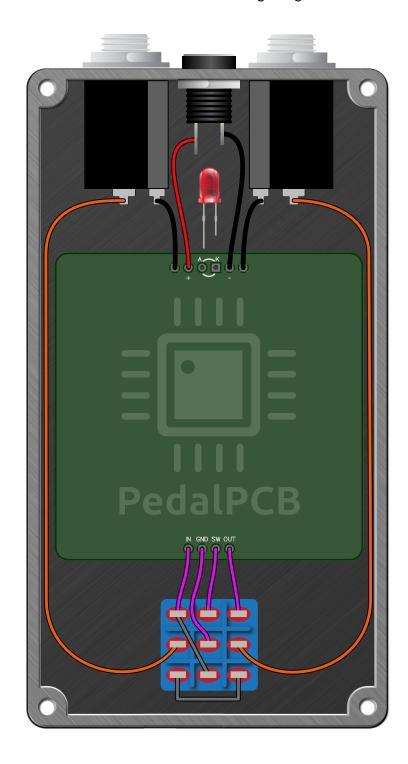



Mister Fuzz

Drill Template

125B Enclosure

