


PedalPCB

Drive '55 Overdrive

Revised 4/7/21

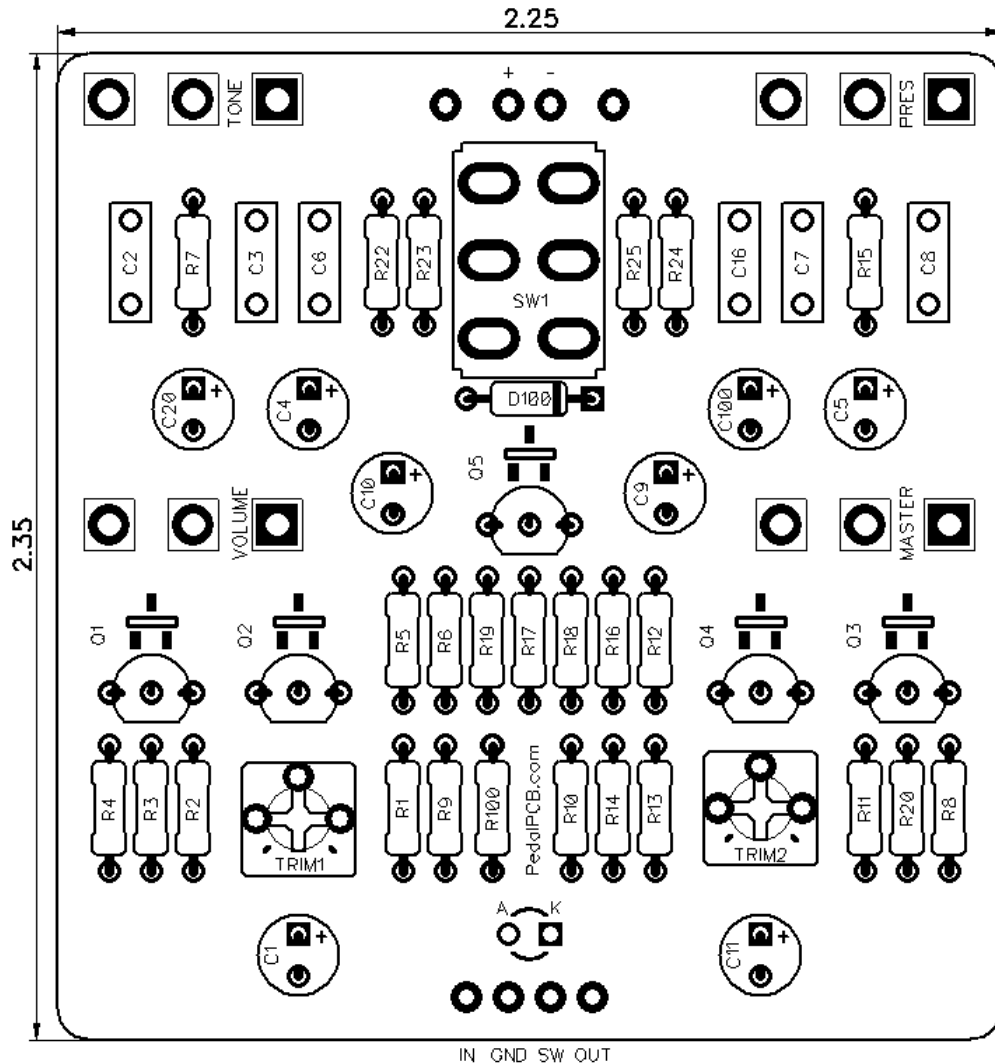

CONTROLS AND FEATURES

- Presence
- Tone
- Master
- Volume
- Gain (Toggle Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.


LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	33K	Resistor, 1/4W	
R3	15K	Resistor, 1/4W	
R4	1K	Resistor, 1/4W	
R5	1M	Resistor, 1/4W	
R6	1M	Resistor, 1/4W	
R7	1M	Resistor, 1/4W	
R8	68K	Resistor, 1/4W	
R9	1M	Resistor, 1/4W	
R10	15K	Resistor, 1/4W	
R11	1K	Resistor, 1/4W	
R12	1M	Resistor, 1/4W	
R13	1M	Resistor, 1/4W	
R14	100R	Resistor, 1/4W	
R15	100R	Resistor, 1/4W	
R16	10K	Resistor, 1/4W	
R17	5K6	Resistor, 1/4W	
R18	1M	Resistor, 1/4W	
R19	10K	Resistor, 1/4W	
R20	10K	Resistor, 1/4W	
R22	56K	Resistor, 1/4W	
R23	4K7	Resistor, 1/4W	
R24	5K1	Resistor, 1/4W	
R25	3K9	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	1u	Electrolytic capacitor, 5mm	
C2	470p	Ceramic capacitor	
C3	4n7	Film capacitor, 7.2 x 2.5mm	
C4	2u2	Electrolytic capacitor, 5mm	
C5	22u	Electrolytic capacitor, 5mm	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	22n	Film capacitor, 7.2 x 2.5mm	
C8	3n3	Film capacitor, 7.2 x 2.5mm	
C9	2u2	Electrolytic capacitor, 5mm	
C10	22u	Electrolytic capacitor, 5mm	
C11	1u	Electrolytic capacitor, 5mm	
C16	100n	Film capacitor, 7.2 x 2.5mm	
C20	22u	Electrolytic capacitor, 5mm	
C100	47u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	MPF4393	JFET transistor, N-channel	*Alternate MMBF4393 (SMD)
Q2	MPF4393	JFET transistor, N-channel	*Alternate MMBF4393 (SMD)
Q3	MPF4393	JFET transistor, N-channel	*Alternate MMBF4393 (SMD)
Q4	MPF4393	JFET transistor, N-channel	*Alternate MMBF4393 (SMD)
Q5	MPF4393	JFET transistor, N-channel	*Alternate MMBF4393 (SMD)




Drive '55 Overdrive

Parts List (Page 2 of 2)

[illegible]

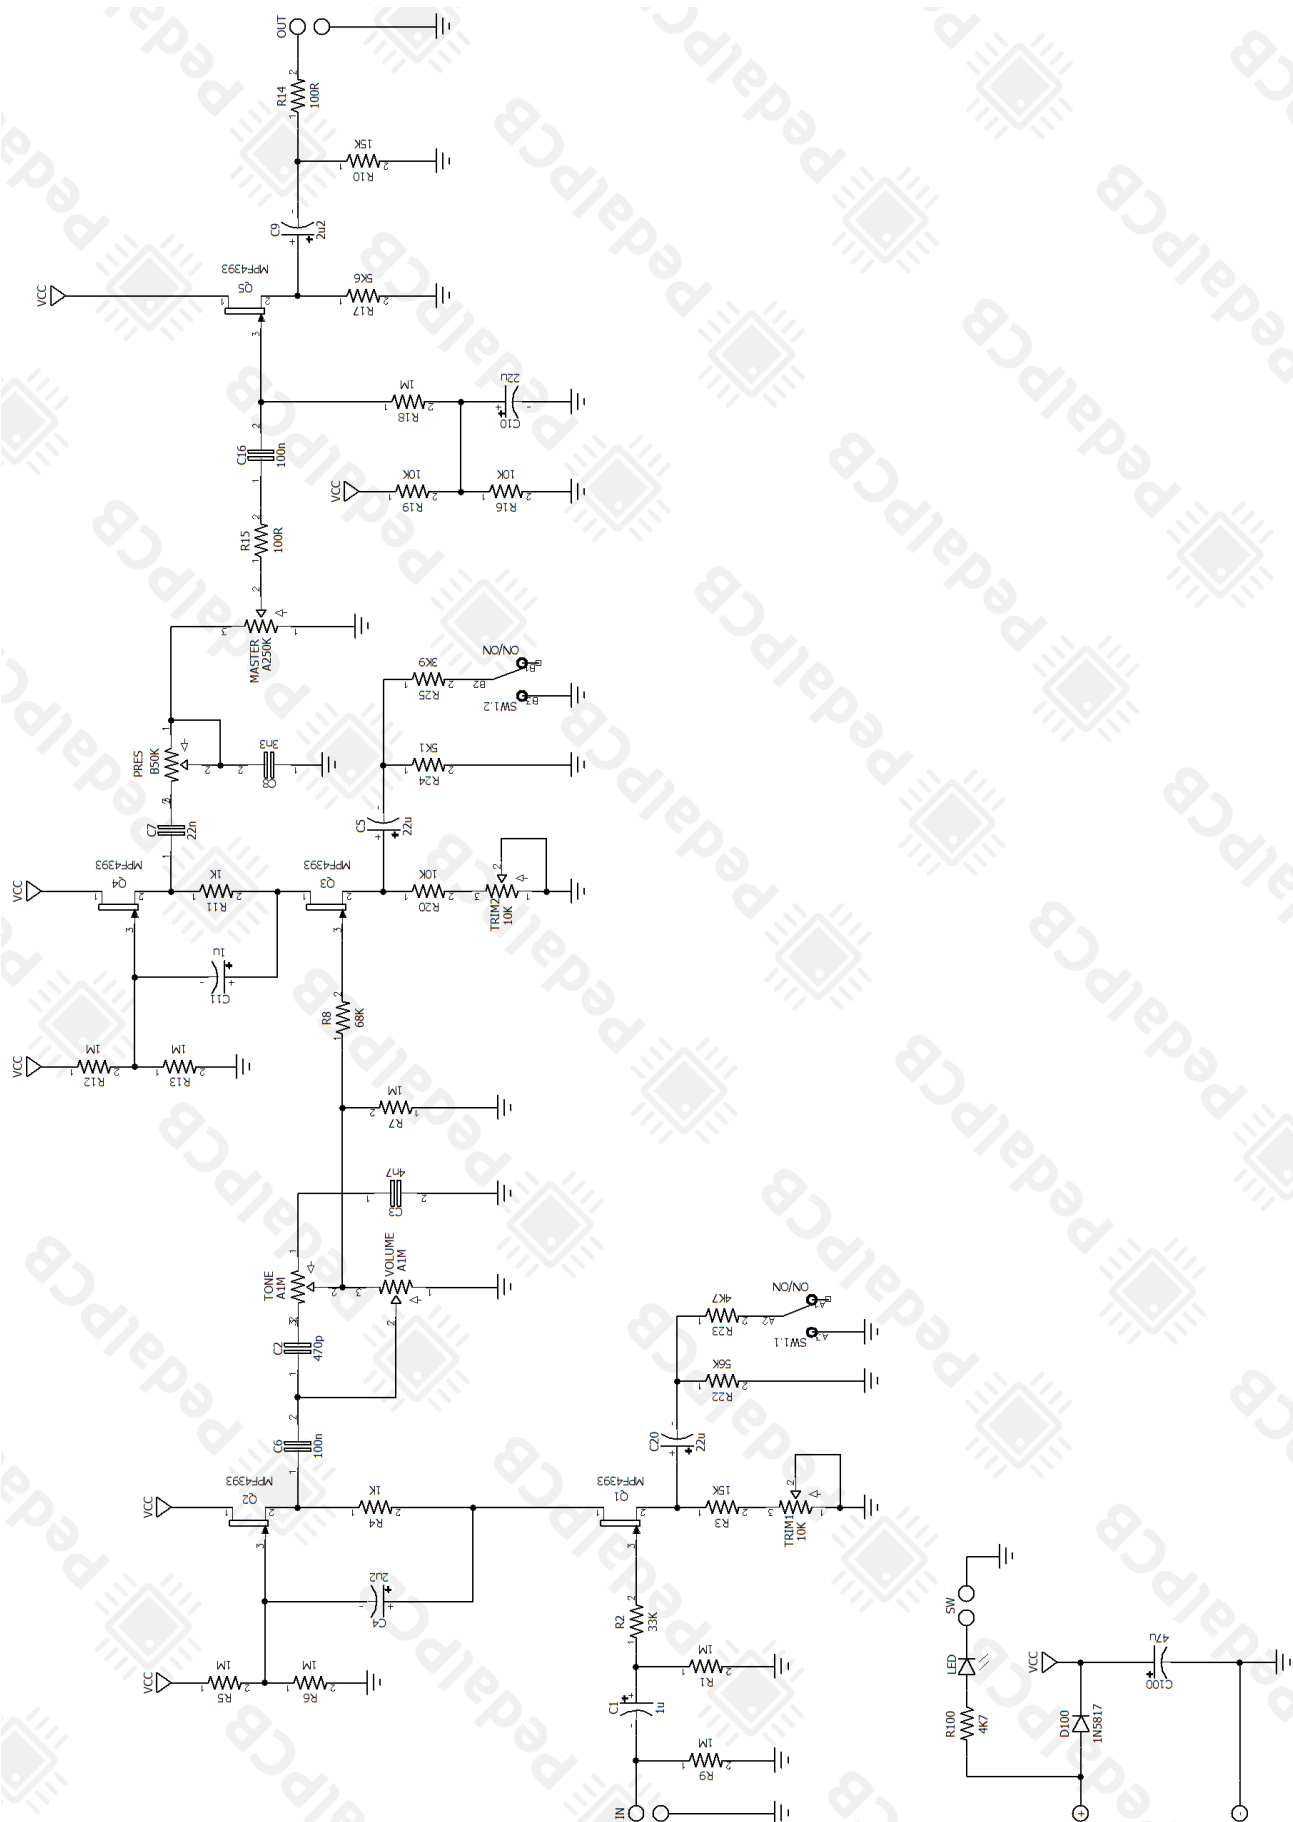

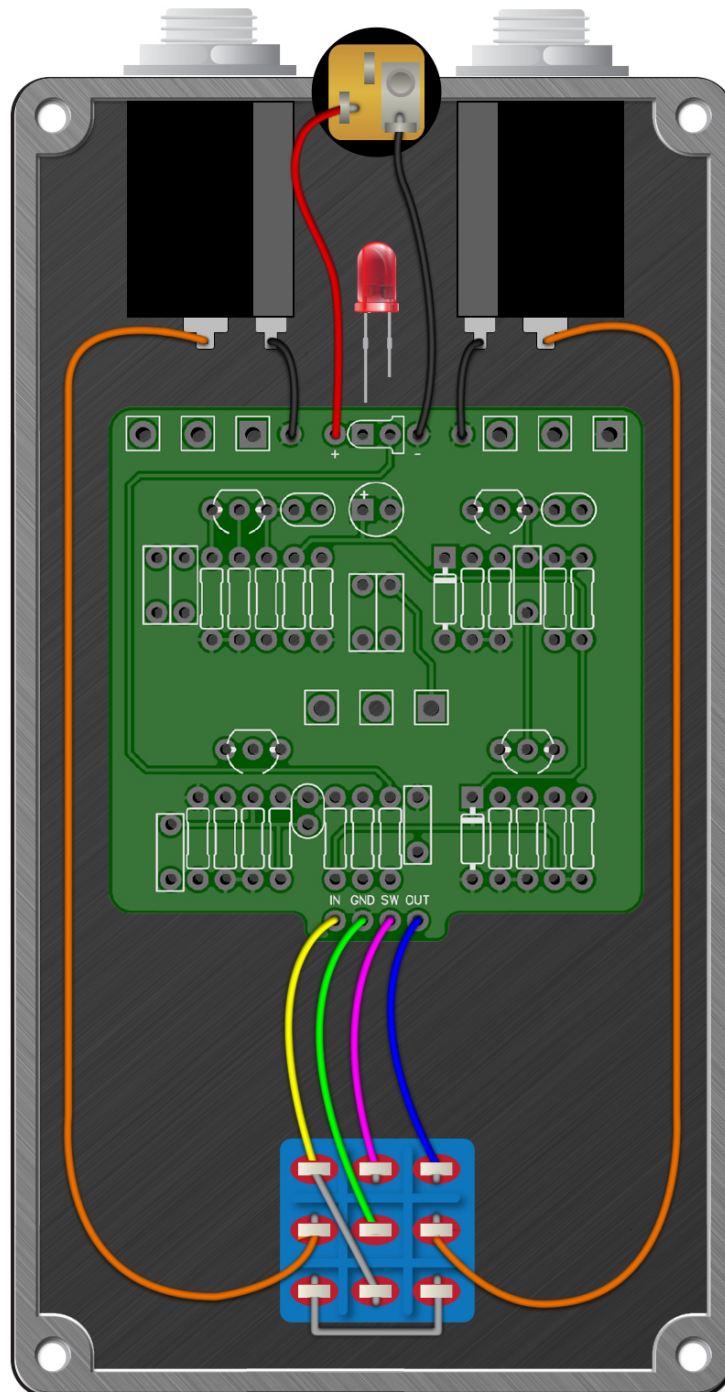

Drive '55 Overdrive

Drill Template
125B enclosure

