




Pro-10 Blue Overdrive


Revised 4/9/21

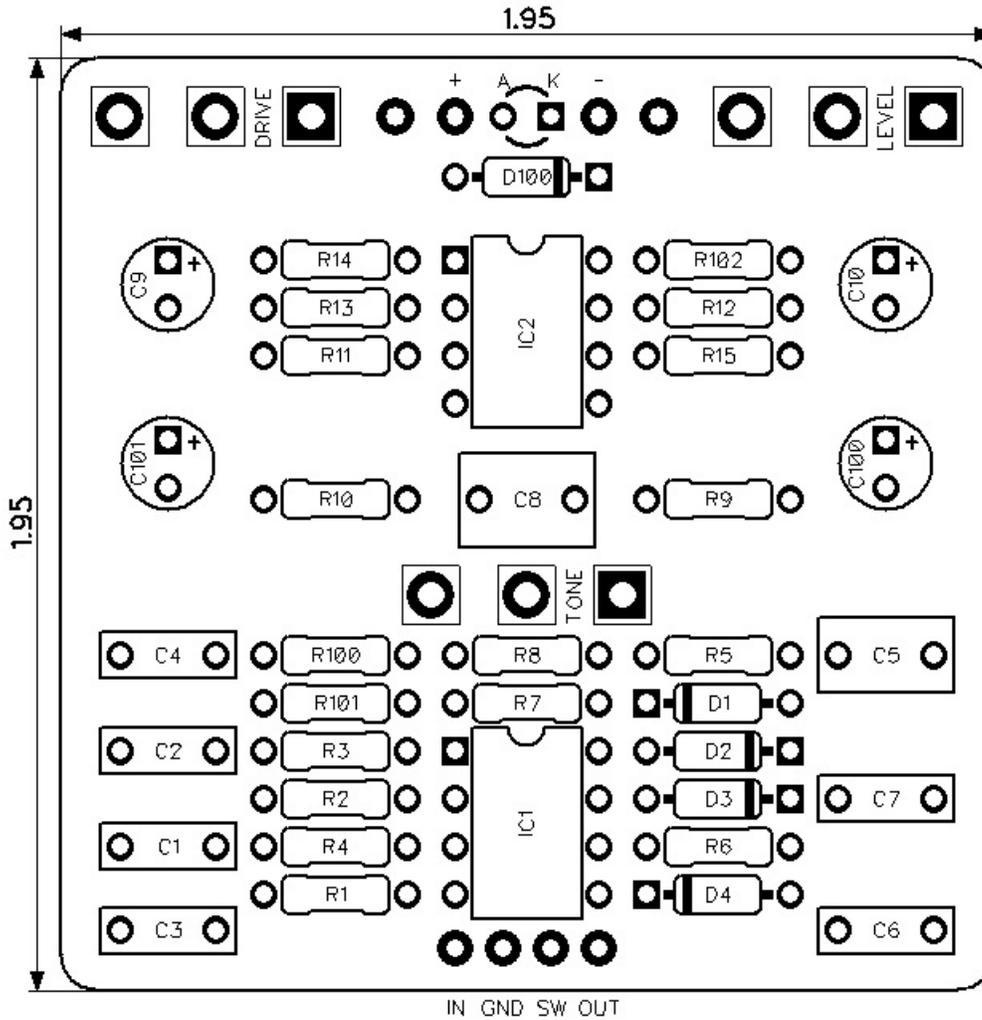


CONTROLS AND FEATURES

- Level
- Tone
- Drive

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



LOCATION	VALUE	TYPE	NOTES
R1	2M2	Resistor, 1/4W	
R2	4K7	Resistor, 1/4W	
R3	3K3	Resistor, 1/4W	
R4	1M	Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	6K8	Resistor, 1/4W	
R7	220K	Resistor, 1/4W	
R8	1K	Resistor, 1/4W	
R9	6K8	Resistor, 1/4W	
R10	100K	Resistor, 1/4W	
R11	10K	Resistor, 1/4W	
R12	1M	Resistor, 1/4W	
R13	1M	Resistor, 1/4W	
R14	2K4	Resistor, 1/4W	
R15	6K8	Resistor, 1/4W	
R100	47K	Resistor, 1/4W	
R101	47K	Resistor, 1/4W	
R102	4K7	Resistor, 1/4W	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C2	10n	Film capacitor, 7.2 x 2.5mm	
C3	47n	Film capacitor, 7.2 x 2.5mm	
C4	56p	Ceramic capacitor	
C5	220n	Film capacitor, 7.2 x 5.0mm	
C6	10n	Film capacitor, 7.2 x 2.5mm	
C7	10n	Film capacitor, 7.2 x 2.5mm	
C8	1u	Film capacitor, 7.2 x 5.0mm	
C9	10u	Electrolytic capacitor, 5mm	
C10	4u7	Electrolytic capacitor, 5mm	
C100	100u	Electrolytic capacitor, 5mm	
C101	100u	Electrolytic capacitor, 5mm	
D1	1N4148	Signal diode, DO-35	
D2	1N4148	Signal diode, DO-35	
D3	1N4148	Signal diode, DO-35	
D4	1N4148	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
IC1	TL072	Dual op-amp, DIP8	
IC2	TL071	Single op-amp, DIP8	
LEVEL	A5K	16mm right-angle PCB mount pot	
TONE	B25K	16mm right-angle PCB mount pot	
DRIVE	B100K	16mm right-angle PCB mount pot	

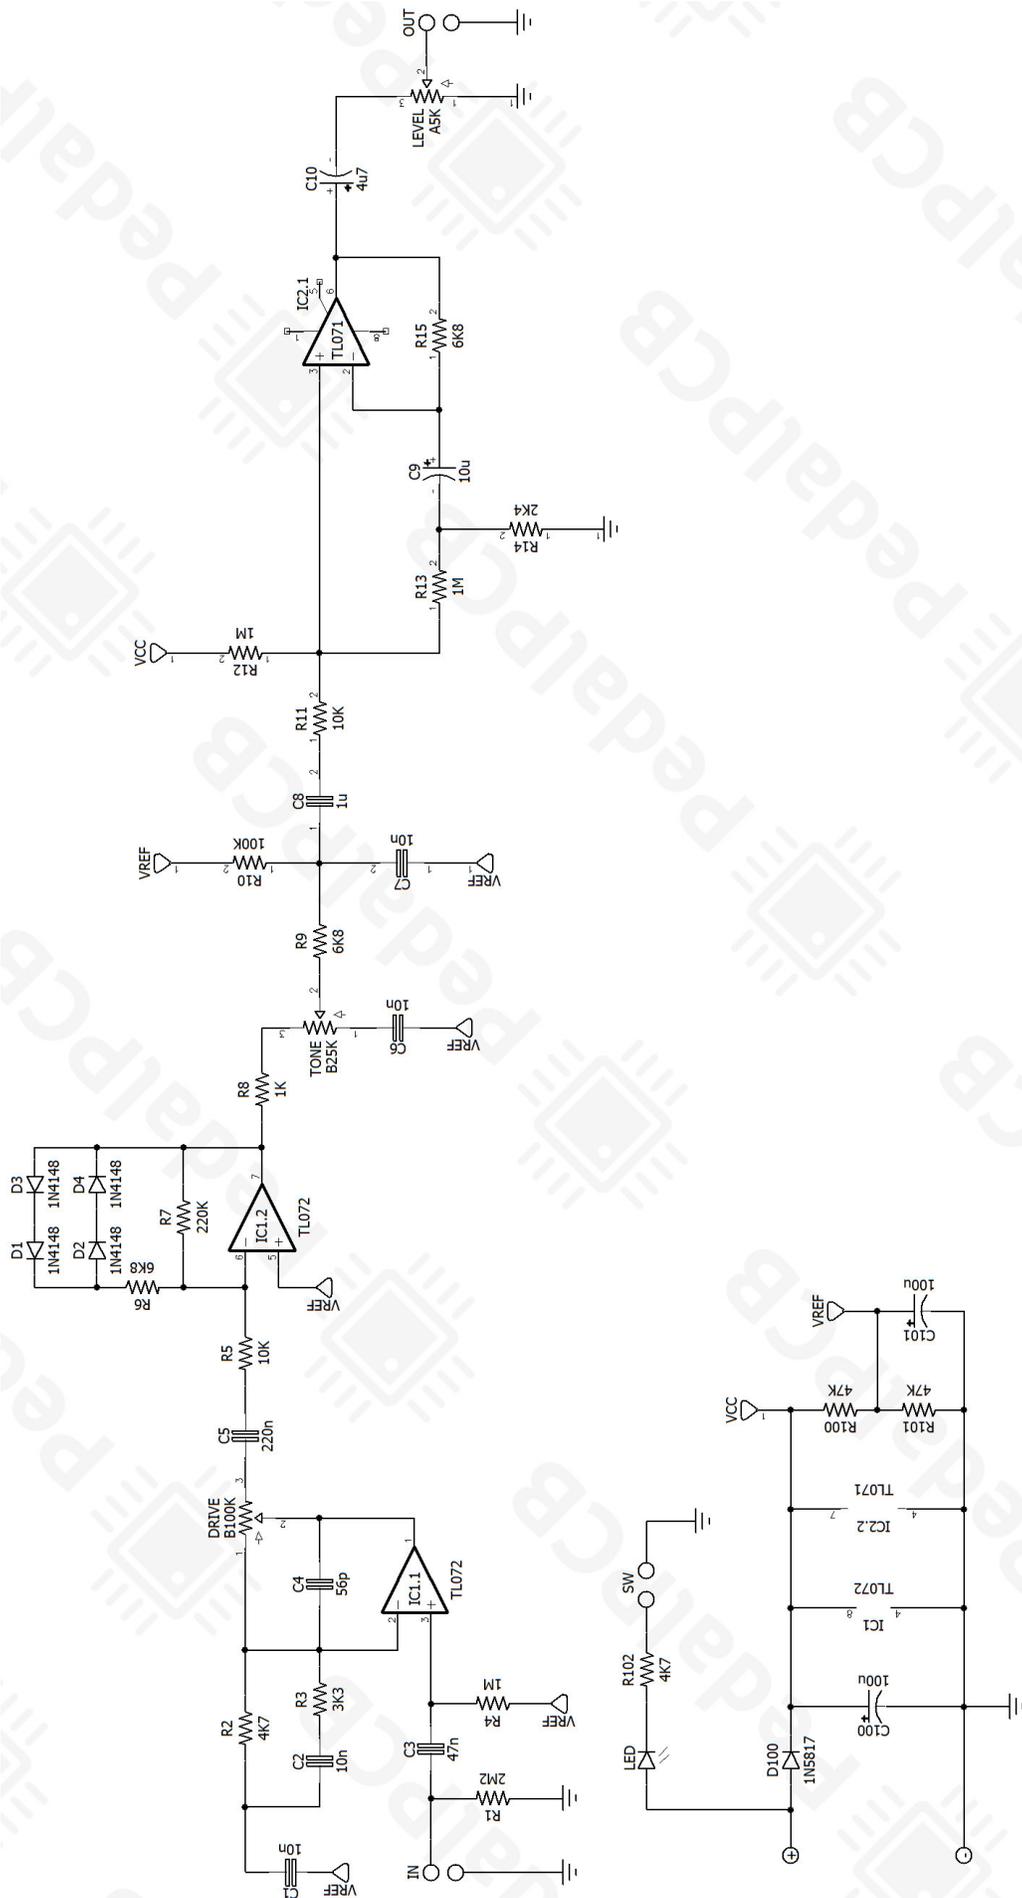

Pro-10 Blue Overdrive

Wiring Diagram

