




Proposition Distortion

Revised 8/13/23

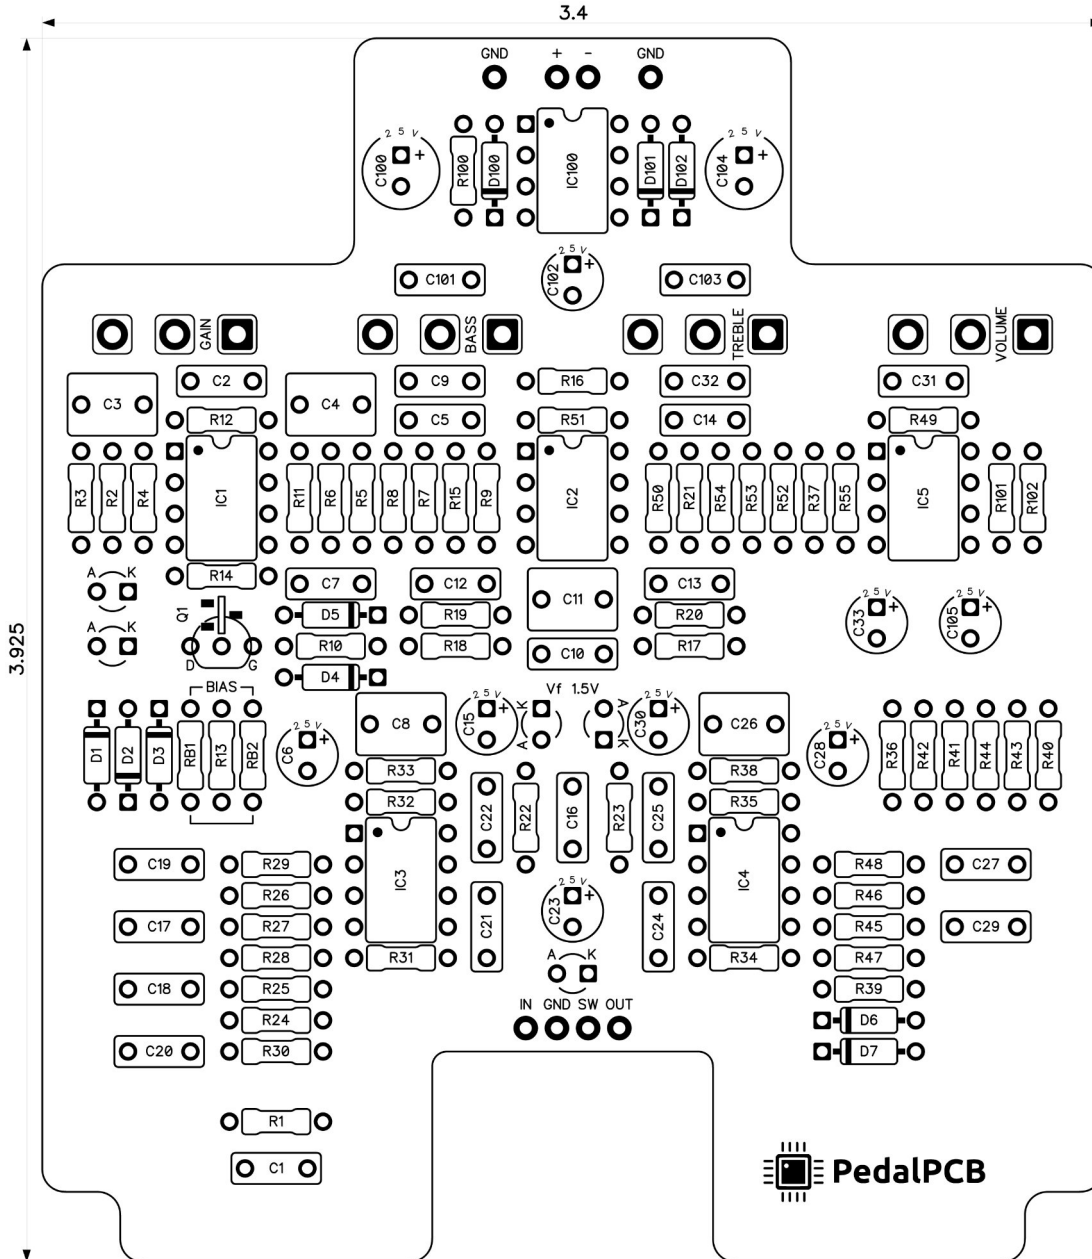

CONTROLS AND FEATURES

- Volume
- Treble
- Bass
- Gain


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	2M2	Resistor, 1/4W	
R3	1K2	Resistor, 1/4W	
R4	3K9	Resistor, 1/4W	
R5	1K8	Resistor, 1/4W	
R6	2K2	Resistor, 1/4W	
R7	5K6	Resistor, 1/4W	
R8	18K	Resistor, 1/4W	
R9	2K7	Resistor, 1/4W	
R10	3K3	Resistor, 1/4W	
R11	27K	Resistor, 1/4W	
R12	27K	Resistor, 1/4W	
R13	1M	Resistor, 1/4W	
R14	470R	Resistor, 1/4W	
R15	100K	Resistor, 1/4W	
R16	180K	Resistor, 1/4W	
R17	56K	Resistor, 1/4W	
R18	560R	Resistor, 1/4W	
R19	3K	Resistor, 1/4W	
R20	33K2	Resistor, 1/4W	
R21	4M7	Resistor, 1/4W	
R22	1K	Resistor, 1/4W	
R23	390R	Resistor, 1/4W	
R24	150K	Resistor, 1/4W	
R25	10K	Resistor, 1/4W	
R26	560K	Resistor, 1/4W	
R27	47K	Resistor, 1/4W	
R28	47K	Resistor, 1/4W	
R29	82K	Resistor, 1/4W	
R30	82K	Resistor, 1/4W	
R31	110K	Resistor, 1/4W	
R32	100K	Resistor, 1/4W	
R33	100K	Resistor, 1/4W	
R34	470R	Resistor, 1/4W	
R35	5K6	Resistor, 1/4W	
R36	2K2	Resistor, 1/4W	
R37	16K	Resistor, 1/4W	
R38	110K	Resistor, 1/4W	
R39	1K5	Resistor, 1/4W	
R40	15K	Resistor, 1/4W	
R41	12K	Resistor, 1/4W	
R42	120K	Resistor, 1/4W	
R43	82K	Resistor, 1/4W	
R44	100K	Resistor, 1/4W	
R45	470K	Resistor, 1/4W	
R46	8K2	Resistor, 1/4W	
R47	68K	Resistor, 1/4W	
		<i>Continued on next page...</i>	

LOCATION	VALUE	TYPE	NOTES
R48	56K	Resistor, 1/4W	
R49	33K2	Resistor, 1/4W	
R50	15K	Resistor, 1/4W	
R51	27K	Resistor, 1/4W	
R52	18K	Resistor, 1/4W	
R53	15K	Resistor, 1/4W	
R54	27K	Resistor, 1/4W	
R55	470R	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	47K	Resistor, 1/4W	
R102	47K	Resistor, 1/4W	
RB1	6M2	Resistor, 1/4W	
RB2	5M1	Resistor, 1/4W	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C2	8n2	Film capacitor, 7.2 x 2.5mm	
C3	220n	Film capacitor, 7.2 x 5.0mm	
C4	180n	Film capacitor, 7.2 x 5.0mm	
C5	12n	Film capacitor, 7.2 x 2.5mm	
C6	10u	Electrolytic capacitor, 5mm	25VDC minimum
C7	8n2	Film capacitor, 7.2 x 2.5mm	
C8	220n	Film capacitor, 7.2 x 5.0mm	
C9	1n8	Film capacitor, 7.2 x 2.5mm	
C10	560p	Ceramic capacitor	
C11	150n	Film capacitor, 7.2 x 5.0mm	
C12	8n2	Film capacitor, 7.2 x 2.5mm	
C13	12n	Film capacitor, 7.2 x 2.5mm	
C14	15p	Ceramic capacitor	
C15	10u	Electrolytic capacitor, 5mm	25VDC minimum
C16	15n	Film capacitor, 7.2 x 2.5mm	
C17	560p	Ceramic capacitor	
C18	4n7	Film capacitor, 7.2 x 2.5mm	
C19	1n5	Film capacitor, 7.2 x 2.5mm	
C20	8n2	Film capacitor, 7.2 x 2.5mm	
C21	82p	Ceramic capacitor	
C22	2n7	Film capacitor, 7.2 x 2.5mm	
C23	10u	Electrolytic capacitor, 5mm	25VDC minimum
C24	18n	Film capacitor, 7.2 x 2.5mm	
C25	27n	Film capacitor, 7.2 x 2.5mm	
C26	180n	Film capacitor, 7.2 x 5.0mm	
C27	2n7	Film capacitor, 7.2 x 2.5mm	
C28	10u	Electrolytic capacitor, 5mm	25VDC minimum
C29	390p	Ceramic capacitor	
C30	10u	Electrolytic capacitor, 5mm	25VDC minimum
C31	3n3	Film capacitor, 7.2 x 2.5mm	
C32	15n	Film capacitor, 7.2 x 2.5mm	
		<i>Continued on next page...</i>	


Proposition Distortion

Schematic Diagram

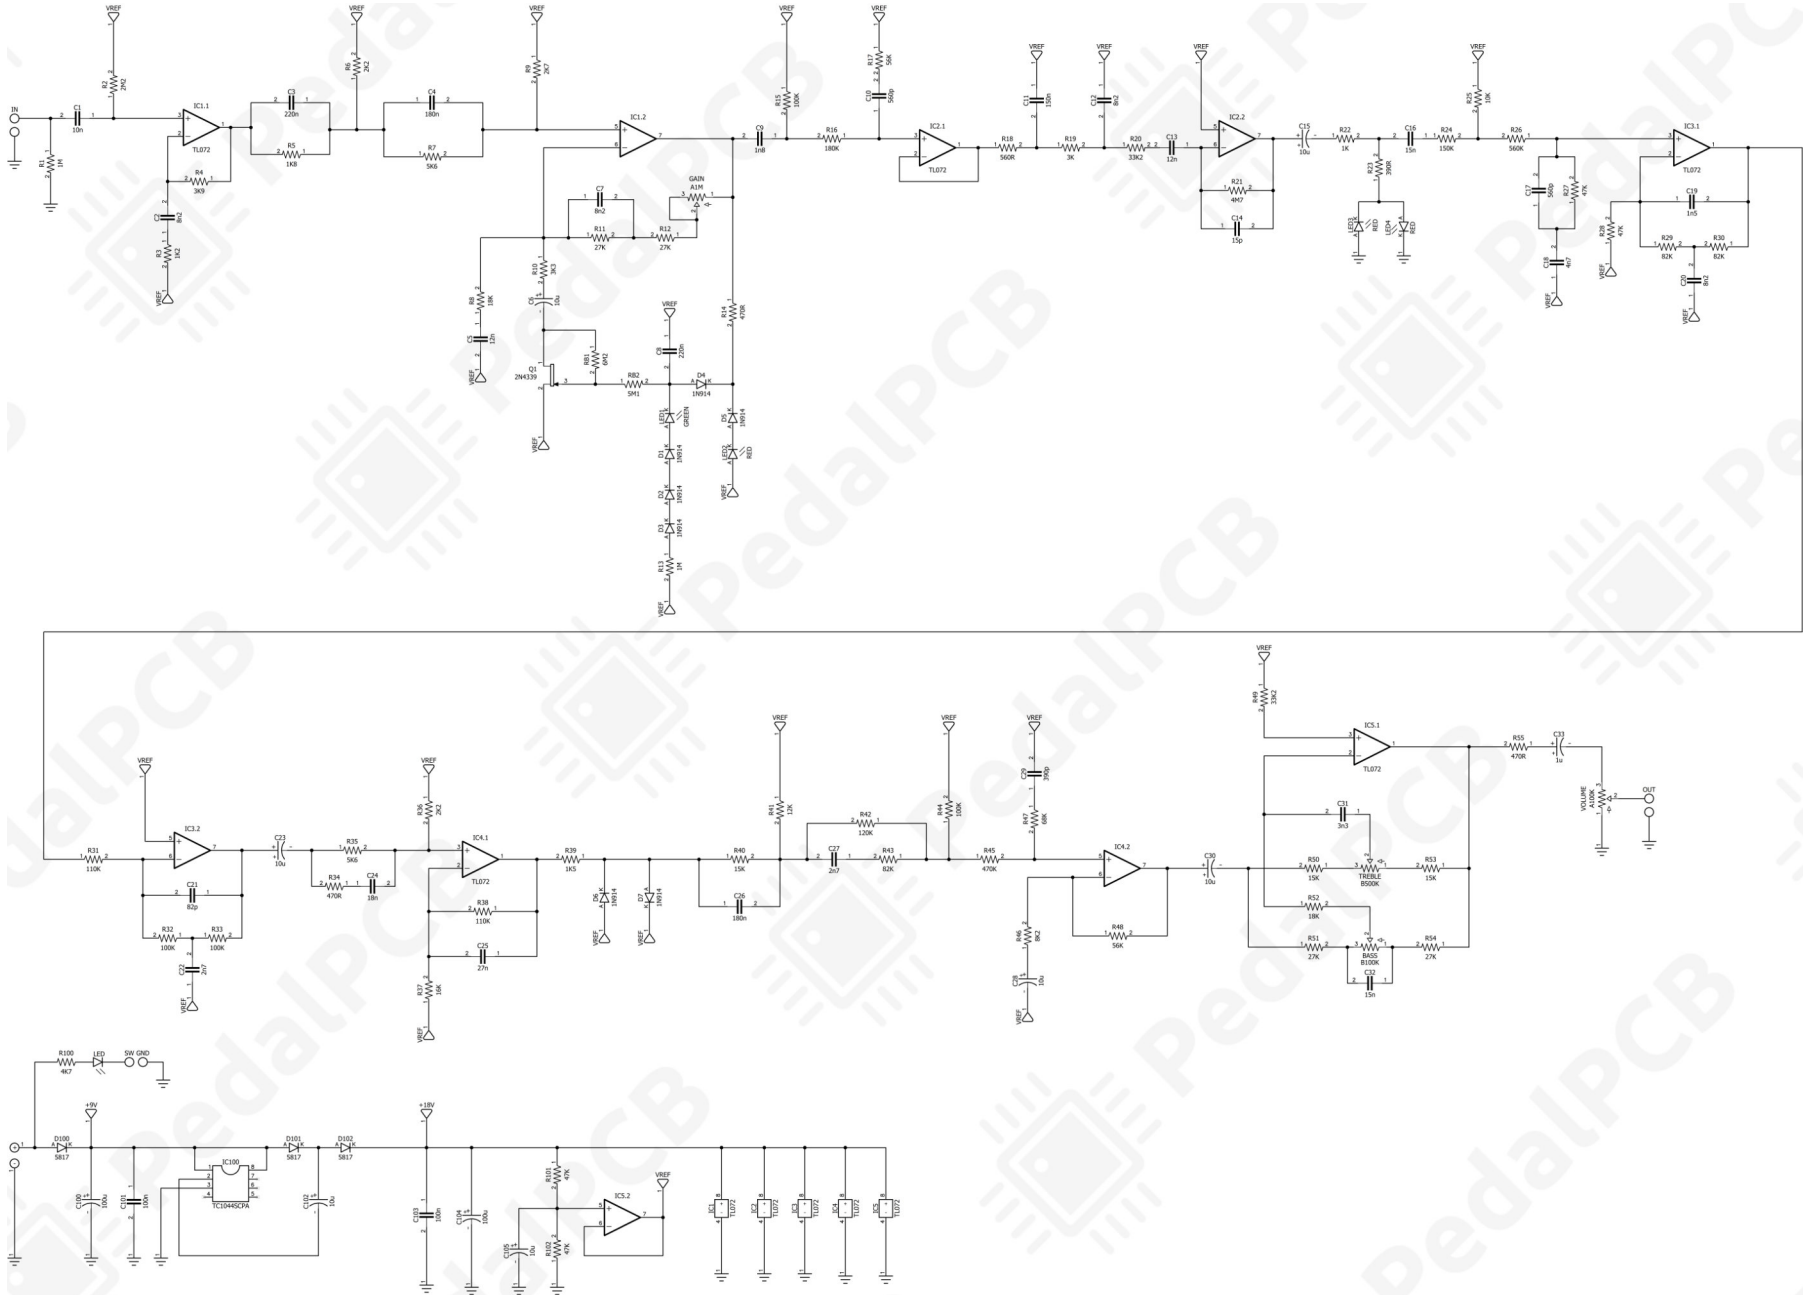

Proposition Distortion

Wiring Diagram

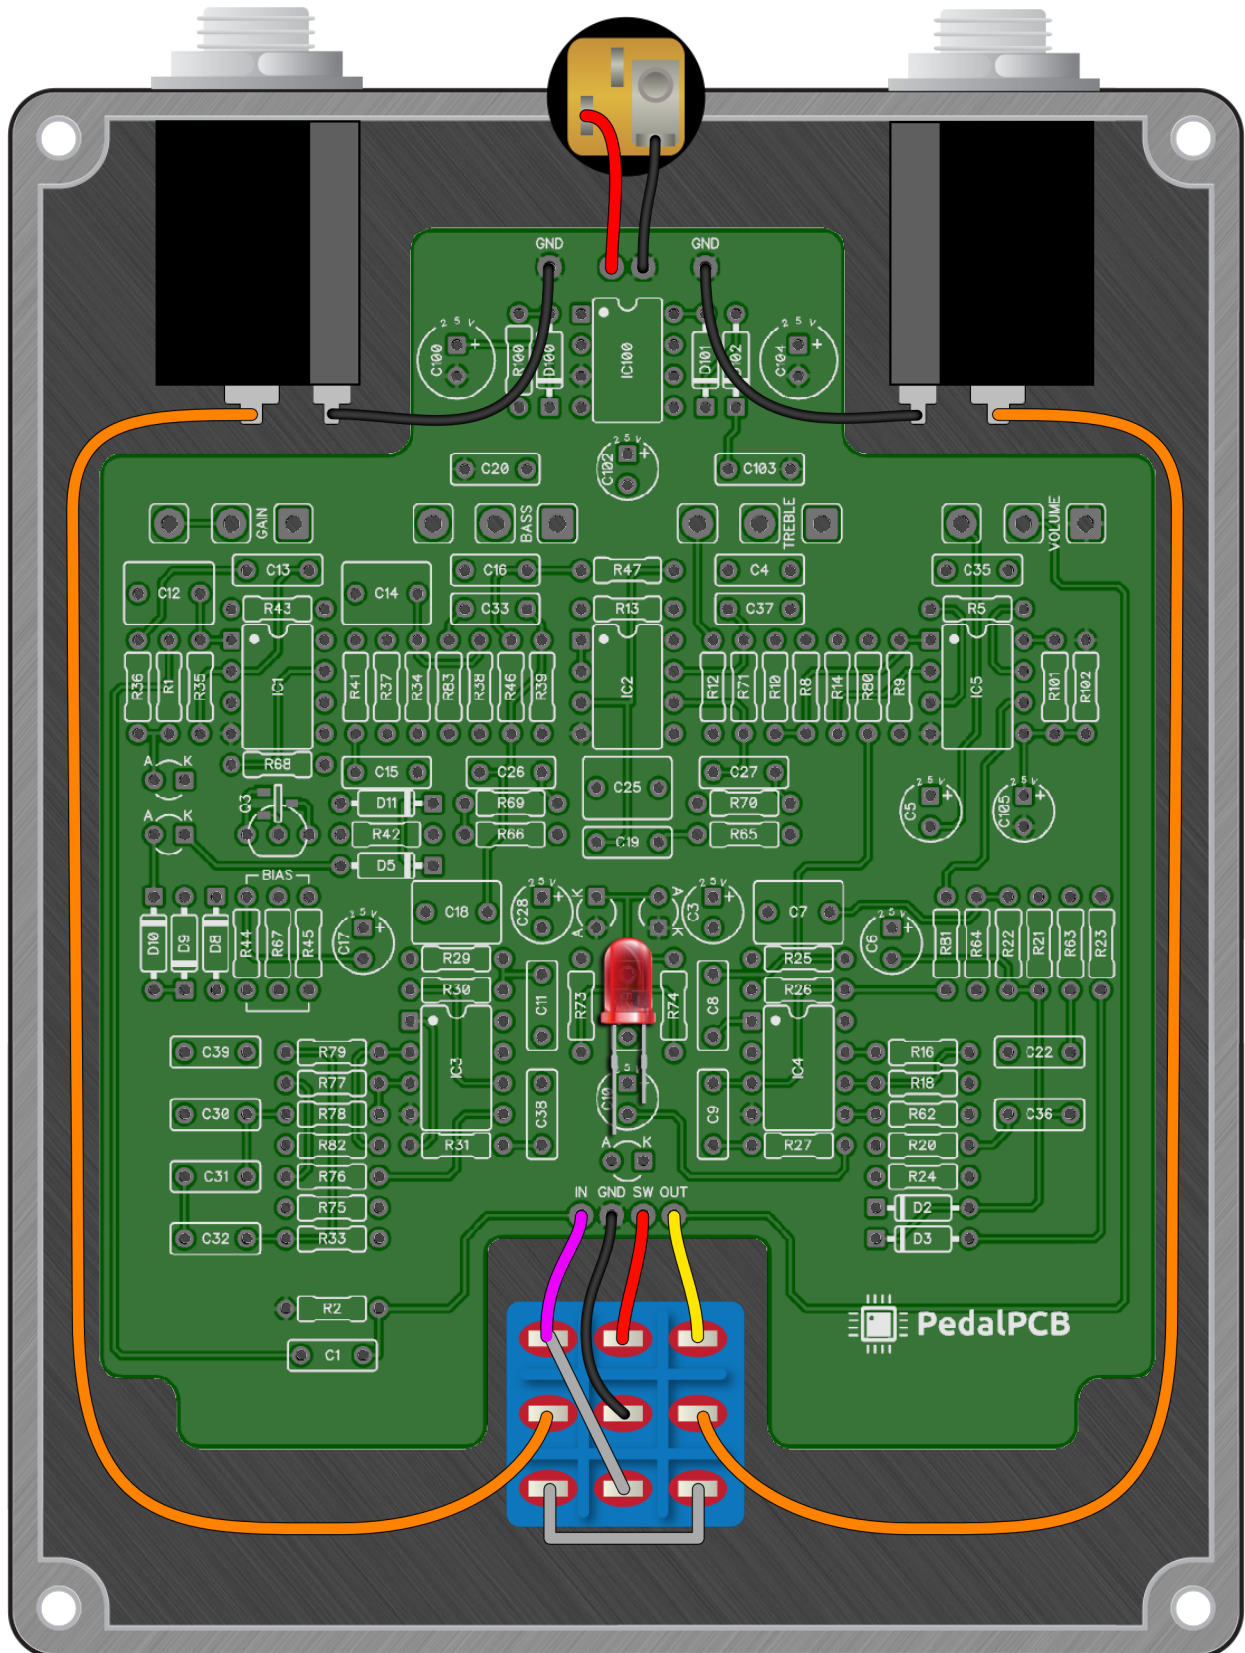

Proposition Distortion

Drill Template
1590BB Enclosure

