


PedalPCB

Resinite Overdrive

Revised 8/8/21

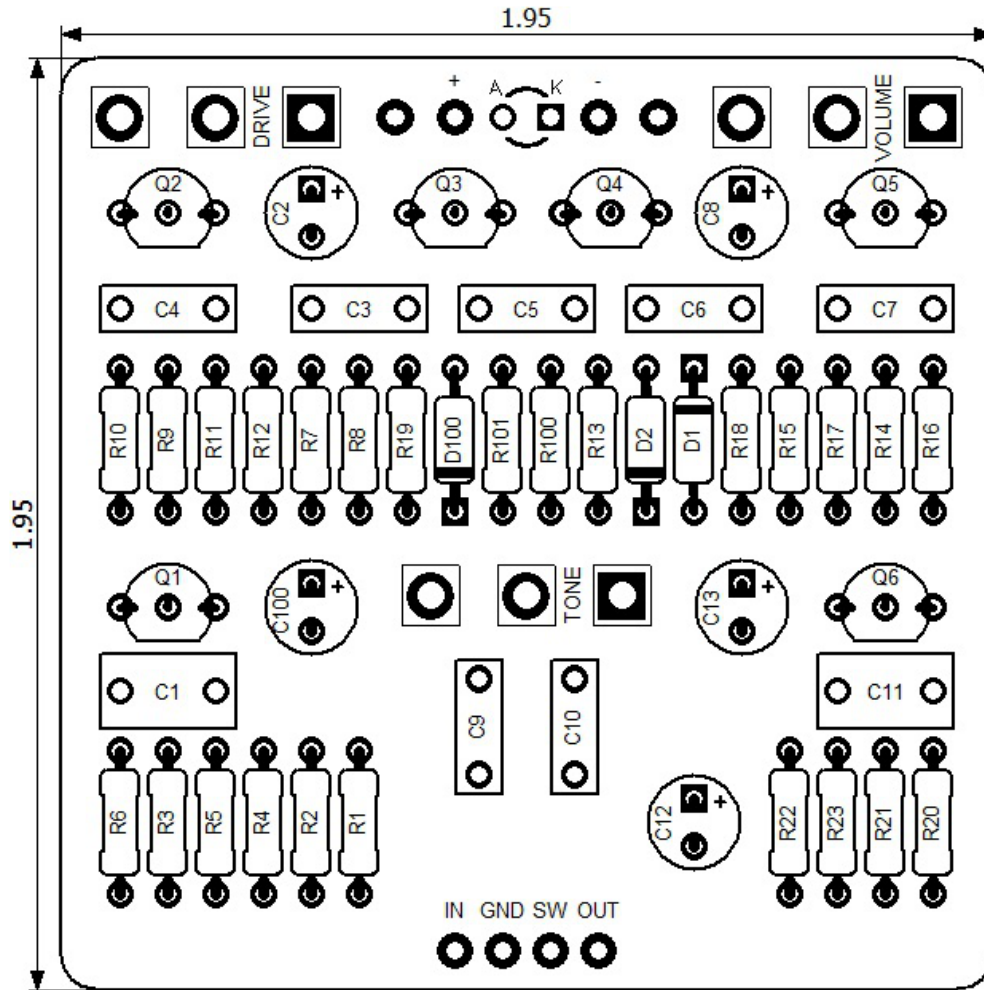

CONTROLS AND FEATURES

- Volume
- Drive
- Tone

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	47K	Resistor, 1/4W	
R3	100K	Resistor, 1/4W	
R4	470K	Resistor, 1/4W	
R5	100R	Resistor, 1/4W	
R6	15K	Resistor, 1/4W	
R7	470R	Resistor, 1/4W	
R8	8K2	Resistor, 1/4W	
R9	100K	Resistor, 1/4W	
R10	470K	Resistor, 1/4W	
R11	100R	Resistor, 1/4W	
R12	12K	Resistor, 1/4W	
R13	8K2	Resistor, 1/4W	
R14	100K	Resistor, 1/4W	
R15	470K	Resistor, 1/4W	
R16	150R	Resistor, 1/4W	
R17	15K	Resistor, 1/4W	
R18	22K	Resistor, 1/4W	
R19	1M	Resistor, 1/4W	
R20	68K	Resistor, 1/4W	
R21	6K8	Resistor, 1/4W	
R22	2K	Resistor, 1/4W	
R23	14K7	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	100R	Resistor, 1/4W	
C1	15n	Film capacitor, 7.2 x 2.5mm	
C2	1u	Electrolytic capacitor, 5mm	
C3	47n	Film capacitor, 7.2 x 2.5mm	
C4	470p	Ceramic capacitor	
C5	100n	Film capacitor, 7.2 x 2.5mm	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	330p	Ceramic capacitor	
C8	1u	Electrolytic capacitor, 5mm	
C9	100n	Film capacitor, 7.2 x 2.5mm	
C10	10n	Film capacitor, 7.2 x 2.5mm	
C11	220n	Film capacitor, 7.2 x 5.0mm	
C12	10u	Electrolytic capacitor, 5mm	
C13	1u	Electrolytic capacitor, 5mm	
C100	100u	Electrolytic capacitor, 5mm	
D1	1N4007	Signal diode, DO-35	
D2	1N4007	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
		<i>Continued on next page...</i>	



Resinite Overdrive

Parts List (Page 2 of 2)

[illegible]



Schematic Diagram



