


PedalPCB

Sugarbag Overdrive

Revised 4/9/21

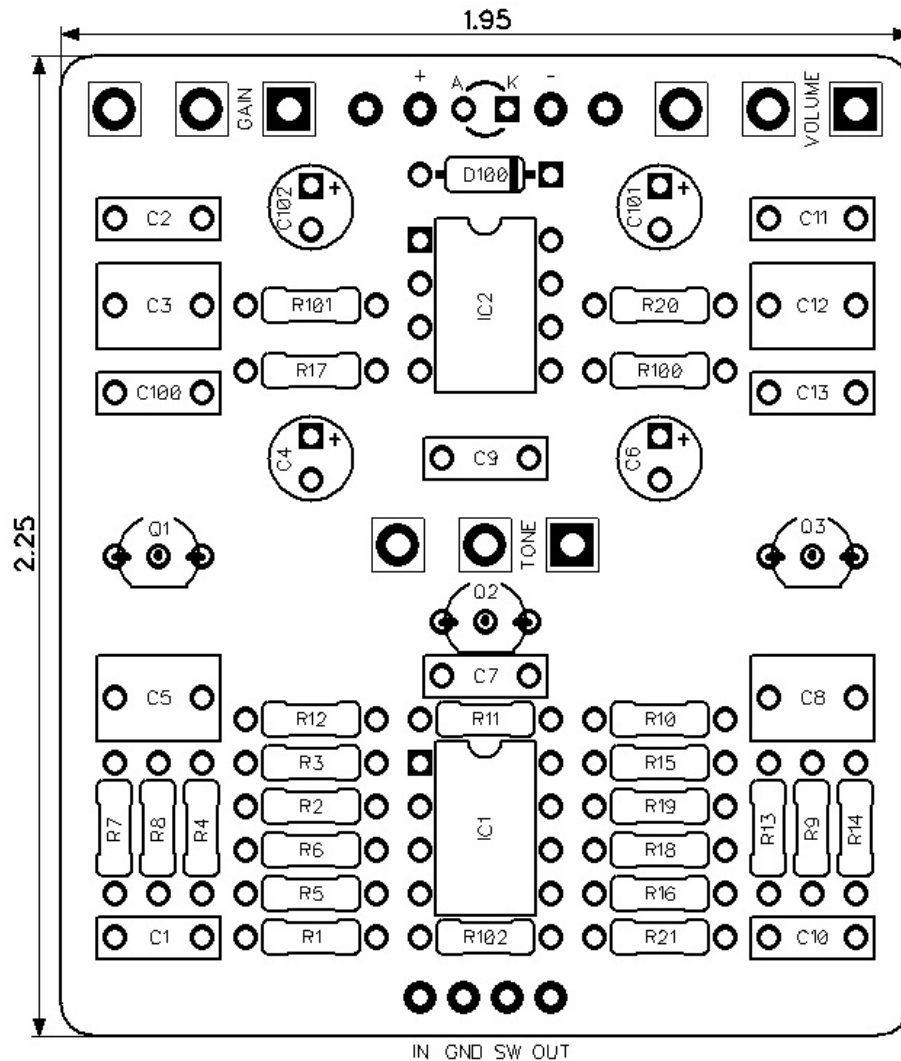

CONTROLS AND FEATURES

- Volume
- Tone
- Gain

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.


LOCATION	VALUE	TYPE	NOTES
R1	10M	Resistor, 1/4W	
R2	390K	Resistor, 1/4W	
R3	4K7	Resistor, 1/4W	
R4	10M	Resistor, 1/4W	
R5	12K	Resistor, 1/4W	
R6	2K7	Resistor, 1/4W	
R7	51K	Resistor, 1/4W	
R8	27K	Resistor, 1/4W	
R9	56K	Resistor, 1/4W	
R10	10M	Resistor, 1/4W	
R11	12K	Resistor, 1/4W	
R12	27K	Resistor, 1/4W	
R13	1K8	Resistor, 1/4W	
R14	560R	Resistor, 1/4W	
R15	1M	Resistor, 1/4W	
R16	10K	Resistor, 1/4W	
R17	3K3	Resistor, 1/4W	
R18	10K	Resistor, 1/4W	
R19	47K	Resistor, 1/4W	
R20	2K2	Resistor, 1/4W	
R21	10M	Resistor, 1/4W	
R100	10K	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
R102	4K7	Resistor, 1/4W	
C1	22n	Film capacitor, 7.2 x 2.5mm	
C2	56p	Ceramic capacitor	
C3	1u	Film capacitor, 7.2 x 5.0mm	
C4	22u	Electrolytic capacitor, 5mm	
C5	1u	Film capacitor, 7.2 x 5.0mm	
C6	22u	Electrolytic capacitor, 5mm	
C7	1n5	Film capacitor, 7.2 x 2.5mm	
C8	1u	Film capacitor, 7.2 x 5.0mm	
C9	33n	Film capacitor, 7.2 x 2.5mm	
C10	2n2	Film capacitor, 7.2 x 2.5mm	
C11	220p	Ceramic capacitor	
C12	15n	Film capacitor, 7.2 x 2.5mm	
C13	100n	Film capacitor, 7.2 x 2.5mm	
C100	10n	Film capacitor, 7.2 x 2.5mm	
C101	470u	Electrolytic capacitor, 5mm	
C102	10u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	J113	JFET transistor, N-channel	
Q2	J113	JFET transistor, N-channel	
Q3	2N5088	BJT transistor, NPN TO-92	
		<i>Continued on next page...</i>	




Sugarbag Overdrive

Parts List (Page 2 of 2)

[illegible]

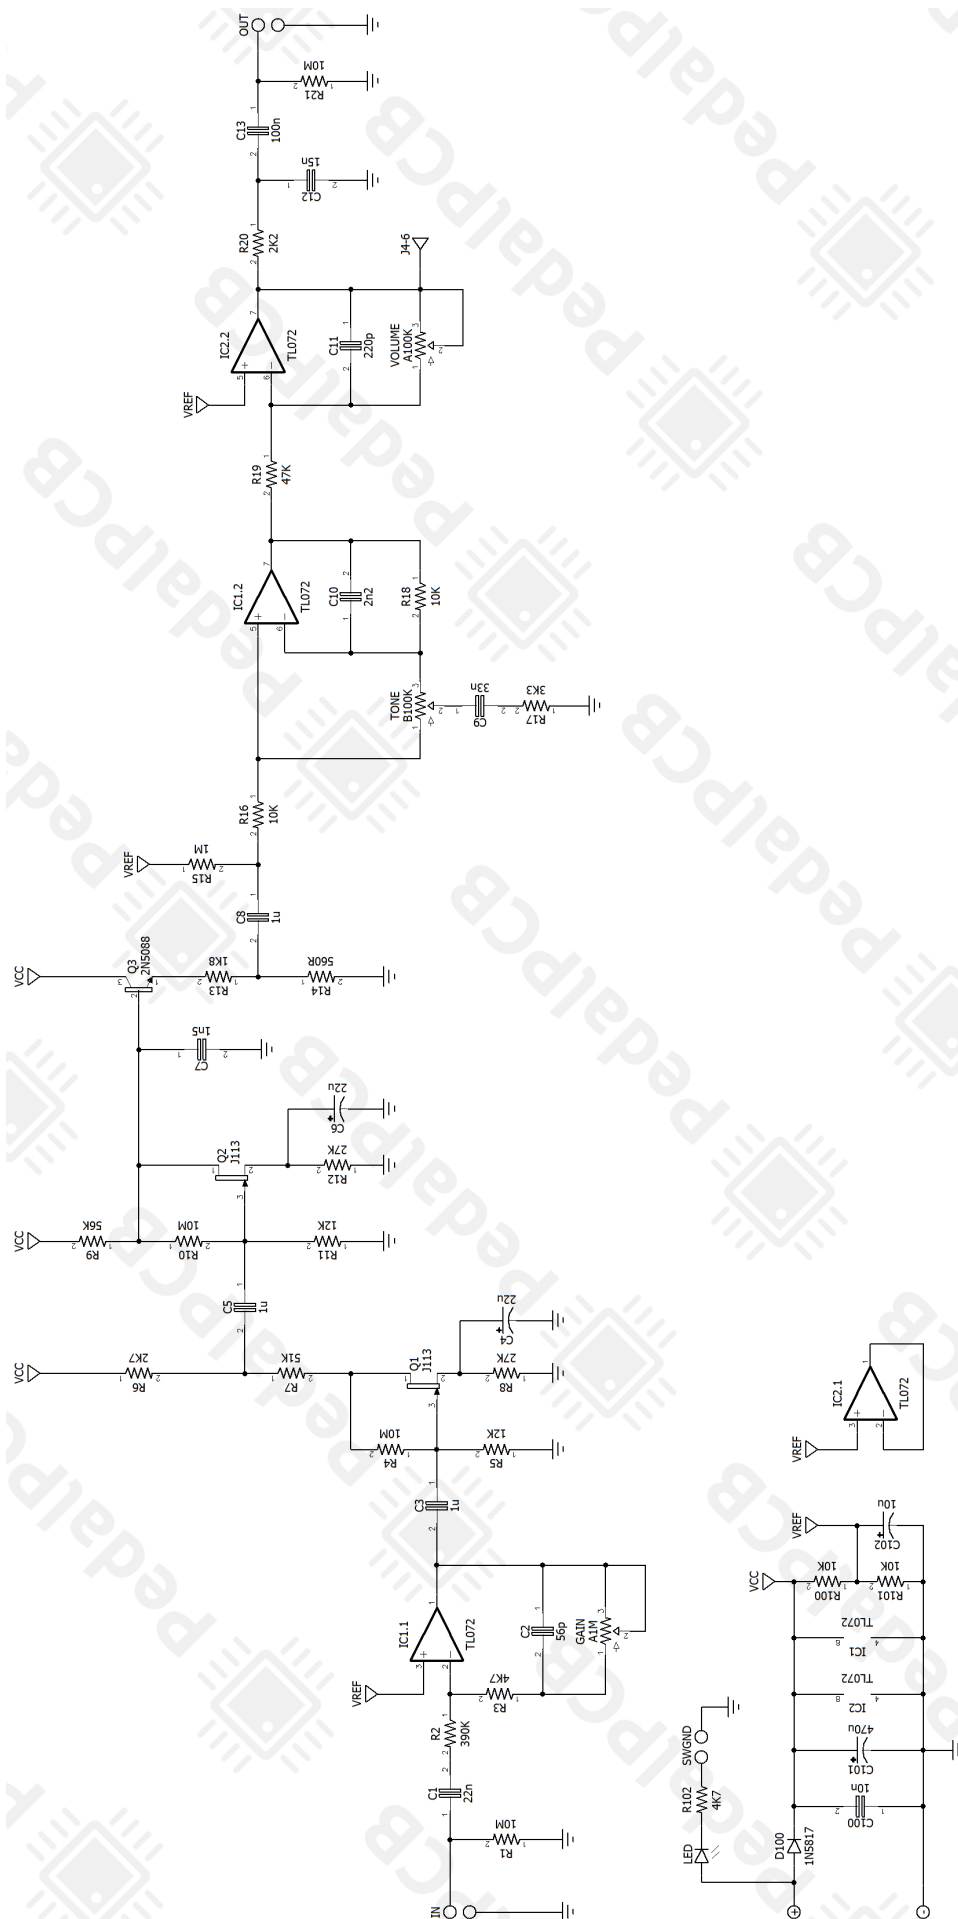

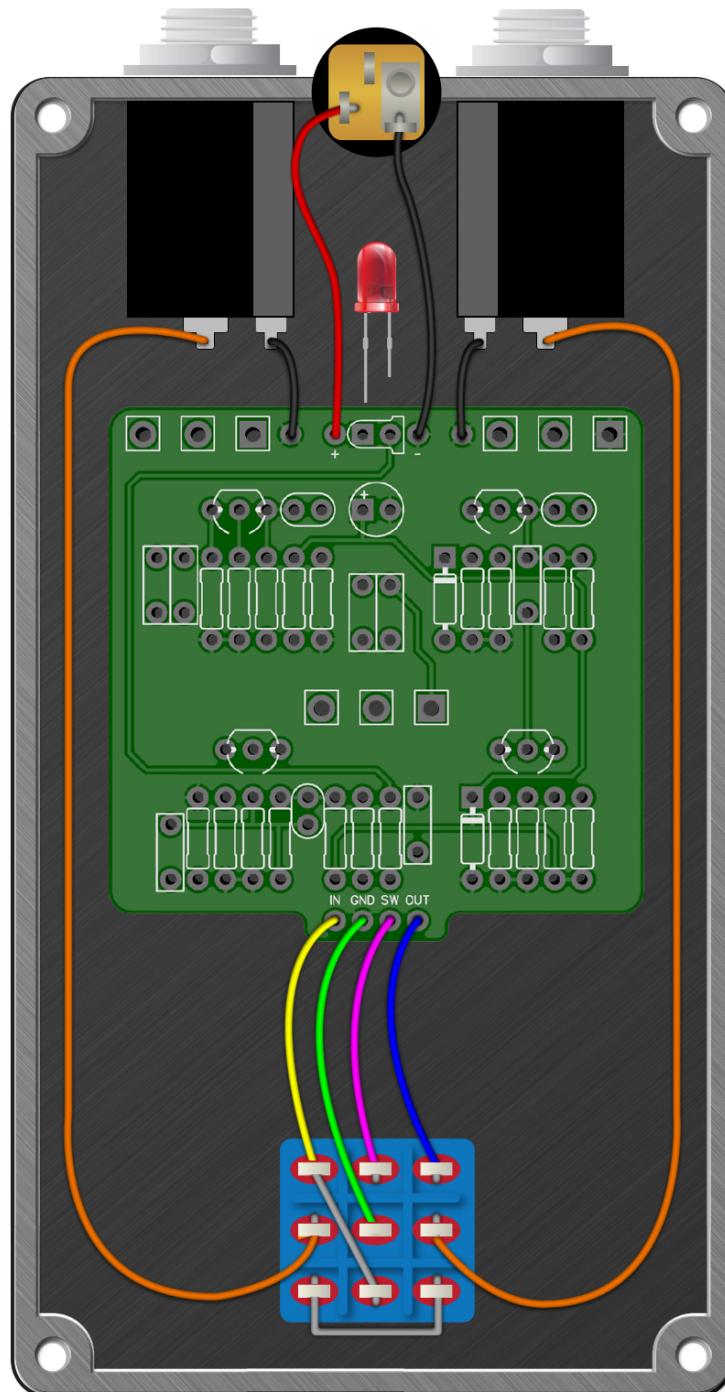

Sugarbag Overdrive

Drill Template
125B Enclosure

