




# PedalPCB

## UniCab

Revision 11.04.18

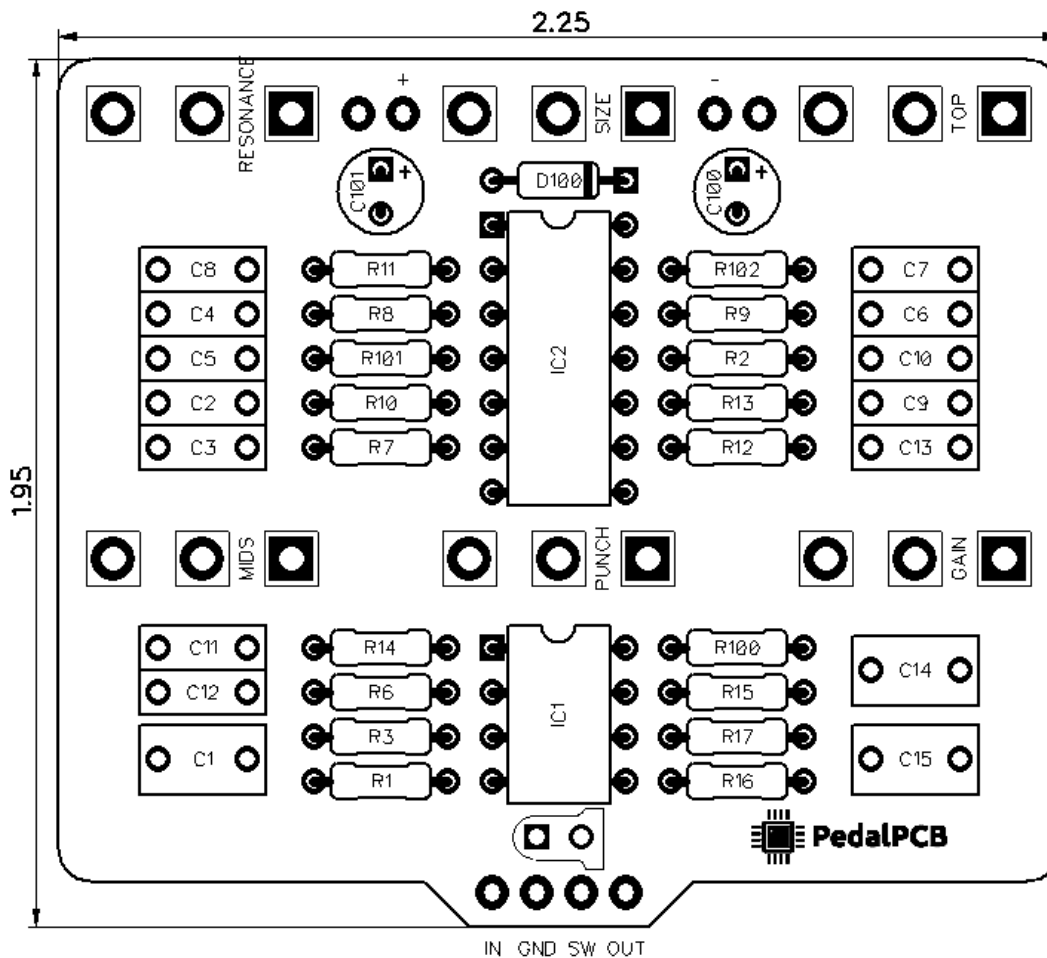

### Controls

- Top
- Size
- Resonance
- Gain
- Punch
- Mids

**RESISTORS (1/4W)**

R1 1M  
 R2 1M  
 R3 10K  
 R6 1K  
 R7 22K  
 R8 10K  
 R9 4K7  
 R10 10K  
 R11 1K  
 R12 4K7  
 R13 100K  
 R14 15K  
 R15 10K  
 R16 10K  
 R17 100K  
 R100 4K7  
 R101 33K  
 R102 33K

**CAPACITORS**

C1 470n  
 C2 100n  
 C3 100n  
 C4 4n7  
 C5 470p  
 C6 8n2  
 C7 1n  
 C8 10n  
 C9 47n  
 C10 47n  
 C11 5n6  
 C12 18n  
 C13 3n3  
 C14 470n  
 C15 470n  
 C100 100u  
 C101 22u

**INTEGRATED CIRCUITS**

IC1 TL072  
 IC2 TL074

**DIODES**

D100 1N5817

**POTENTIOMETERS**

TOP B100K  
 SIZE A500K  
 RESONANCE B100K  
 GAIN A100K  
 PUNCH B100K  
 MIDS A10K

