




Wrectifier Distortion

Revised 9/7/22

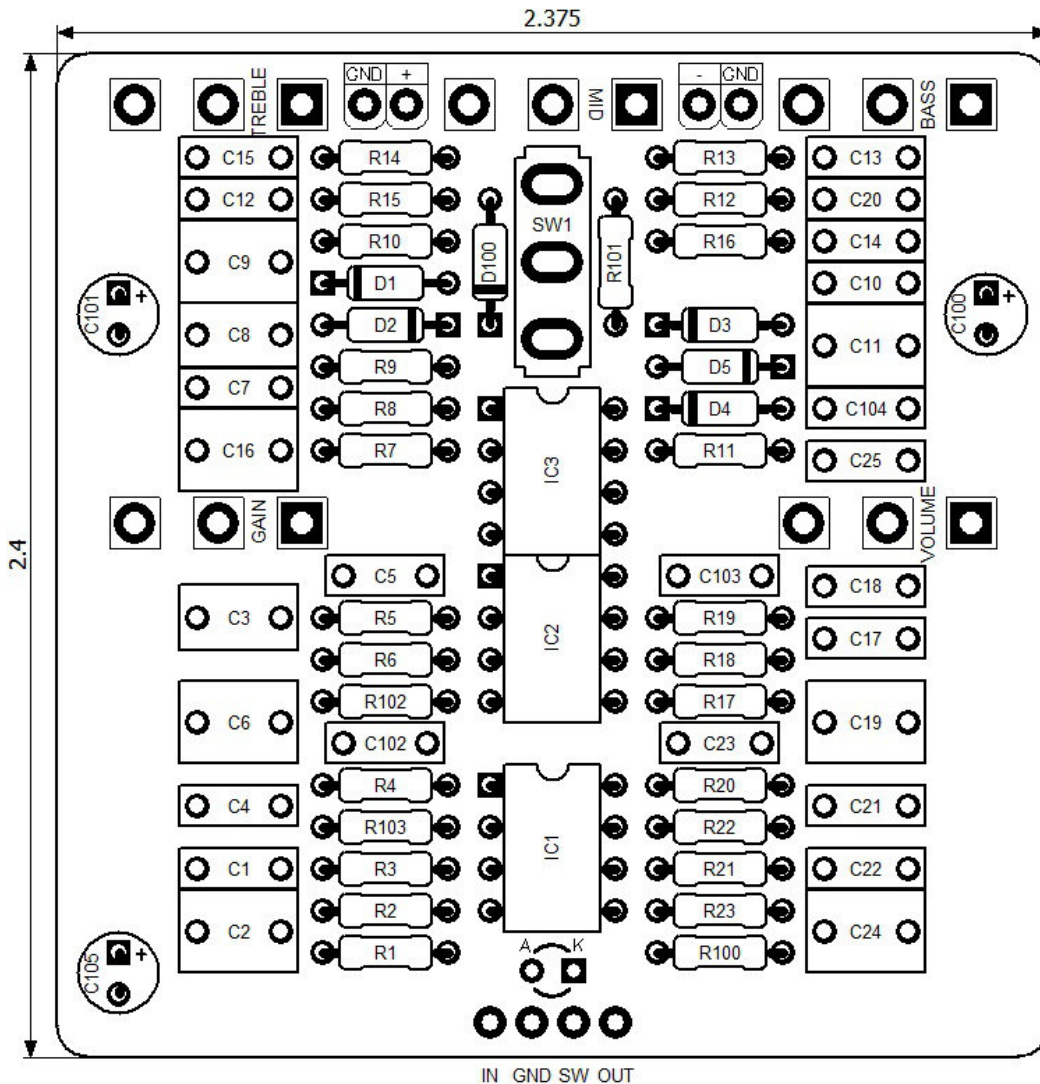


CONTROLS AND FEATURES

- Bass
- Mid
- Treble
- Volume
- Gain

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.


LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	1K	Resistor, 1/4W	
R3	470K	Resistor, 1/4W	
R4	10K	Resistor, 1/4W	
R5	1K	Resistor, 1/4W	
R6	470K	Resistor, 1/4W	
R7	10K	Resistor, 1/4W	
R8	470K	Resistor, 1/4W	
R9	1K	Resistor, 1/4W	
R10	47K	Resistor, 1/4W	
R11	100K	Resistor, 1/4W	
R12	1K	Resistor, 1/4W	
R13	10K	Resistor, 1/4W	
R14	4K7	Resistor, 1/4W	
R15	470K	Resistor, 1/4W	
R16	1K	Resistor, 1/4W	
R17	470K	Resistor, 1/4W	
R18	47K	Resistor, 1/4W	
R19	47K	Resistor, 1/4W	
R20	33K	Resistor, 1/4W	
R21	33K	Resistor, 1/4W	
R22	680K	Resistor, 1/4W	
R23	10K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	10R	Resistor, 1/4W	
R102	10K	Resistor, 1/4W	
R103	10K	Resistor, 1/4W	
C1	220p	Ceramic capacitor	
C2	220n	Film capacitor, 7.2 x 5.0mm	
C3	220n	Film capacitor, 7.2 x 5.0mm	
C4	33n	Film capacitor, 7.2 x 2.5mm	
C5	560p	Ceramic capacitor	
C6	1u	Film capacitor, 7.2 x 5.0mm	
C7	220p	Ceramic capacitor	
C8	220n	Film capacitor, 7.2 x 2.5mm	
C9	1u	Film capacitor, 7.2 x 5.0mm	
C10	220p	Ceramic capacitor	
C11	1u	Film capacitor, 7.2 x 5.0mm	
C12	4n7	Film capacitor, 7.2 x 2.5mm	
C13	47n	Film capacitor, 7.2 x 2.5mm	
C14	100n	Film capacitor, 7.2 x 2.5mm	
C15	47n	Film capacitor, 7.2 x 2.5mm	
C16	1u	Film capacitor, 7.2 x 5.0mm	
C17	47n	Film capacitor, 7.2 x 2.5mm	
C18	470p	Ceramic capacitor	
C19	1u	Film capacitor, 7.2 x 5.0mm	
		<i>Continued on next page...</i>	




Wrectifier Distortion

Parts List (Page 2 of 2)

[illegible]

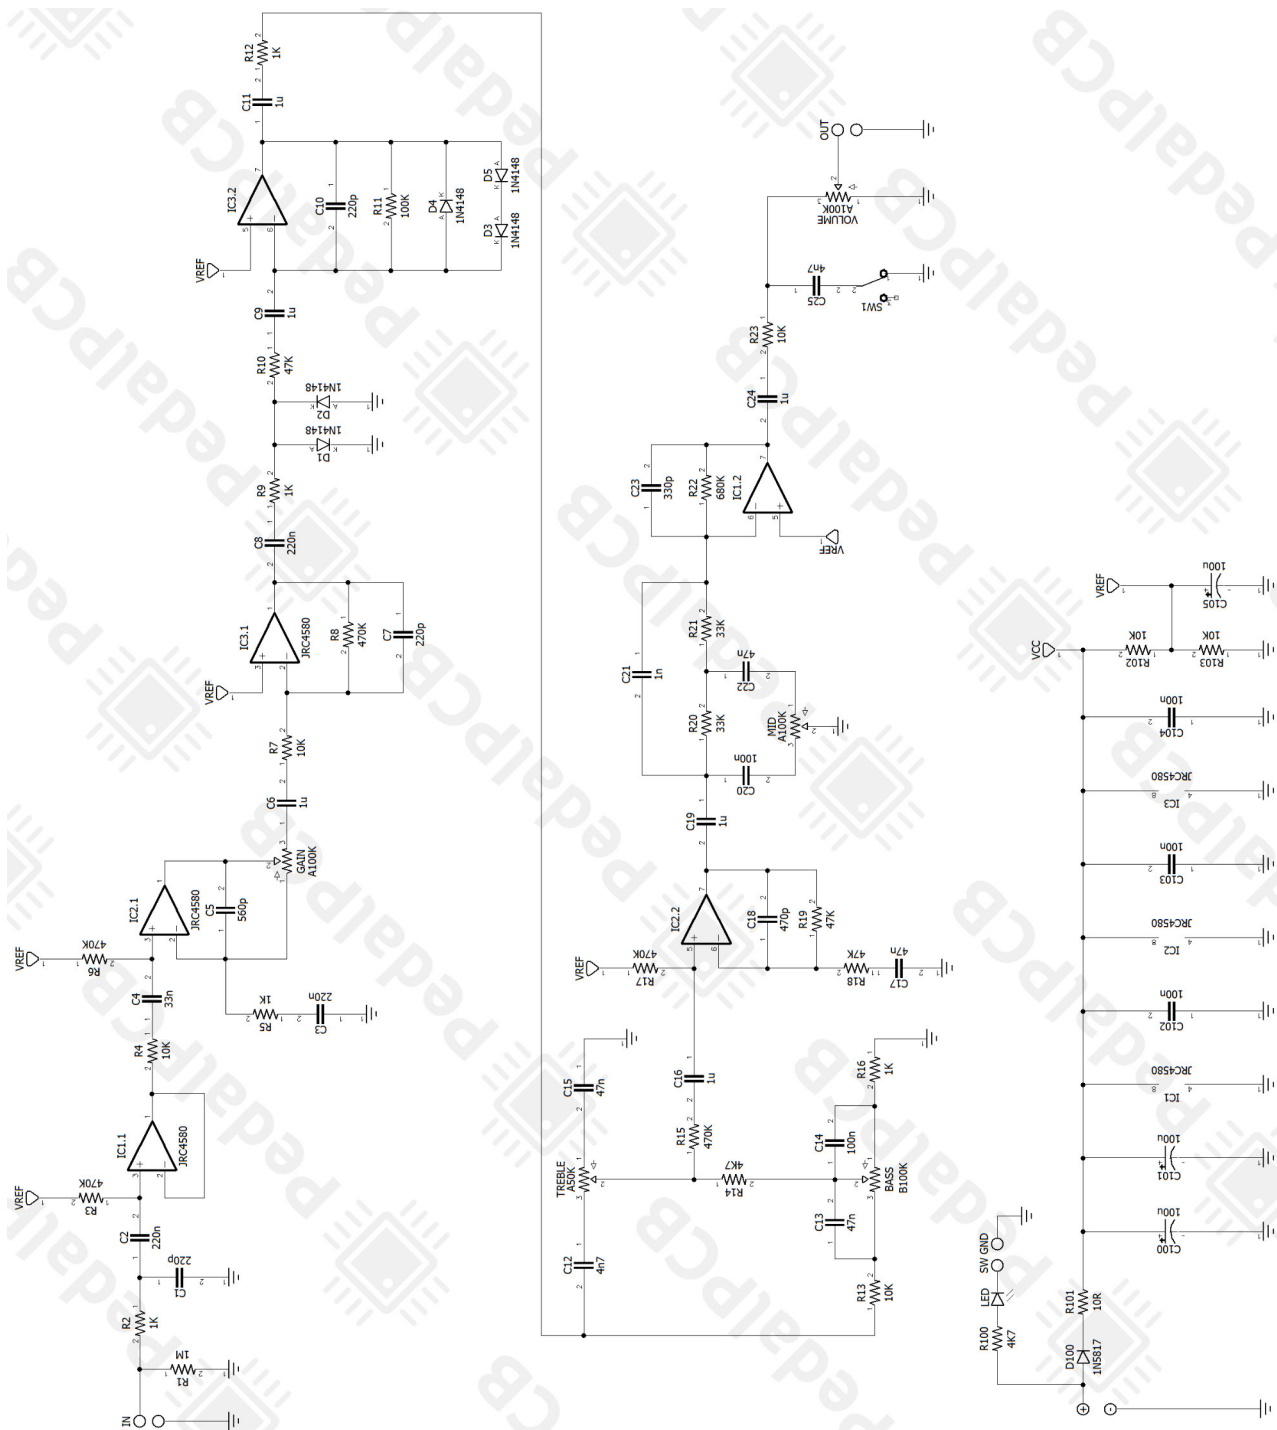

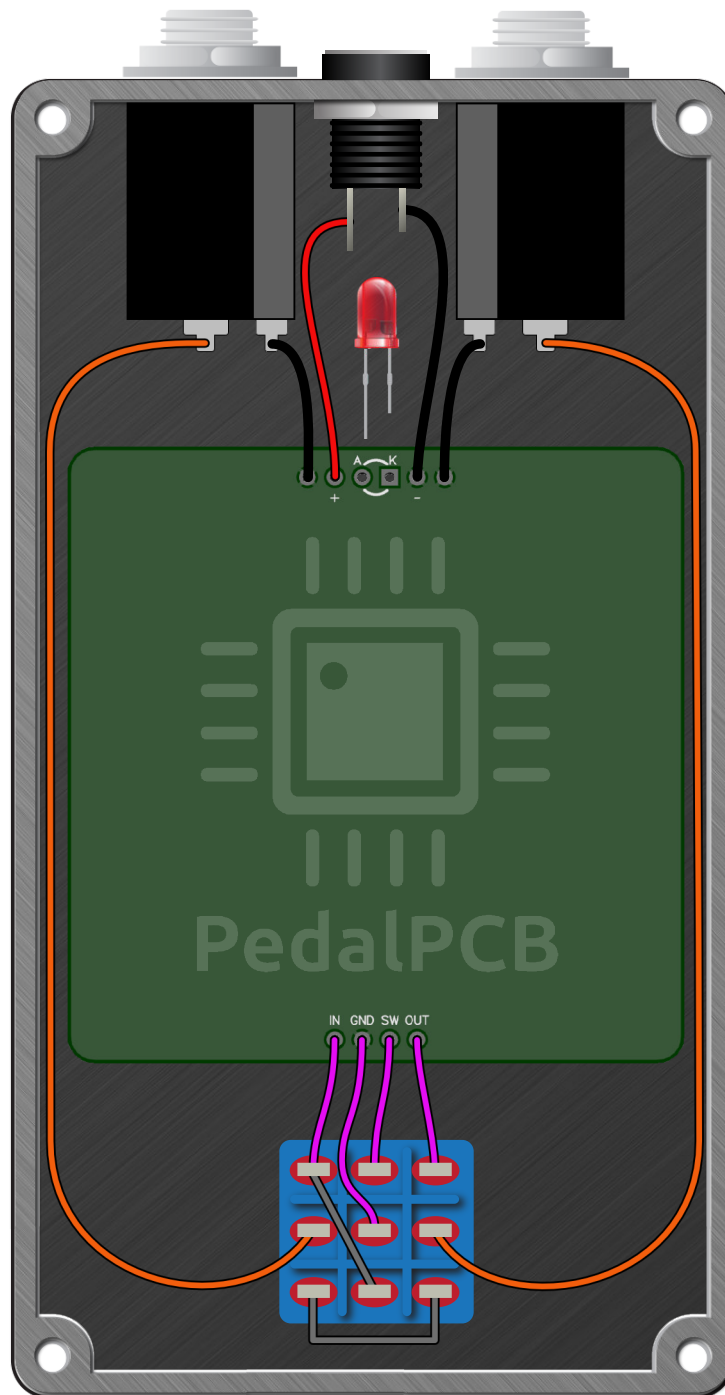

Wrectifier Distortion

Drill Template
125B Enclosure

