




Bad Mamma Jamma Distortion

Revised 12/16/22

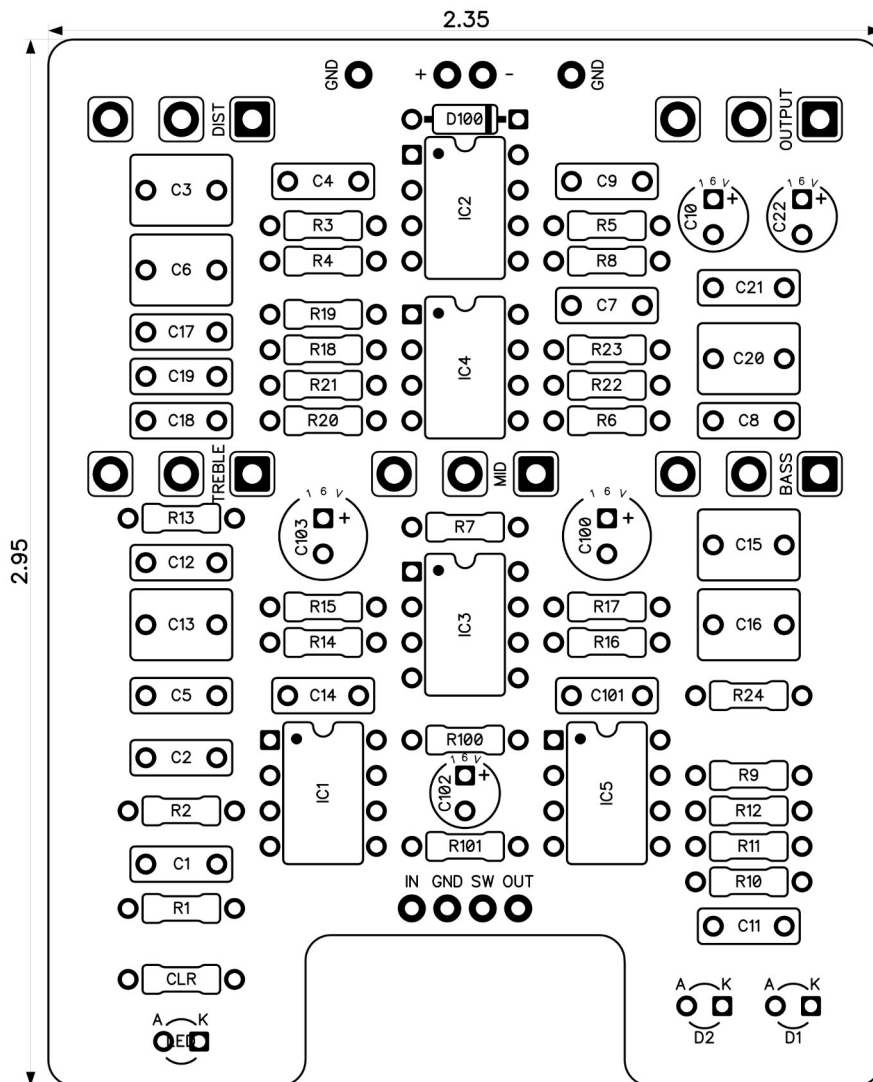

CONTROLS AND FEATURES

- Output
- Distortion
- Bass
- Mid
- Treble


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



PedalPCB **Bad Mamma Jamma Distortion**

Parts List (Page 1 of 2)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	1M	Resistor, 1/4W	
R3	1K	Resistor, 1/4W	
R4	4K7	Resistor, 1/4W	
R5	6K8	Resistor, 1/4W	
R6	100K	Resistor, 1/4W	
R7	2K2	Resistor, 1/4W	
R8	470K	Resistor, 1/4W	
R9	1K	Resistor, 1/4W	
R10	20K	Resistor, 1/4W	
R11	220K	Resistor, 1/4W	
R12	2K2	Resistor, 1/4W	
R13	820R	Resistor, 1/4W	
R14	20K	Resistor, 1/4W	
R15	470R	Resistor, 1/4W	
R16	24K	Resistor, 1/4W	
R17	470R	Resistor, 1/4W	
R18	2K2	Resistor, 1/4W	
R19	5K6	Resistor, 1/4W	
R20	5K6	Resistor, 1/4W	
R21	10K	Resistor, 1/4W	
R22	100K	Resistor, 1/4W	
R23	100K	Resistor, 1/4W	
R24	470R	Resistor, 1/4W	
R100	100K	Resistor, 1/4W	
R101	100K	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	* LED current limiting resistor
C1	1n	Film capacitor, 7.2 x 2.5mm	
C2	47n	Film capacitor, 7.2 x 2.5mm	
C3	220n	Film capacitor, 7.2 x 5.0mm	
C4	100p	Ceramic capacitor	
C5	100n	Film capacitor, 7.2 x 2.5mm	
C6	220n	Film capacitor, 7.2 x 5.0mm	
C7	100n	Film capacitor, 7.2 x 2.5mm	
C8	2n2	Film capacitor, 7.2 x 2.5mm	
C9	220p	Ceramic capacitor	
C10	2u2	Electrolytic capacitor, 5.0mm	
C11	100n	Film capacitor, 7.2 x 2.5mm	
C12	47n	Film capacitor, 7.2 x 2.5mm	
C13	220n	Film capacitor, 7.2 x 5.0mm	
C14	47n	Film capacitor, 7.2 x 2.5mm	
C15	470n	Film capacitor, 7.2 x 5.0mm	
C16	220n	Film capacitor, 7.2 x 5.0mm	
C17	4n7	Film capacitor, 7.2 x 2.5mm	
		Continued on next page...	



PedalPCB Bad Mamma Jamma Distortion


Parts List (Page 2 of 2)


[illegible]



Bad Mamma Jamma Distortion


Schematic Diagram

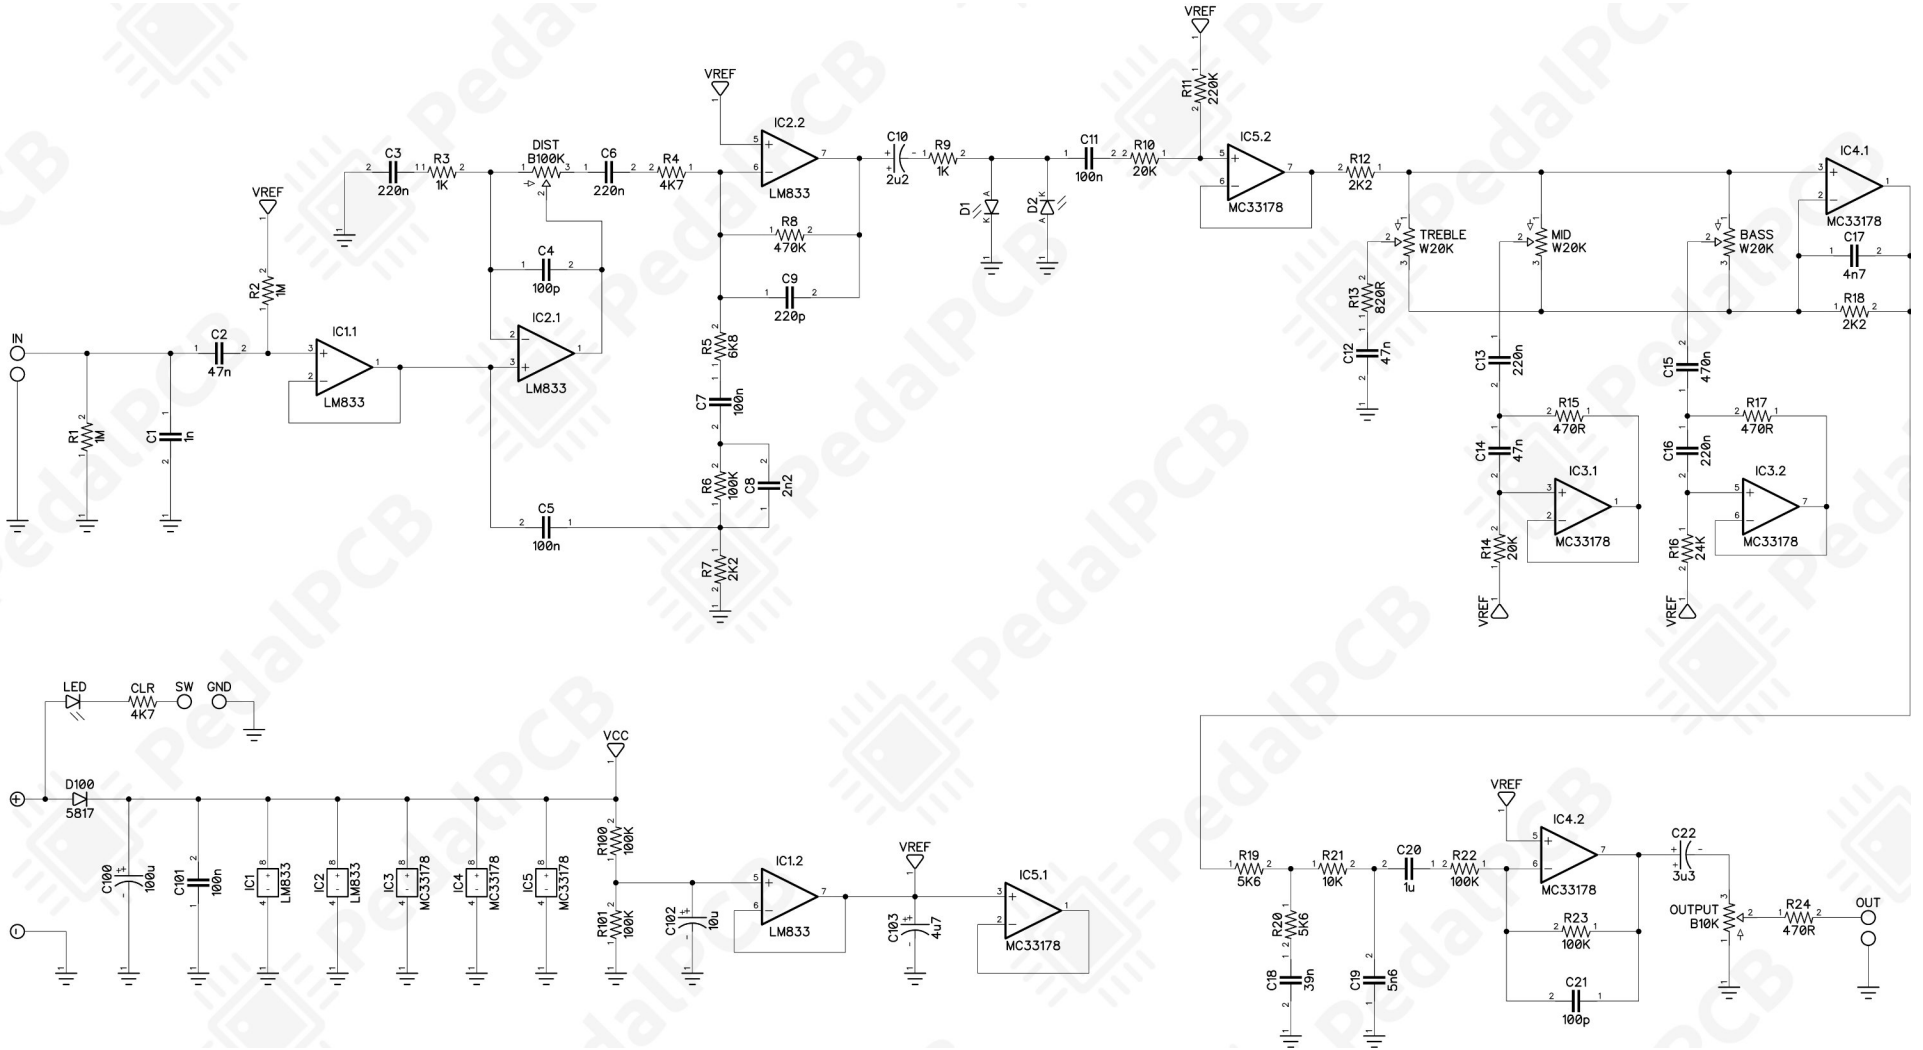




PedalPCB Bad Mamma Jamma Distortion

Wiring Diagram

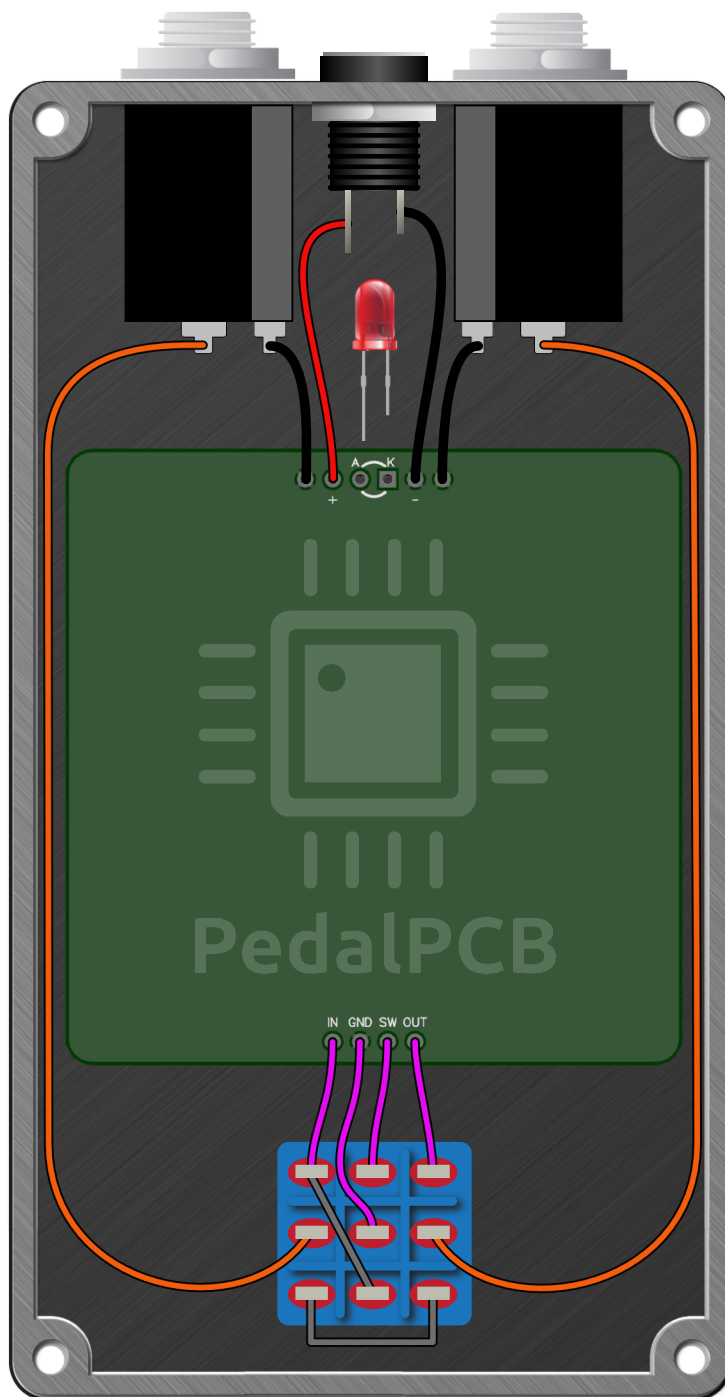



PedalPCB Bad Mamma Jamma Distortion

Drill Template
125B Enclosure

