




PedalPCB

Gauss Drive

Revision 01.23.20

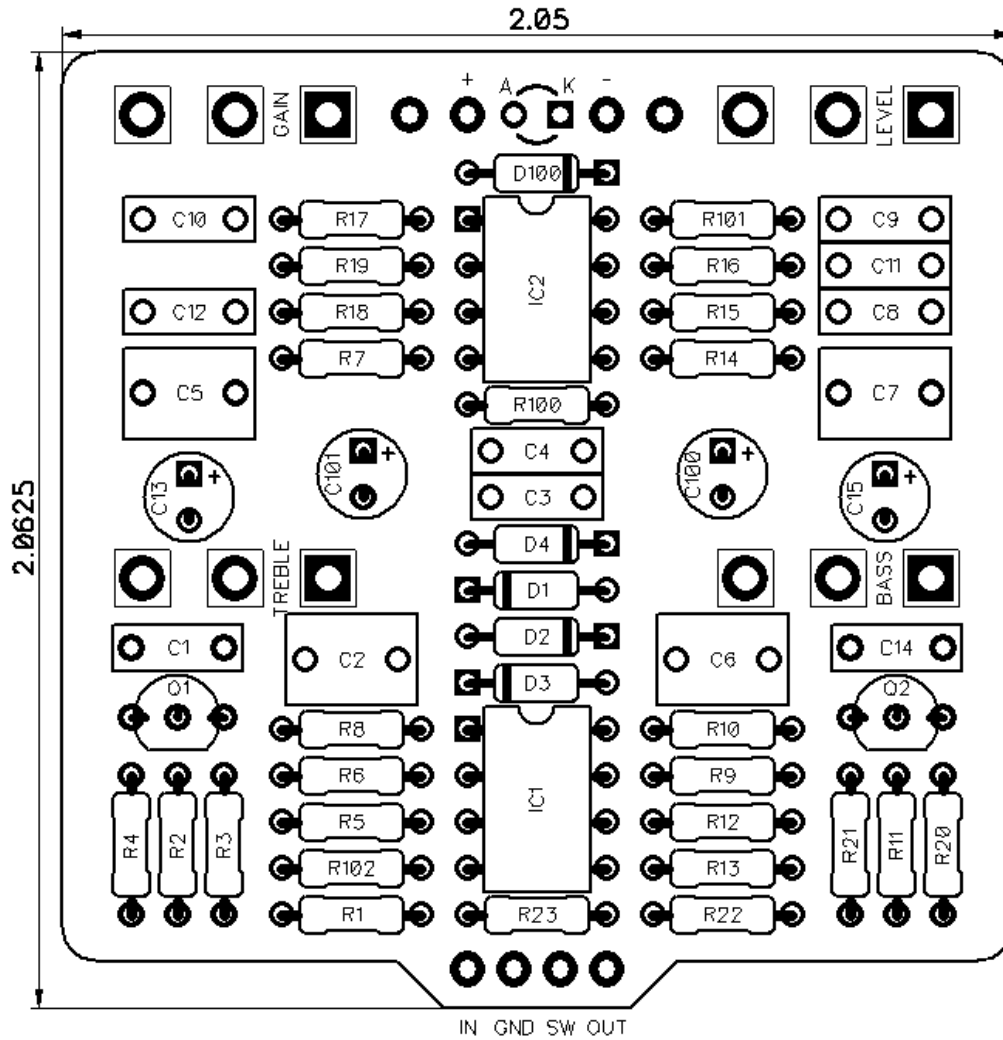

Controls

- Level
- Gain
- Bass
- Treble

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

Gauss Drive

Parts List

RESISTORS (1/4W)

R1 1M
 R2 1K
 R3 510K
 R4 10K
 R5 10K
 R6 10K
 R7 4K7
 R8 1K
 R9 1K
 R10 19K
 R11 220R
 R12 1K8
 R13 10K
 R14 43K
 R15 47K
 R16 4K7
 R17 4K7
 R18 33K
 R19 10K
 R20 510K
 R21 10K
 R22 470R
 R23 100K
 R100 4K7
 R101 10K
 R102 10K

CAPACITORS

C1 22n
 C2 1u
 C3 51p
 C4 47n
 C5 220n
 C6 220n
 C7 1u
 C8 180p
 C9 4n7
 C10 4n7
 C11 33n
 C12 33n
 C13 10u
 C14 100n
 C15 10u
 C100 47u
 C101 47u

INTEGRATED CIRCUITS

IC1 JRC4558
 IC2 JRC4558

TRANSISTORS

Q1 2SC1815
 Q2 2SC1815

DIODES

D1 1N4448
 D2 1N4448
 D3 1N4448
 D4 1N4448
 D100 1N5817

POTENTIOMETERS

LEVEL B100K
 GAIN B1M
 BASS B50K
 TREBLE B50K

Gauss Drive

Wiring Diagram



Gauss Drive

Drill Template
125B Enclosure

