


PedalPCB.com

Muroidea

Revision 11.05.17

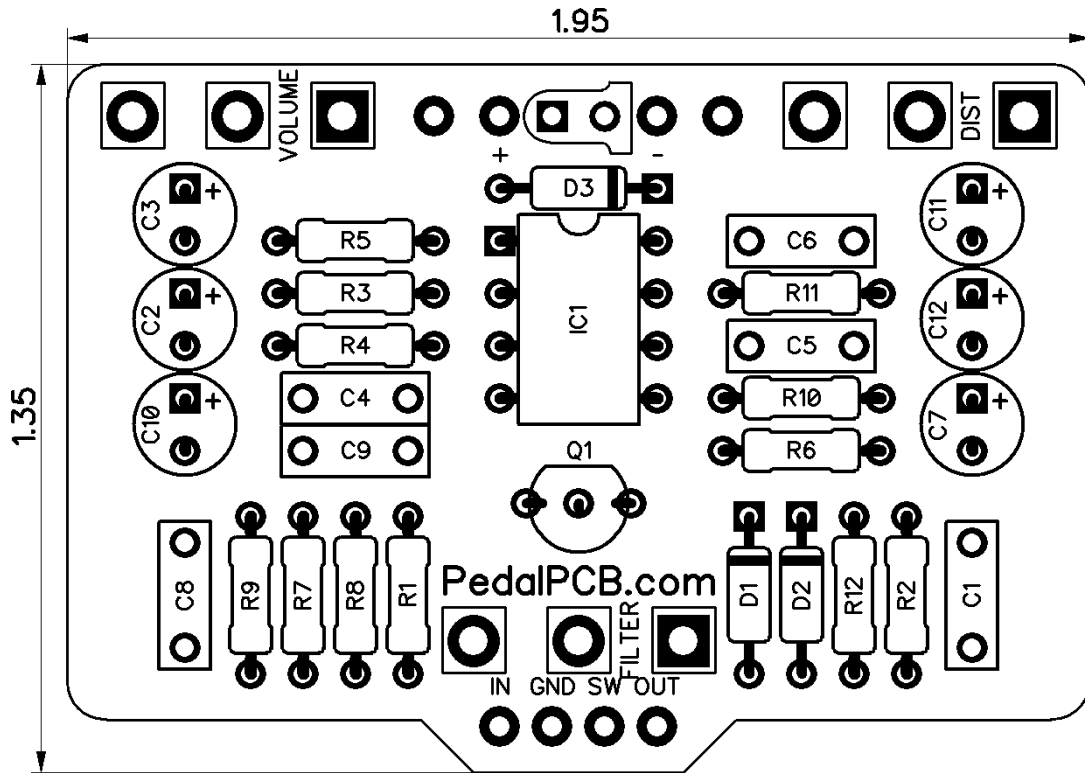

Resistors

R1	1M
R2	1M
R3	560
R4	1K
R5	47
R6	1K
R7	1K5
R8	1M
R9	10K
R10	4K7
R11	100K
R12	100K

Capacitors

C1	22nF
C2	4.7uF
C3	2.2uF
C4	1nF
C5	100pF
C6	30pF
C7	4.7uF
C8	3.3nF
C9	22nF
C10	1uF
C11	100uF
C12	1uF


Semiconductors

IC1	LM308
Q1	2N5458
D1	1N914
D2	1N914
D3	1N5817
LED	3mm Red LED


Potentiometers

DIST	A100K
FILTER	A100K
VOLUME	A100K

Muroidea

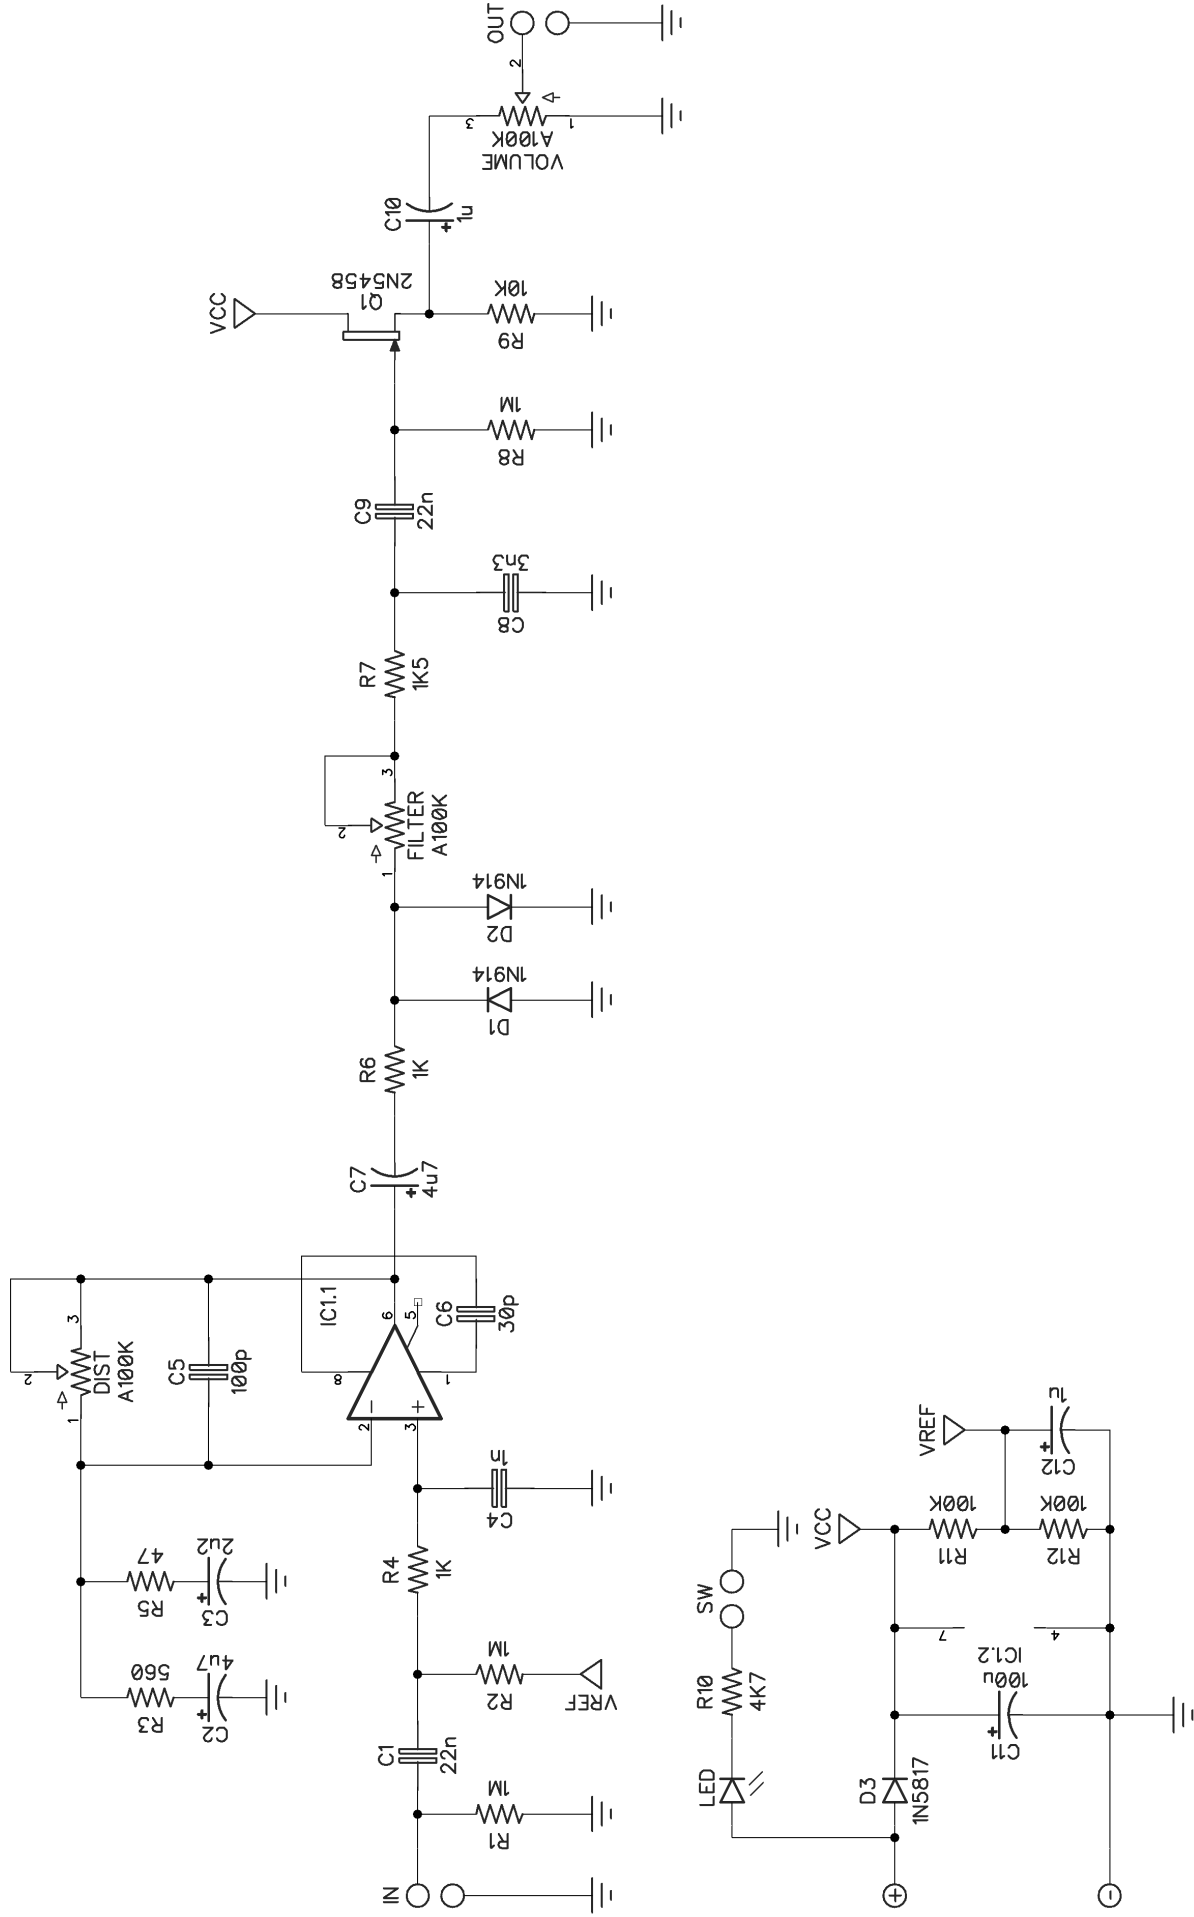

Wiring Diagram

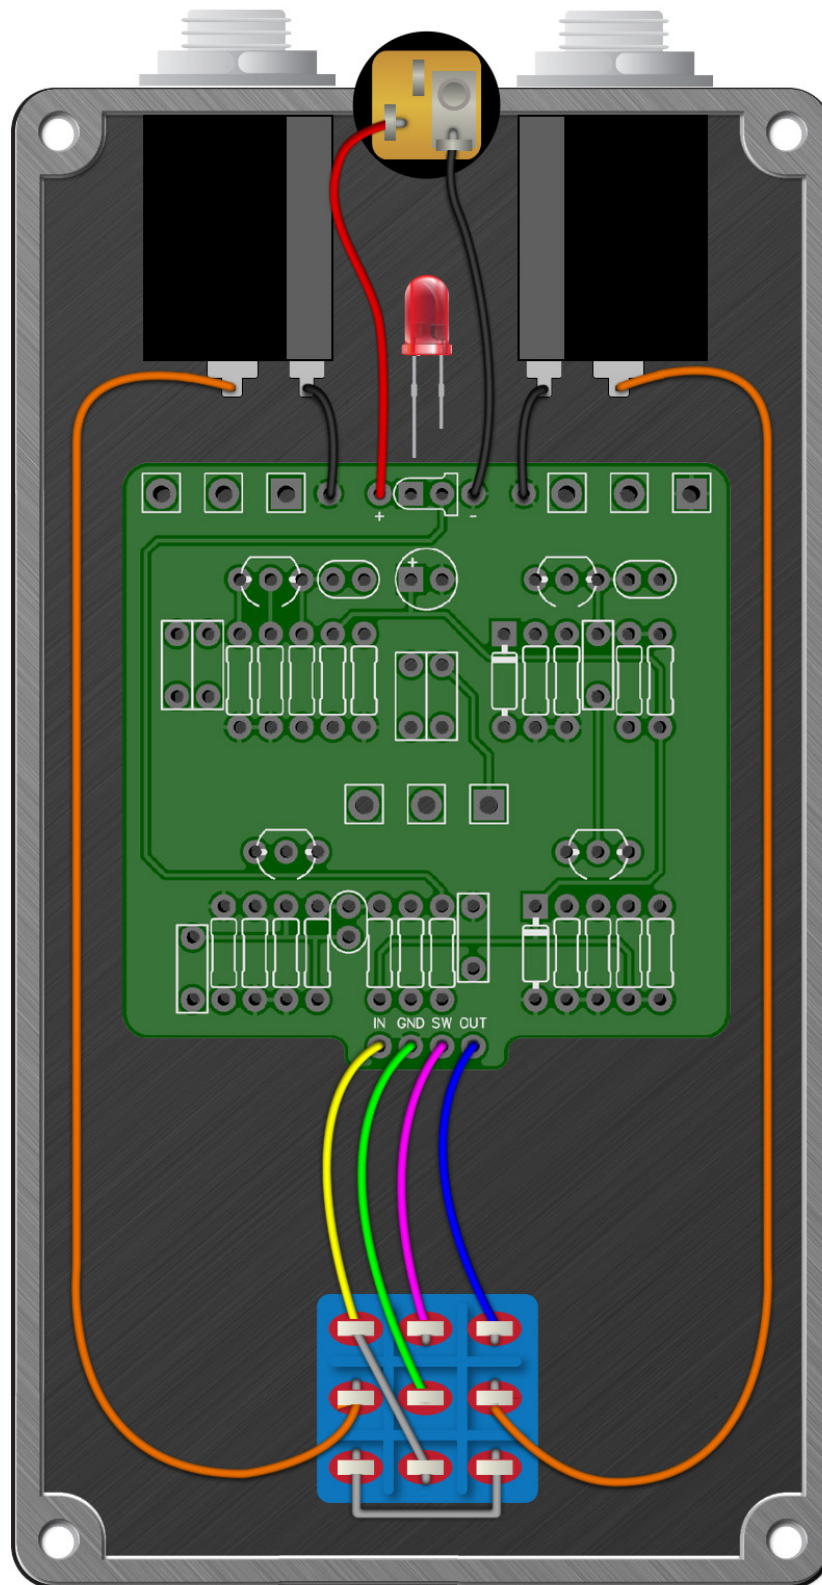

Drill Template

4S125B enclosure with top mounted jacks

