


PedalPCB

Narcissus Overdrive

Revised 8/9/21

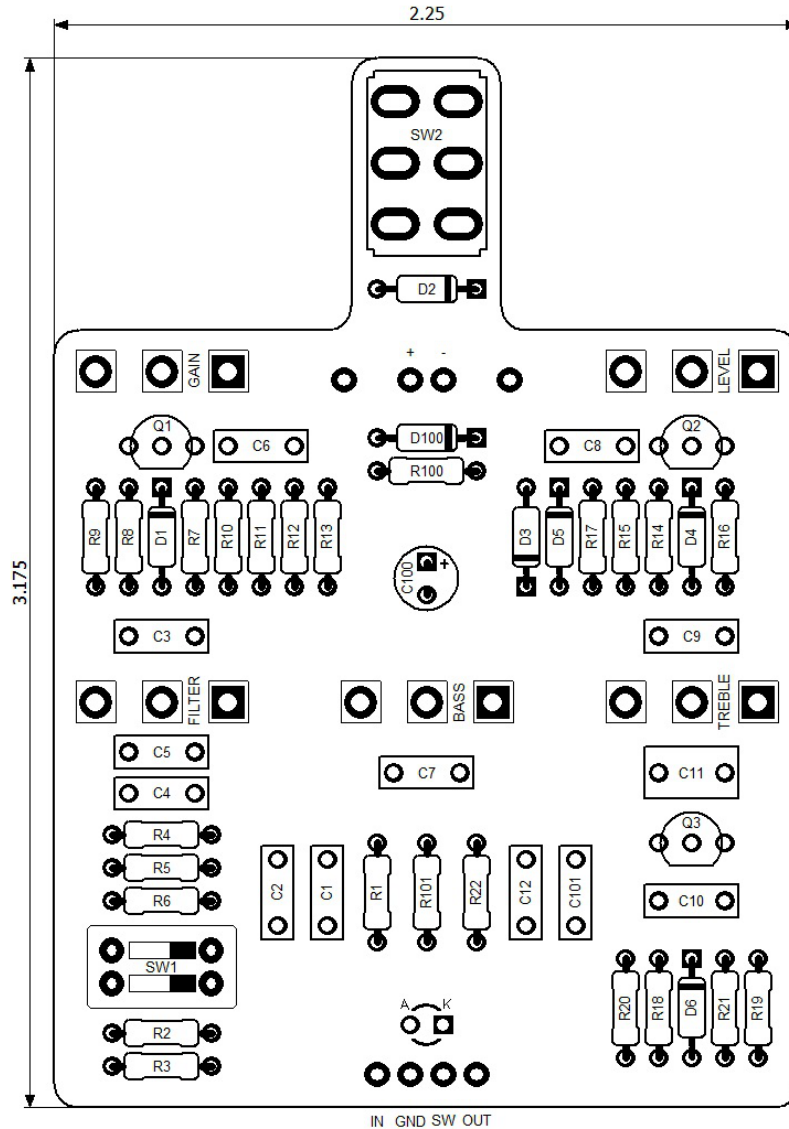

CONTROLS AND FEATURES

- Level
- Gain
- Treble
- Bass
- Filter
- Gain Range (Toggle Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	22K	Resistor, 1/4W	
R3	1K	Resistor, 1/4W	
R4	20K	Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	5K1	Resistor, 1/4W	
R7	20K	Resistor, 1/4W	
R8	1M	Resistor, 1/4W	
R9	1M	Resistor, 1/4W	
R10	5K1	Resistor, 1/4W	
R11	1K5	Resistor, 1/4W	
R12	200R	Resistor, 1/4W	
R13	27K	Resistor, 1/4W	
R14	22R	Resistor, 1/4W	
R15	10K	Resistor, 1/4W	
R16	22R	Resistor, 1/4W	
R17	30K	Resistor, 1/4W	
R18	1M	Resistor, 1/4W	
R19	1M	Resistor, 1/4W	
R20	4K7	Resistor, 1/4W	
R21	470R	Resistor, 1/4W	
R22	1K	Resistor, 1/4W	
R100	200R	Resistor, 1/4W	
R101	4K7	Resistor, 1/4W	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	10n	Film capacitor, 7.2 x 2.5mm	
C3	10n	Film capacitor, 7.2 x 2.5mm	
C4	10n	Film capacitor, 7.2 x 2.5mm	
C5	6n8	Film capacitor, 7.2 x 2.5mm	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	6n8	Film capacitor, 7.2 x 2.5mm	
C8	100n	Electrolytic capacitor, 5mm	
C9	3n3	Film capacitor, 7.2 x 2.5mm	
C10	3n3	Film capacitor, 7.2 x 2.5mm	
C11	220n	Film capacitor, 7.2 x 5.0mm	
C12	560p	Ceramic capacitor	
C100	100u	Electrolytic capacitor, 5mm	
C101	100n	Film capacitor, 7.2 x 2.5mm	
D1	9V1	Zener diode 1/2W, 9.1V	
D2	1N4001	Rectifier diode, DO-41	
D3	1N914	Signal diode, DO-35	
D4	9V1	Zener diode 1/2W, 9.1V	
D5	1N914	Signal diode, DO-35	
D6	9V1	Zener diode 1/2W, 9.1V	
D100	1N5817	Schottky diode, DO-41	
		<i>Continued on next page...</i>	



Narcissus Overdrive

Parts List (Page 2 of 2)

[illegible]



Schematic Diagram

