


PedalPCB

Pacifier

Revision 01.27.19

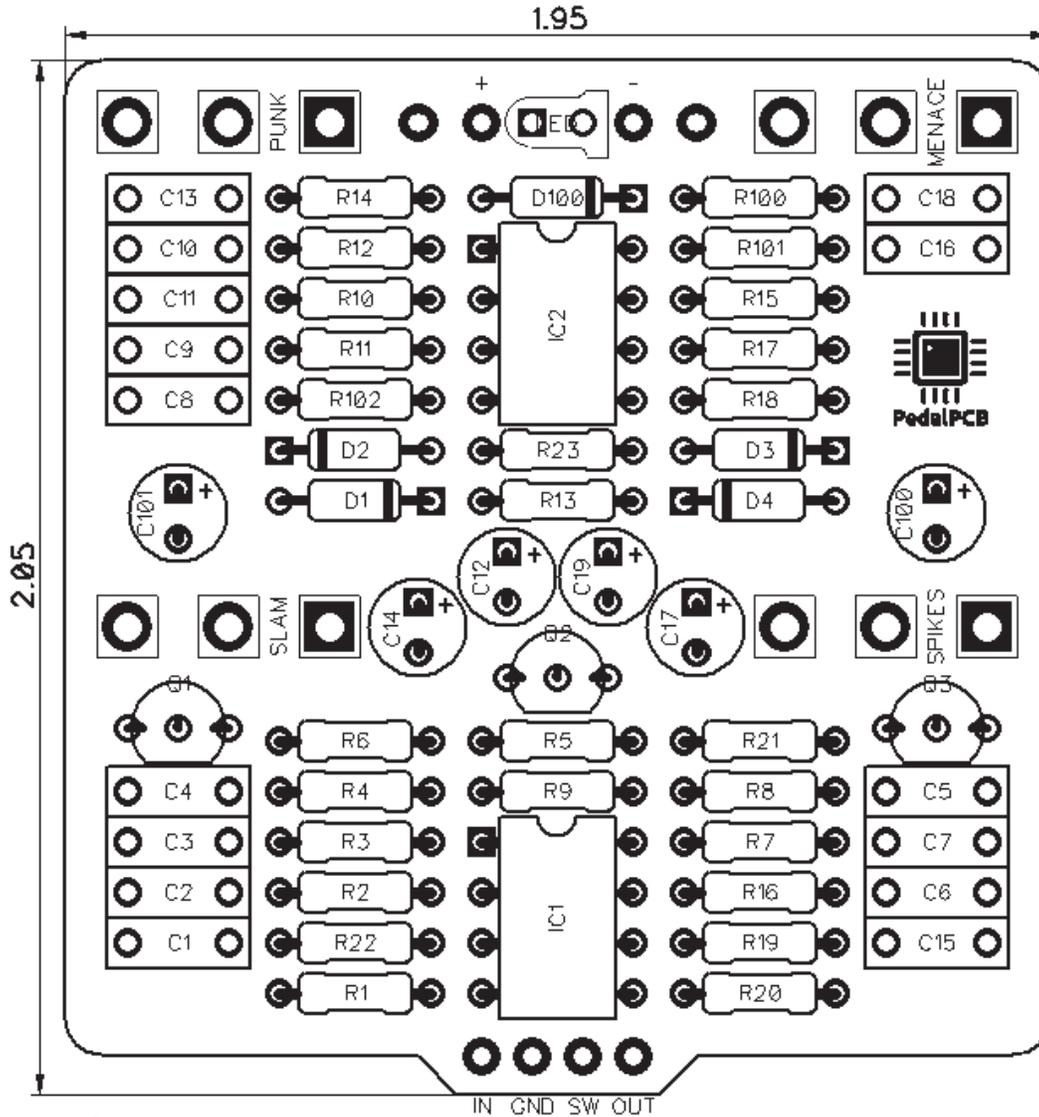

Controls

- **Menace** - Controls overall output volume
- **Punk** - Controls mix of fuzz / overdrive
- **Slam** - Controls amount of overdrive
- **Spikes** - Controls tone

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 1M
R2 10K
R3 2K
R4 22M
R5 10K
R6 1M
R7 220K
R8 1M
R9 22M
R10 1K
R11 470K
R12 1M
R13 4K7
R14 1K
R15 22K
R16 47K
R17 4K7
R18 10K
R19 1M
R20 100R
R21 220K
R22 470K
R23 1M
R100 4K7
R101 10K
R102 10K

CAPACITORS

C1 47n
C2 120p
C3 22n
C4 120p
C5 22n
C6 120p
C7 22n
C8 47n
C9 10n
C10 25p
C11 56n
C12 4u7
C13 1n
C14 4u7
C15 50p
C16 3n3
C17 4u7
C18 220n
C19 4u7
C100 330u
C101 330u

TRANSISTORS

Q1 2N5088
Q2 2N5088
Q3 2N5088

INTEGRATED CIRCUITS

IC1 KA4558
IC2 KA4558

DIODES

D1 1N4148
D2 1N4148
D3 1N4148
D4 1N4148
D100 1N5817

POTENTIOMETERS

MENACE W100K
PUNK W100K
SLAM C500K
SPIKES W100K

