




PedalPCB

Parasite Wah

Revision 12.25.19

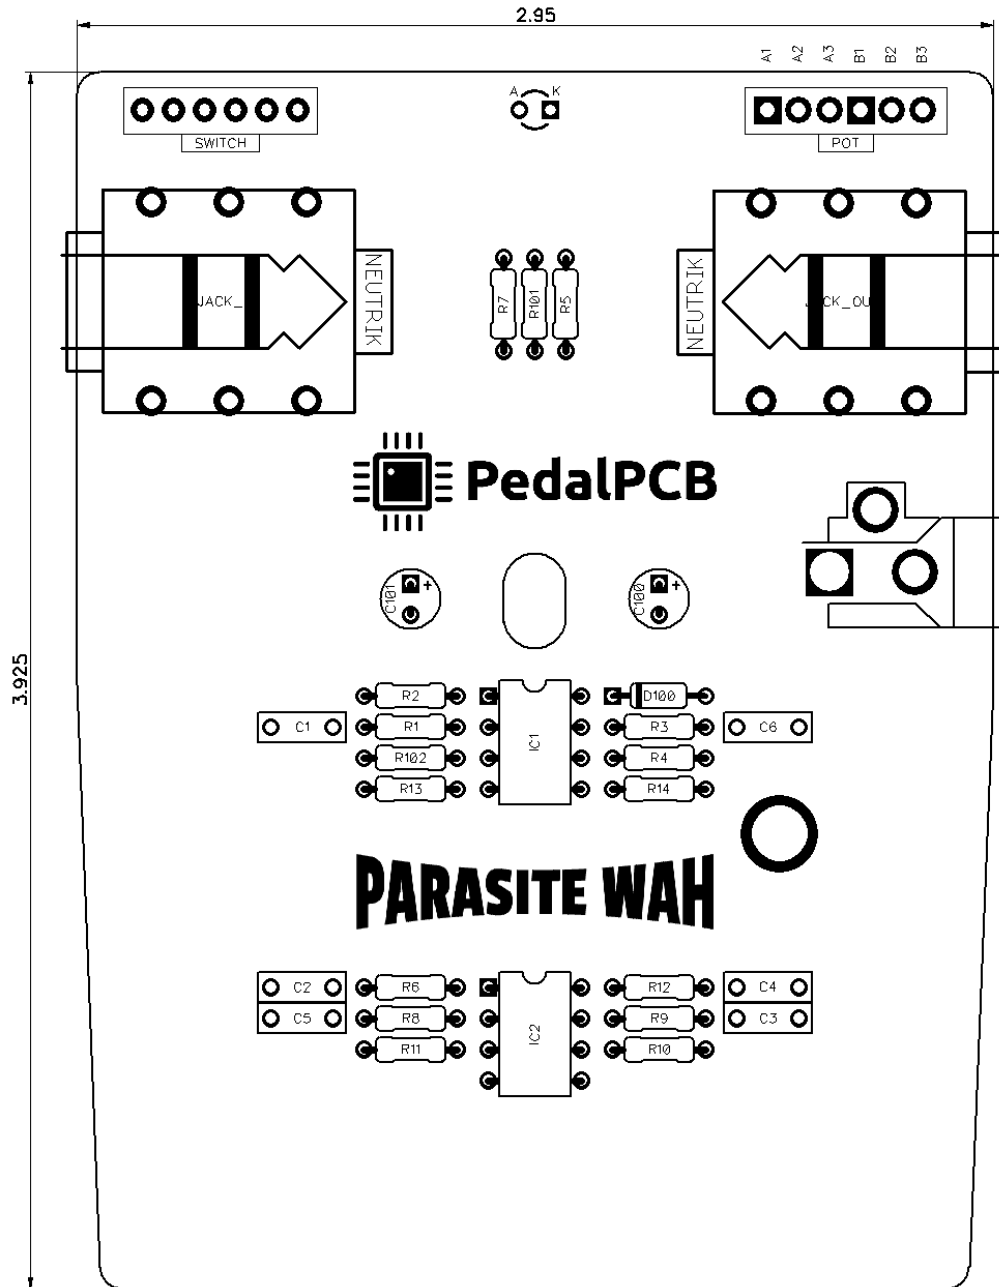

Controls

- Wah

RESISTORS (1/4W)

R1 47K
R2 650K
R3 22K
R4 10K
R5 200R
R6 1K
R7 200R
R8 10K
R9 10K
R10 1K
R11 16K
R12 200R
R13 1M
R14 10K
R101 4K7
R102 22K

CAPACITORS

C1 10n
C2 68n
C3 68n
C4 100n
C5 1n
C6 100n
C100 33u
C101 33u

INTEGRATED CIRCUITS

IC1 MC1458
IC2 MC1458

DIODES

D100 1N5817

POTENTIOMETERS

POT A10K DUAL

JACKS

IN 1/4" TRS PCB Mounted
OUT 1/4" TRS PCB Mounted
DC 2.1mm PCB Mounted

FOOTSWITCH

3PDT Latching Footswitch

JACKS (PCB MOUNTED)

DC_JACK 2.1mm Barrel Style DC jack
<https://www.taydaelectronics.com/dc-power-jack-2-1mm-barrel-type-pcb-mount.html>

JACK_IN 6.35mm 1/4" PCB mounted jack
JACK_OUT <https://www.taydaelectronics.com/6-35mm-1-4-stereo-insulated-switched-socket-jack-pcb.html>

ENCLOSURE

Designed for a Crybaby-style enclosure with DC jack
<http://smallbear-electronics.mybigcommerce.com/expression-pedal-shell-kit/>

Parasite Wah

