




PedalPCB

Park and Ride

Revision 09.01.19

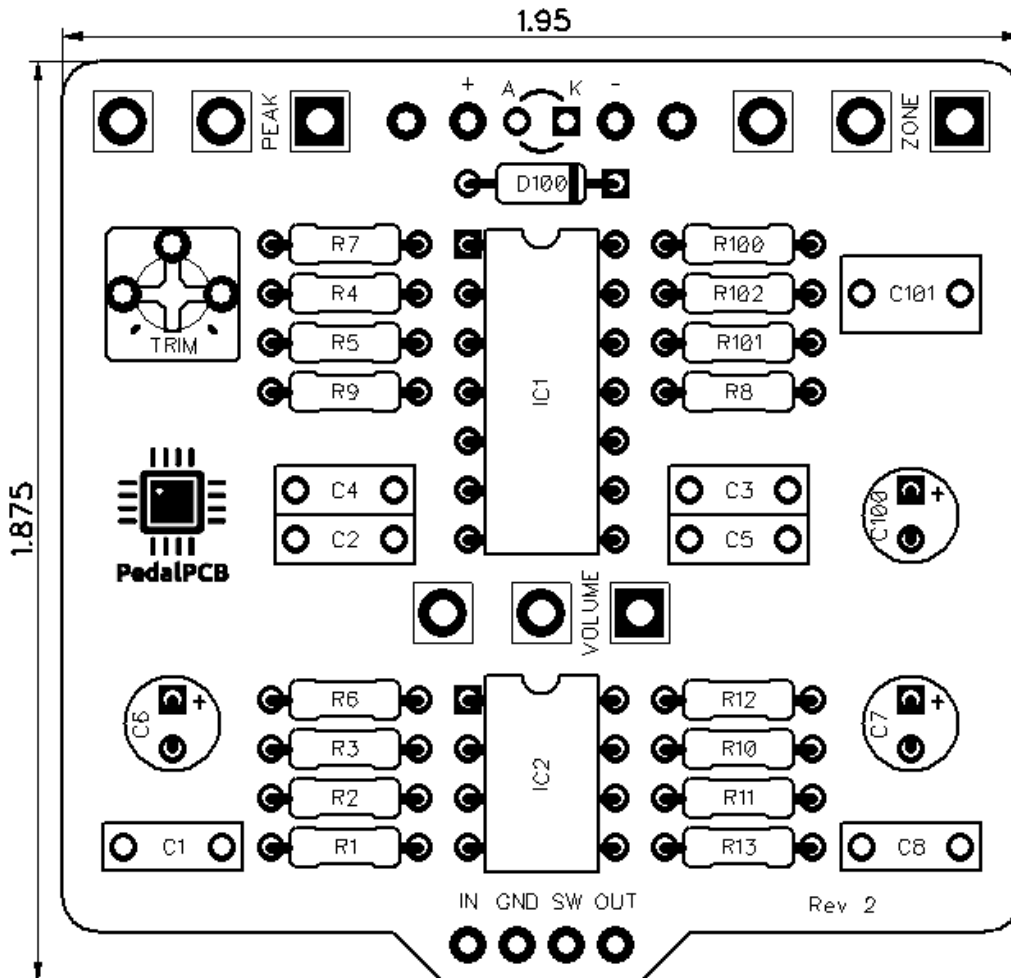

Controls

- Volume
- Zone
- Peak

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

Park and Ride

Parts List

RESISTORS (1/4W)

R1 3M9
R2 1M
R3 15K
R4 10K
R5 1K5
R6 10K
R7 6K8
R8 10K
R9 47K
R10 47K
R11 4K7
R12 2K2
R13 20K
R100 4K7
R101 1M
R102 1M

CAPACITORS

C1 10n
C2 3n3
C3 33n
C4 1n
C5 270p
C6 4u7
C7 1u
C8 1n
C100 220u
C101 330n

INTEGRATED CIRCUITS

IC1 TL074
IC2 TL072

DIODES

D100 1N5817


POTENTIOMETERS

ZONE C10K
PEAK C500K
VOLUME C500K

TRIM POTS

TRIM 500K

Park and Ride

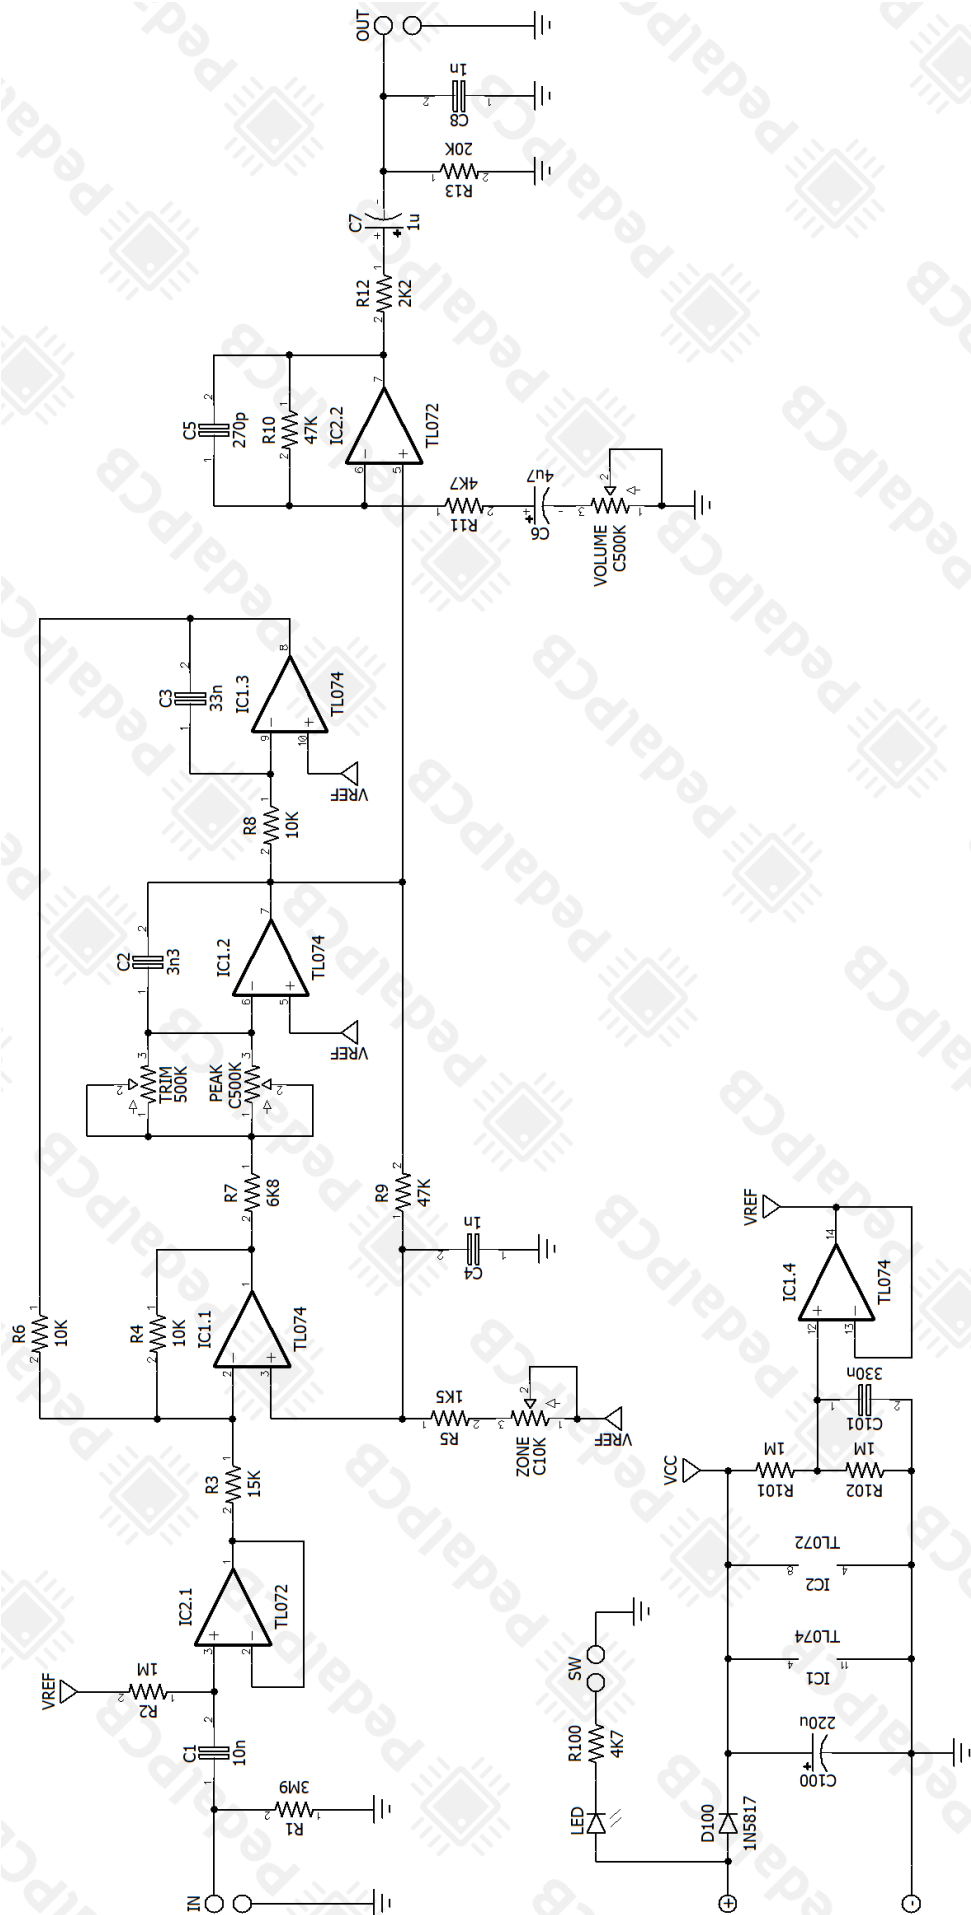

Park and Ride

Wiring Diagram



Park and Ride

Drill Template
125B enclosure with top mounted jacks

