

CONTROLS AND FEATURES

- Volume
- Gain
- Tone
- Fat


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.






Parts List (Page 1 of 1)

LOCATION	VALUE	ТҮРЕ	NOTES
R1	1M	Resistor, 1/4W	
R2	1K	Resistor, 1/4W	
R3	10K	Resistor, 1/4W	
R4	2K2	Resistor, 1/4W	
R5	1K	Resistor, 1/4W	
R6	100K	Resistor, 1/4W	
R7	10K	Resistor, 1/4W	
R8	1M	Resistor, 1/4W	
R9	4M7	Resistor, 1/4W	
R11	100K	Resistor, 1/4W	
R12	10K	Resistor, 1/4W	
R13	1K	Resistor, 1/4W	
R14	10K	Resistor, 1/4W	
R15	3K9	Resistor, 1/4W	
R16	22K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	3n3	Film capacitor, 7.2 x 2.5mm	
C1 C2	3n3	Film capacitor, 7.2 x 2.5mm	
C3	22u	Electrolytic capacitor, 5mm	
C4	220n	Film capacitor, 7.2 x 5.0mm	
C3 C4 C5 C6 C7	10u	Electrolytic capacitor, 5mm	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	2u2	Electrolytic capacitor, 5mm	
C8	100n	Film capacitor, 7.2 x 2.5mm	
C9	10011 10n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
0100	1000		
D100	1N5817	Schottky diode, DO-41	
0100			
Q1	BC549B	BJT transistor, NPN TO-92	
Q2	BC549B	BJT transistor, NPN TO-92	
Q3	BC549B	BJT transistor, NPN TO-92	
	000400		
VOLUME	A100K	16mm right-angle PCB mount pot	Logarithmic taper, 100K
GAIN	A100K	16mm right-angle PCB mount pot	Logarithmic taper, 100K
TONE	B10K	16mm right-angle PCB mount pot	Linear taper, 10K
FAT	B100K	16mm right-angle PCB mount pot	Linear taper, 100K
	DIOON		

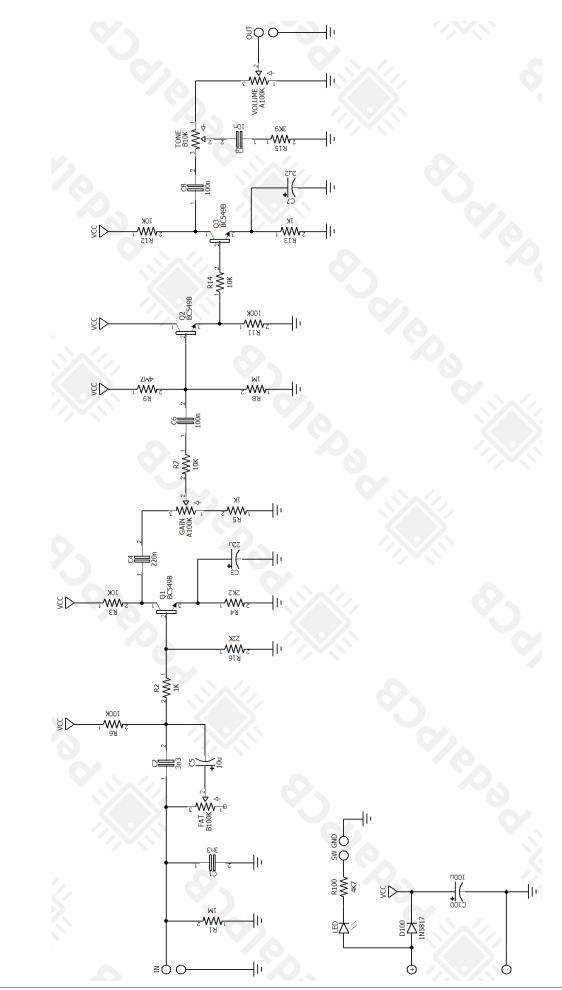





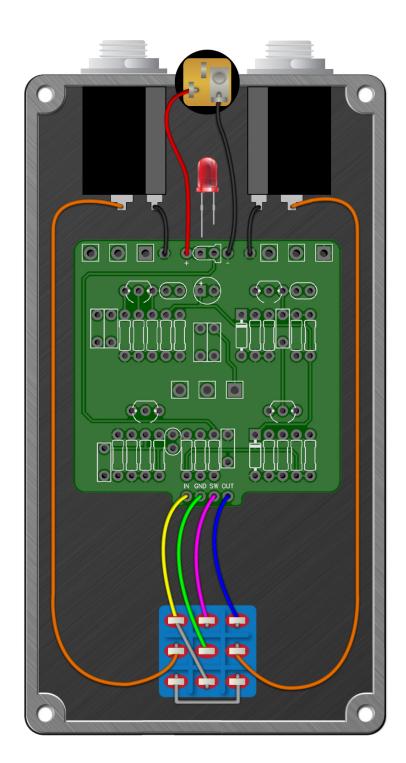





Drill Template 125B enclosure

