


PedalPCB.com

Pitch Witch

Revision 10.26.20

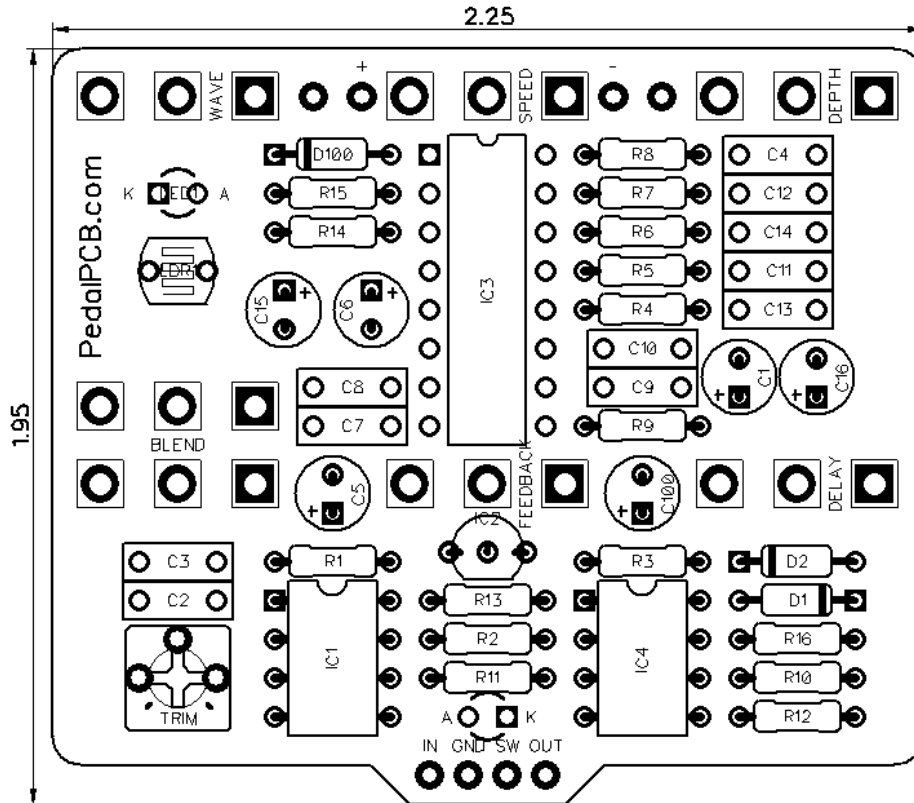

Resistors

R1	100K
R2	100K
R3	15K
R4	22K
R5	10K
R6	22K
R7	22K
R8	10K
R9	1K
R10	10K
R11	10K
R12	100K
R13	47K
R14	10K
R15	10K
R16	1K

Capacitors

C1	47uF
C2	10nF
C3	100nF
C4	100nF
C5	47uF
C6	47uF
C7	100nF
C8	100nF
C9	100nF
C10	100nF
C11	1nF
C12	1nF
C13	100nF
C14	100nF
C15	47uF
C16	1uF
C100	47uF


Semiconductors

IC1	LM386
IC2	L78L05
IC3	PT2399
IC4	JRC4558D
D1	1N4148
D2	1N4148
D100	1N5817
LDR1	1M LDR
LED1	5mm Yellow LED
LED	Indicator LED

Potentiometers

DELAY	B100K
SPEED	B1M
DEPTH	B100K
WAVE	B1K
BLEND	B50K DUAL
FEEDBACK	B50K
TRIM	100K Trim (3362P)

Pitch Witch

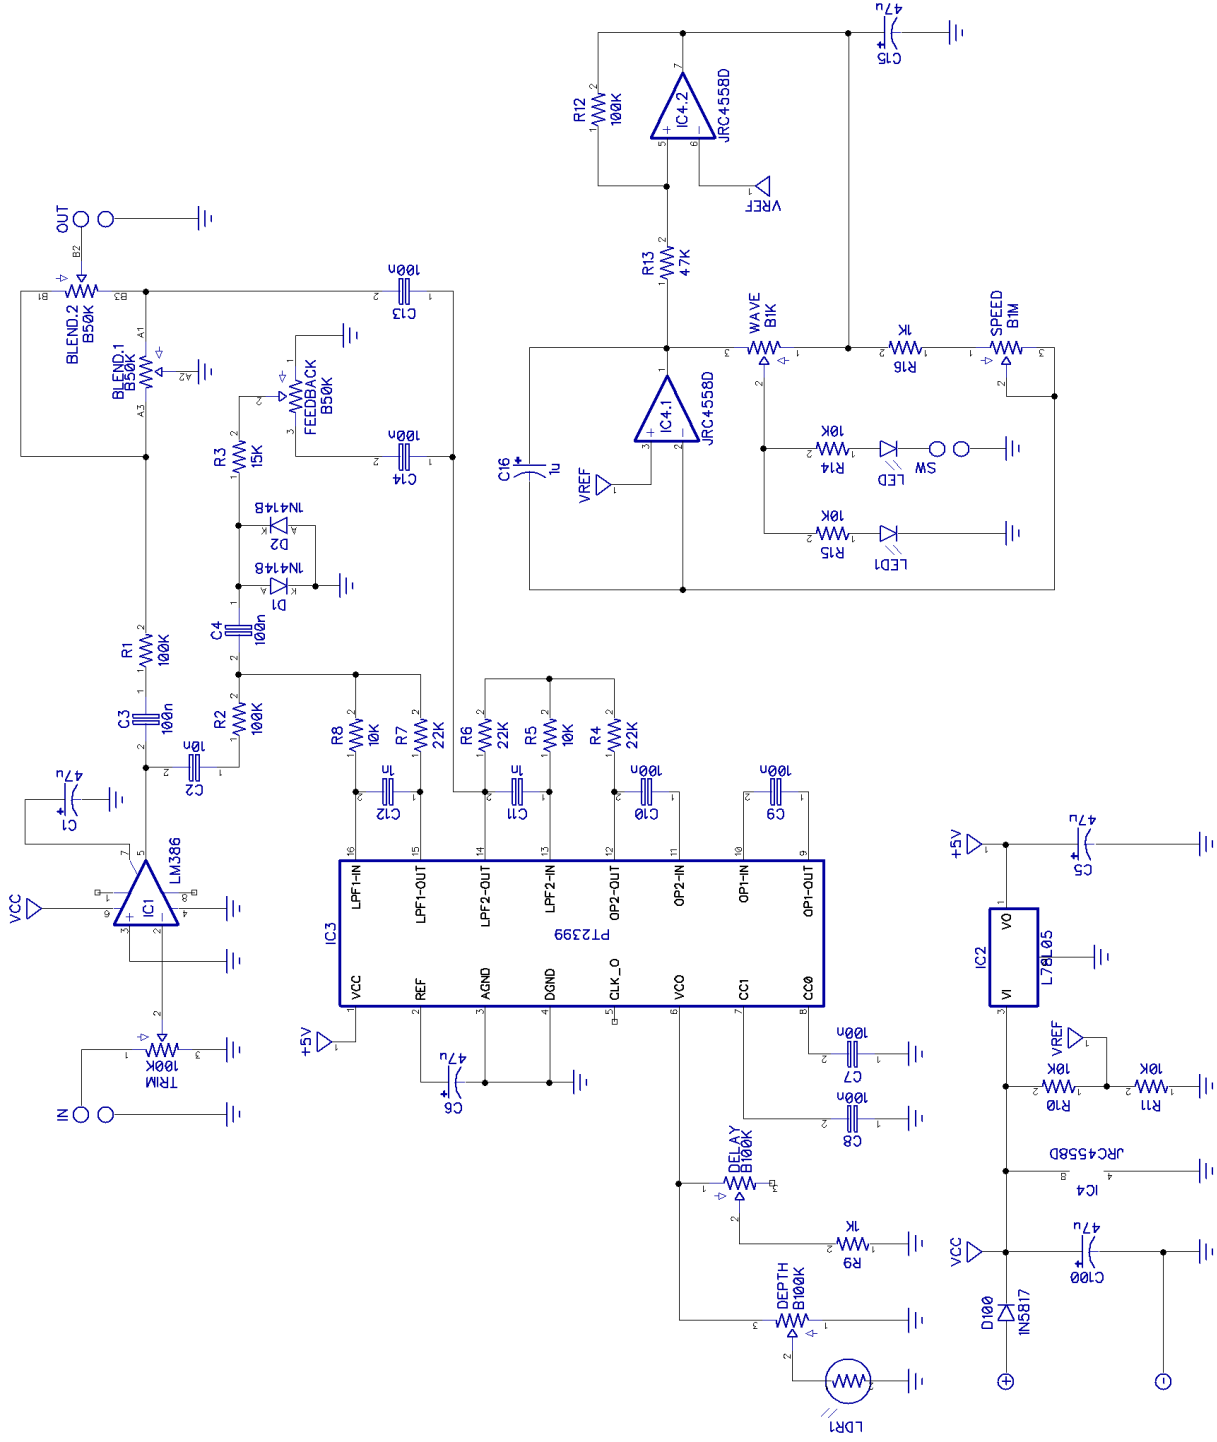

Wiring Diagram

