




# PedalPCB

## Seyfoam Overdrive

Revision 12.29.20

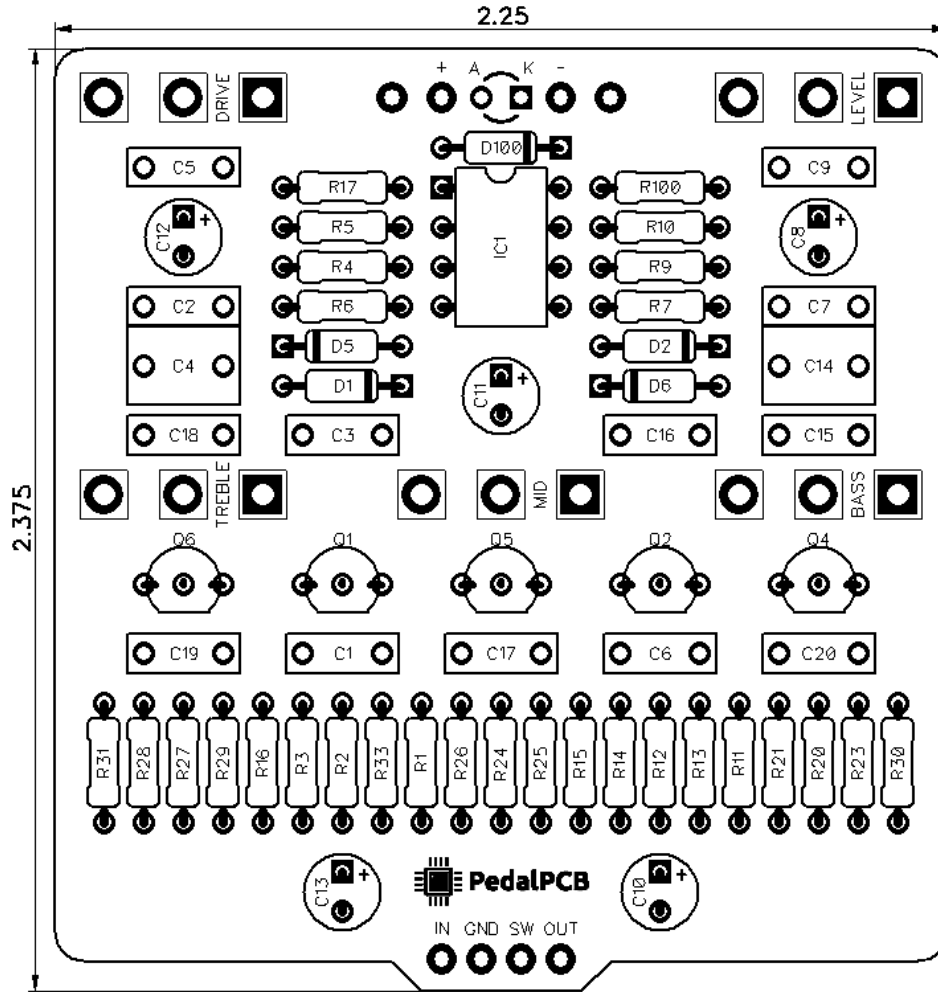

### Controls

- Level
- Drive
- Treble
- Mid
- Bass

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

# Seyfoam Overdrive

## Parts List

### RESISTORS (1/4W)

R1 1K  
R2 1M  
R3 10K  
R4 100K  
R5 3K3  
R6 470R  
R7 10K  
R9 10K  
R10 4K7  
R11 36K  
R12 1M  
R13 10K  
R14 1K  
R15 100K  
R16 47K  
R17 47K  
R20 180K  
R21 18K  
R23 1K8  
R24 100K  
R25 2K6  
R26 16K2  
R27 100K  
R28 2K6  
R29 16K2  
R30 150K  
R31 392K  
R33 1M  
R100 4K7

### CAPACITORS

C1 47n  
C2 220p  
C3 18n  
C4 470n  
C5 100p  
C6 4n7  
C7 680p  
C8 1u  
C9 47n  
C10 1u  
C11 47u  
C12 47u  
C13 10u  
C14 220n  
C15 47n  
C16 47n  
C17 3n3  
C18 18n  
C19 1n2  
C20 100n

### INTEGRATED CIRCUITS

IC1 MC33178

### TRANSISTORS

Q1 MPSA18  
Q2 MPSA18  
Q4 MPSA18  
Q5 MPSA18  
Q6 MPSA18


### DIODES

D1 1N4148  
D2 1N4148  
D5 1N4148  
D6 1N4148  
D100 1N5817

### POTENTIOMETERS

LEVEL B10K  
DRIVE A100K  
TREBLE B20K  
MID B20K  
BASS B20K

# Seyfoam Overdrive

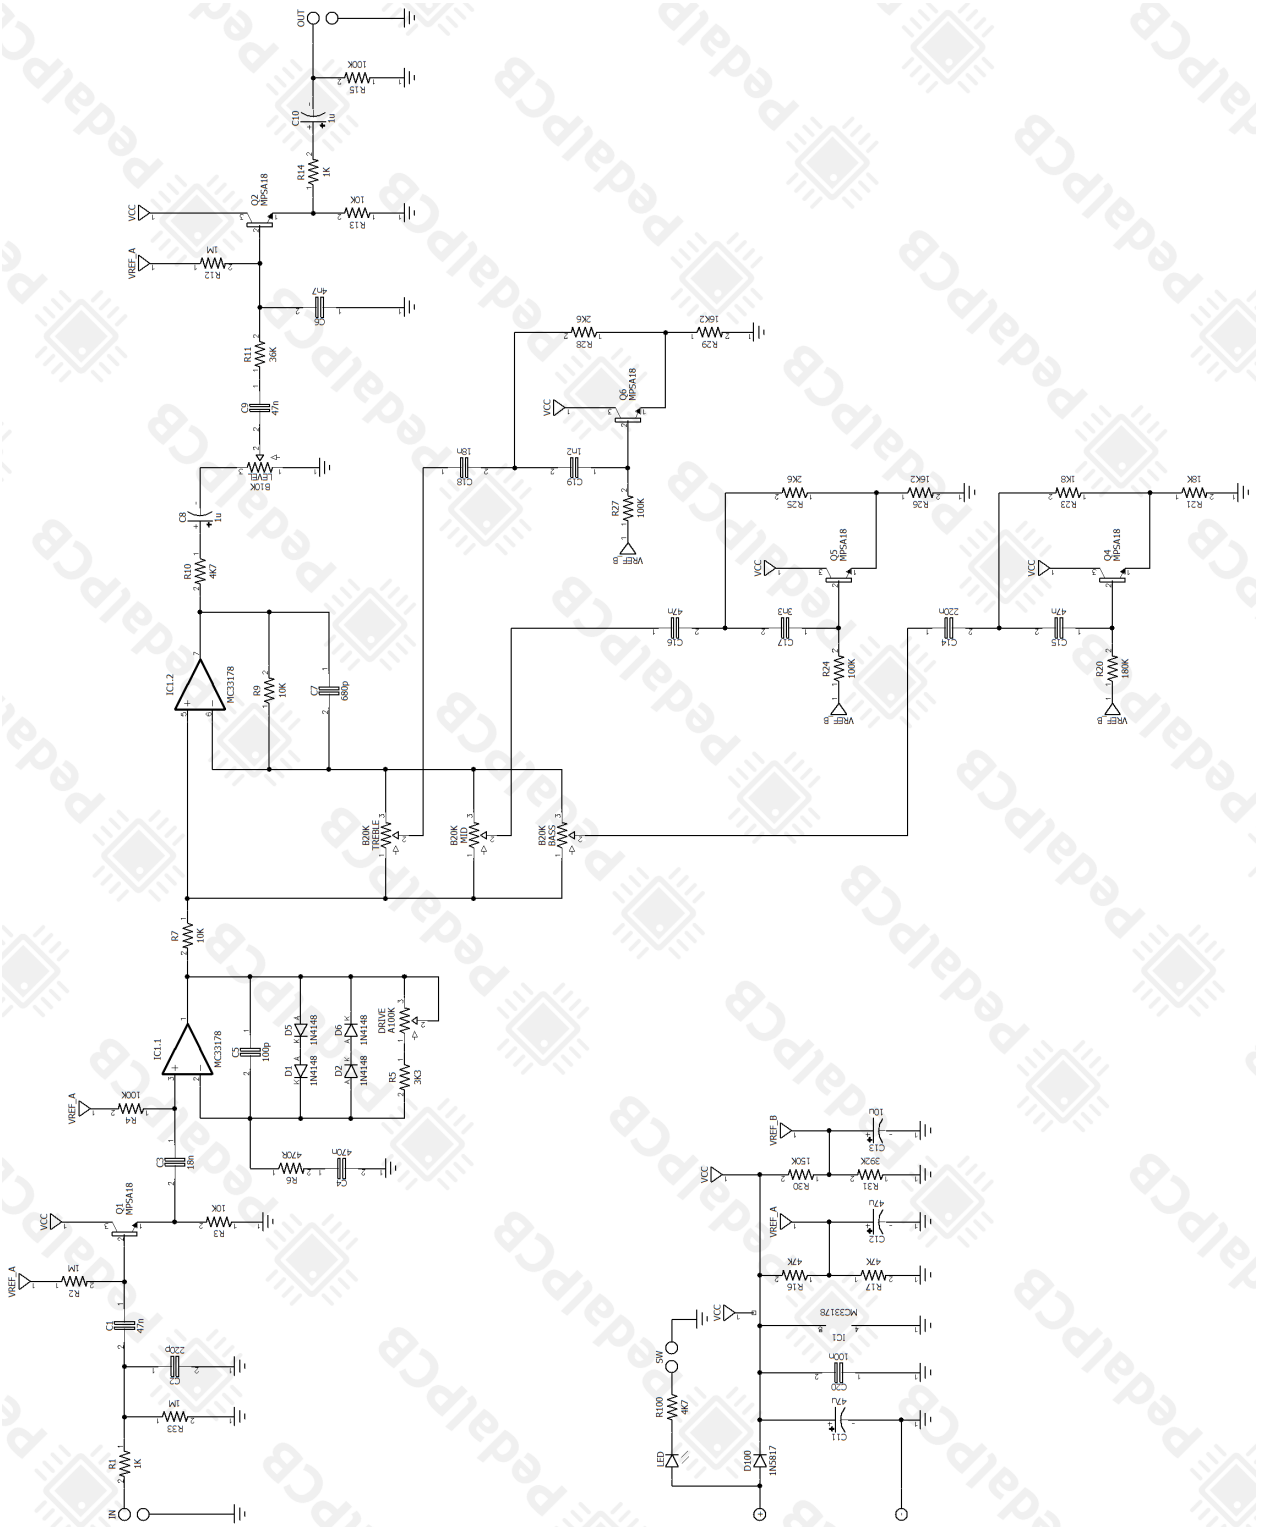

# Seyfoam Overdrive

Wiring Diagram



# Seyfoam Overdrive

Drill Template  
125B Enclosure

