

CONTROLS AND FEATURES

• Frequency (Wah Sweep)


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



Station Wah

Parts List (Page 1 of 1)


LOCATION	VALUE	ТҮРЕ	NOTES
R1	2M2	Resistor, 1/4W	
R2	1M8	Resistor, 1/4W	
R3	1K	Resistor, 1/4W	
R4	10K	Resistor, 1/4W	
R5	68K	Resistor, 1/4W	
R6	22K	Resistor, 1/4W	
R7	390R	Resistor, 1/4W	
R8	470K	Resistor, 1/4W	
R9	1K5	Resistor, 1/4W	
R10	82K	Resistor, 1/4W	
R11	33K	Resistor, 1/4W	
R12	470K	Resistor, 1/4W	
R13	1K	Resistor, 1/4W	
R14	10K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C2	22p	Ceramic capacitor	
C3	10n	Film capacitor, 7.2 x 2.5mm	
C2 C3 C4 C5	4u7	Electrolytic capacitor, 5mm	
C5	220n	Film capacitor, 7.2 x 5.0mm	
C6	10n	Film capacitor, 7.2 x 2.5mm	
C6 C7	220n	Film capacitor, 7.2 x 5.0mm	
C100	22011 220u	Electrolytic capacitor, 5mm	
0100	2200		
D100	1N5817	Schottky diode, DO-41	
0100			
Q1	MPSA18	BJT transistor, NPN TO-92	
Q2	MPSA18	BJT transistor, NPN TO-92	
Q3	MPSA18	BJT transistor, NPN TO-92	
L1	500mH	Fasel Inductor (500mH)	Alternate part: 42TM013
	5001111		
FREQ	B100K	16mm right-angle PCB mount pot	
	Brook		

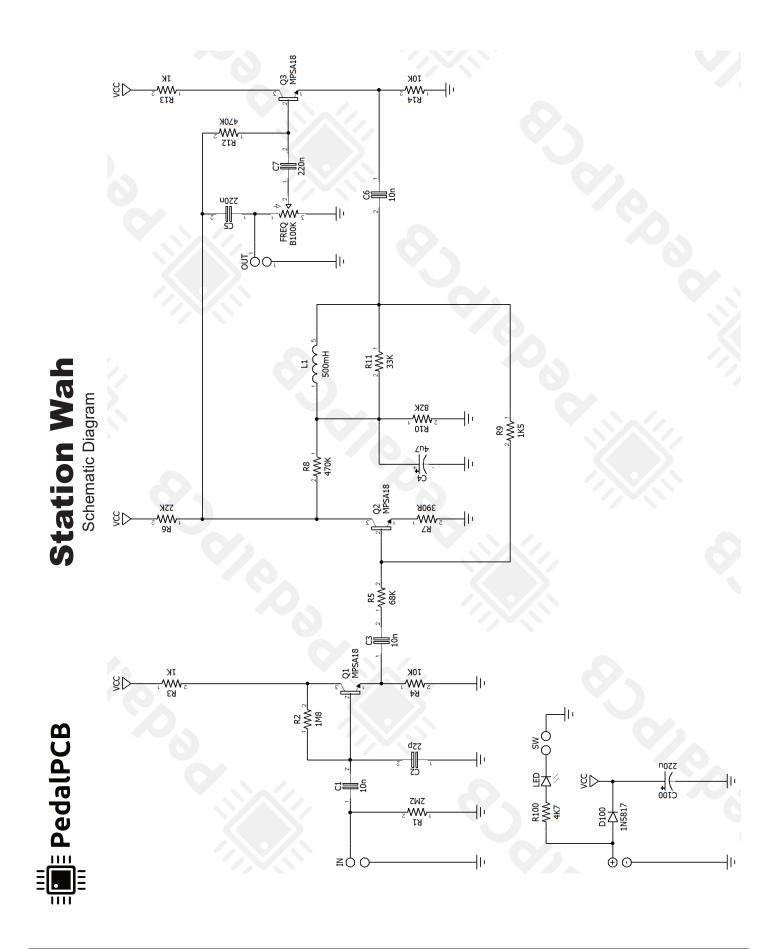





Wiring Diagram

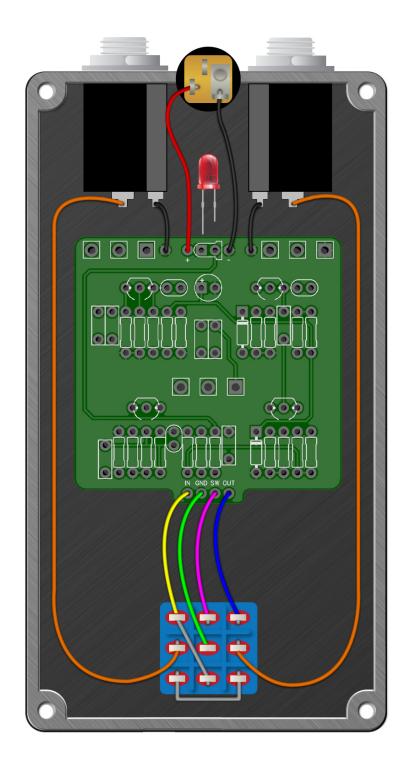



Station Wah

Drill Template 125B Enclosure

