


PedalPCB

Bellum MKII Fuzz

Revised 4/7/21

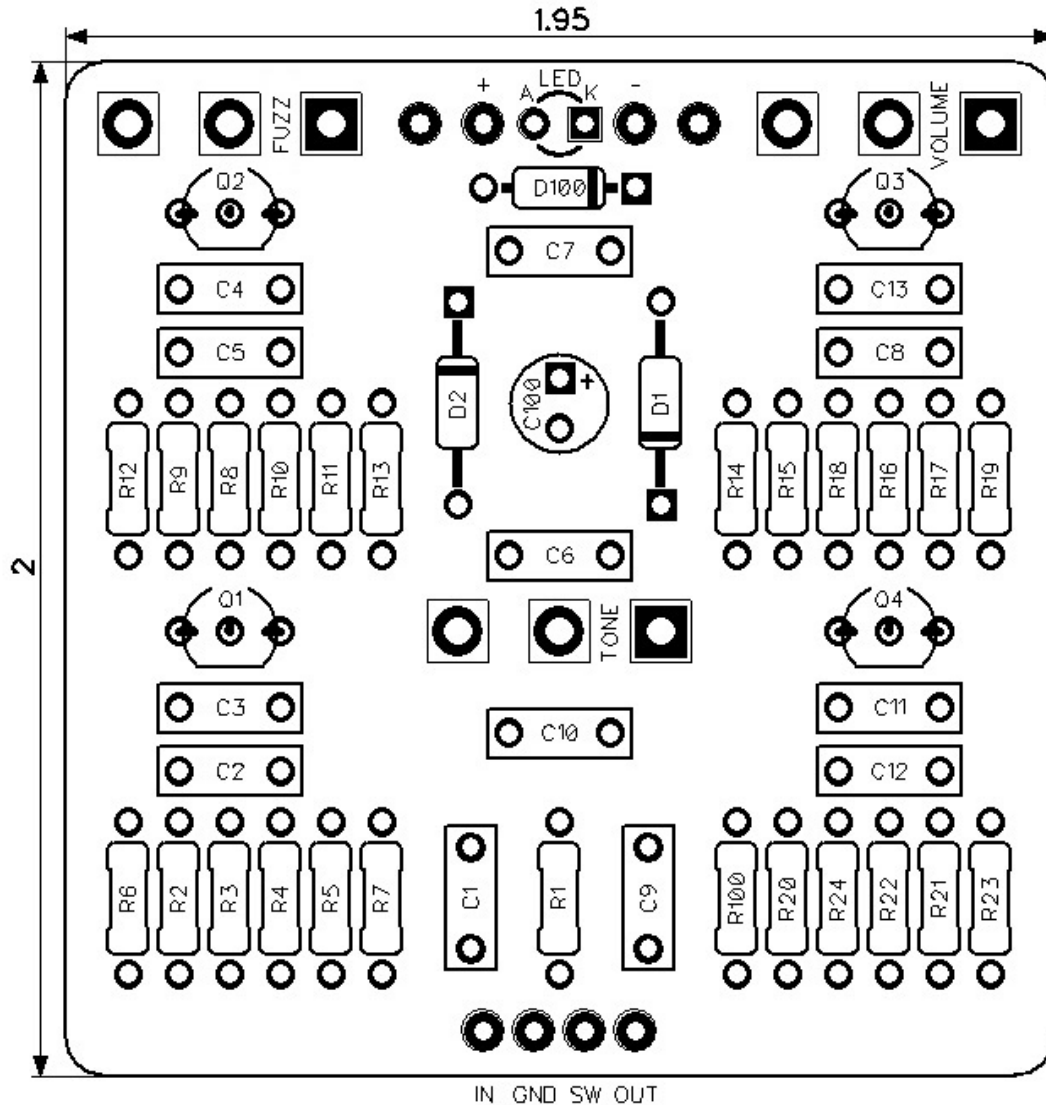

CONTROLS AND FEATURES

- Volume
- Tone
- Sustain

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



Bellum MKII Fuzz

Parts List (Page 1 of 2)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	1K5	Resistor, 1/4W	
R3	100K	Resistor, 1/4W	
R4	470K	Resistor, 1/4W	
R5	15K	Resistor, 1/4W	
R6	390R	Resistor, 1/4W	
R7	1K	Resistor, 1/4W	
R8	8K2	Resistor, 1/4W	
R9	100K	Resistor, 1/4W	
R10	470K	Resistor, 1/4W	
R11	15K	Resistor, 1/4W	
R12	100R	Resistor, 1/4W	
R13	8K2	Resistor, 1/4W	
R14	43K	Resistor, 1/4W	
R15	100K	Resistor, 1/4W	
R16	470K	Resistor, 1/4W	
R17	15K	Resistor, 1/4W	
R18	390R	Resistor, 1/4W	
R19	33K	Resistor, 1/4W	
R20	6K8	Resistor, 1/4W	
R21	430K	Resistor, 1/4W	
R22	100K	Resistor, 1/4W	
R23	10K	Resistor, 1/4W	
R24	2K2	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	470p	Ceramic capacitor	
C3	100n	Film capacitor, 7.2 x 2.5mm	
C4	100n	Film capacitor, 7.2 x 2.5mm	
C5	470p	Ceramic capacitor	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	100n	Film capacitor, 7.2 x 2.5mm	
C8	2n2	Film capacitor, 7.2 x 2.5mm	
C9	6n8	Film capacitor, 7.2 x 2.5mm	
C10	100n	Film capacitor, 7.2 x 2.5mm	
C11	680p	Ceramic capacitor	
C12	100n	Film capacitor, 7.2 x 2.5mm	
C13	100n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D1	1N34A	Germanium Diode	(1N34A, 1N270, D9E, etc)
D2	1N34A	Germanium Diode	(1N34A, 1N270, D9E, etc)
D100	1N5817	Schottky diode, DO-41	
		Continued on next page...	



Bellum MKII Fuzz

Parts List (Page 2 of 2)

[illegible]




Schematic Diagram



Bellum MKII Fuzz

Wiring Diagram

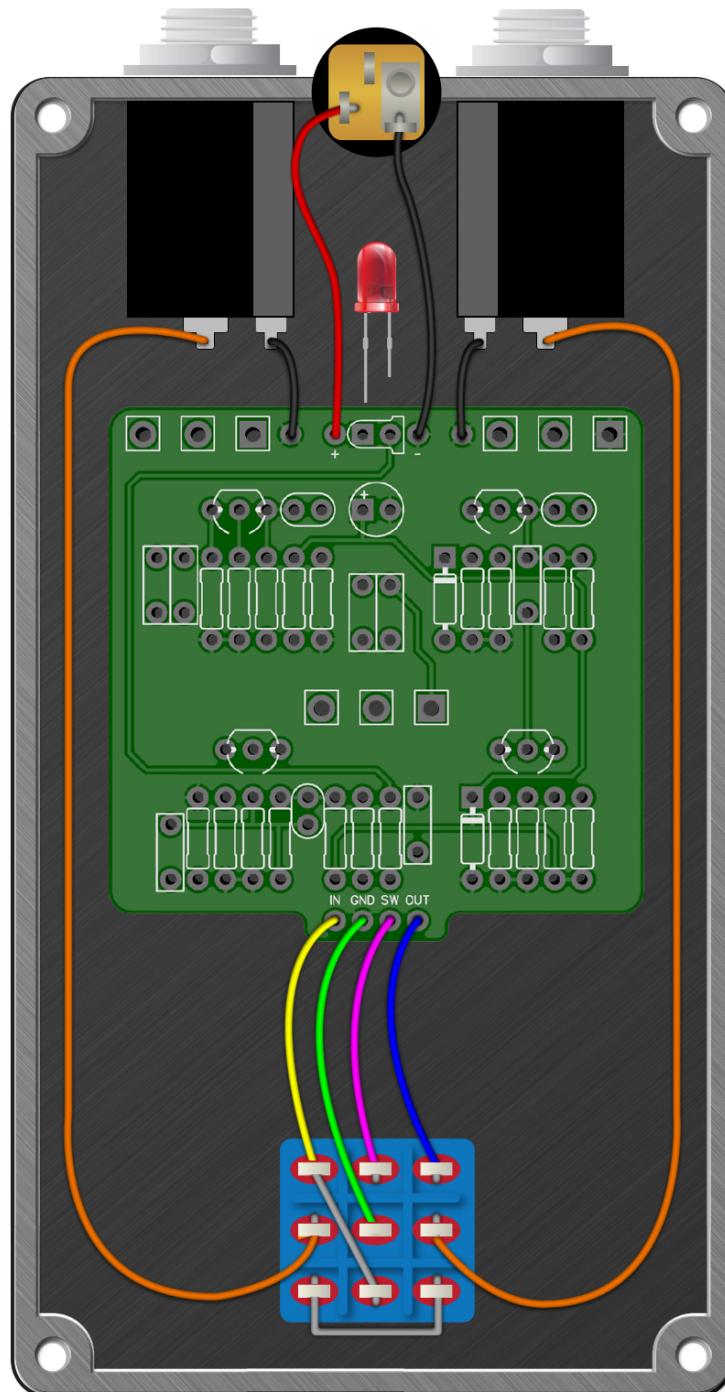

Bellum MKII Fuzz

Drill Template
125B Enclosure

