


PedalPCB

End All Red Overdrive

Revised 8/9/21

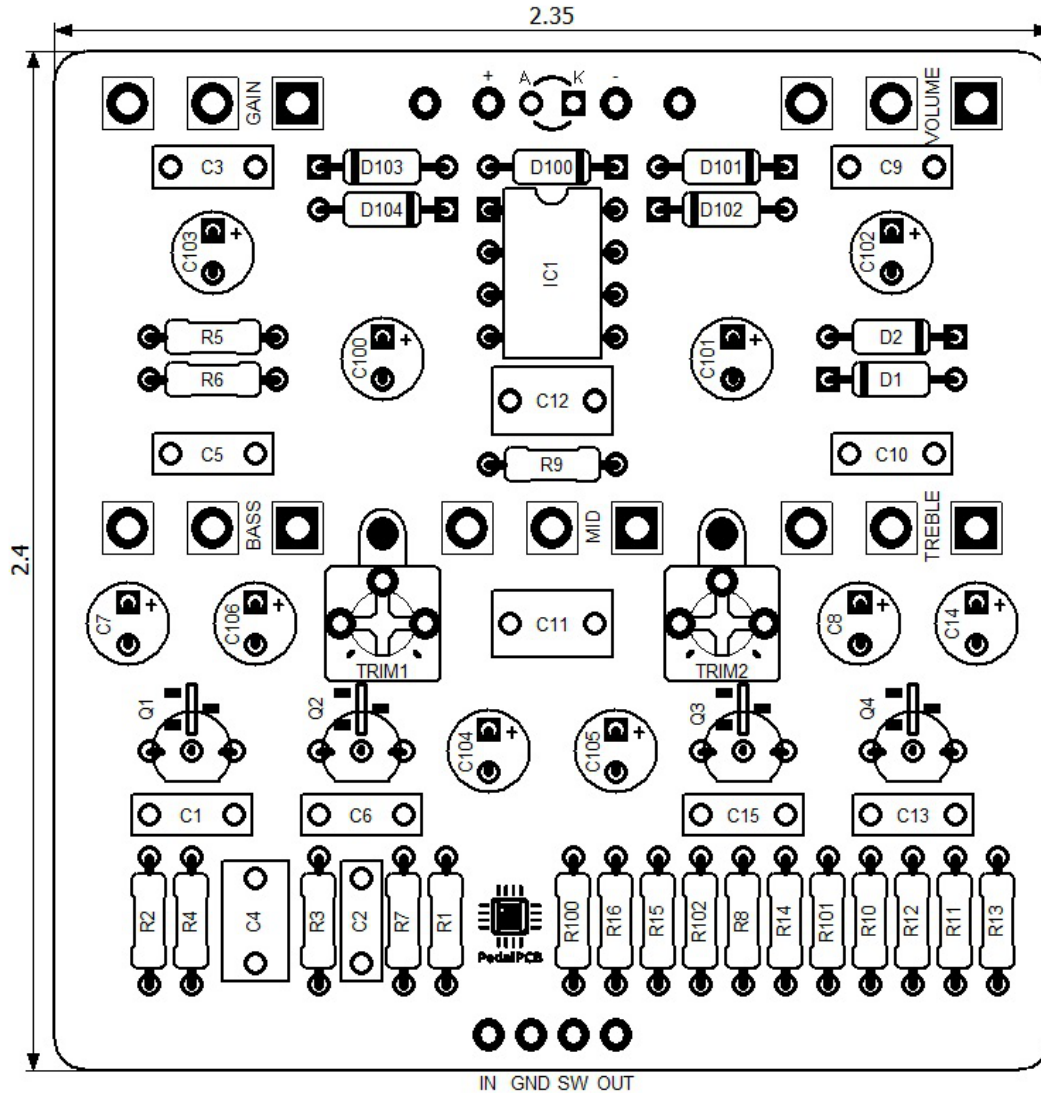

CONTROLS AND FEATURES

- Volume
- Gain
- Treble
- Mid
- Bass

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	39K	Resistor, 1/4W	
R3	1M	Resistor, 1/4W	
R4	2K2	Resistor, 1/4W	
R5	22K	Resistor, 1/4W	
R6	1K	Resistor, 1/4W	
R7	2K2	Resistor, 1/4W	
R8	4K7	Resistor, 1/4W	
R9	4K7	Resistor, 1/4W	
R10	1M	Resistor, 1/4W	
R11	1M	Resistor, 1/4W	
R12	10K	Resistor, 1/4W	
R13	1K	Resistor, 1/4W	
R14	1K	Resistor, 1/4W	
R15	2K2	Resistor, 1/4W	
R16	100K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	220R	Resistor, 1/4W	
R102	220R	Resistor, 1/4W	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C2	250p	Ceramic capacitor	
C3	22n	Film capacitor, 7.2 x 2.5mm	
C4	470n	Film capacitor, 7.2 x 5.0mm	
C5	4n7	Film capacitor, 7.2 x 2.5mm	
C6	22p	Ceramic capacitor	
C7	10u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C8	1u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C9	2n2	Film capacitor, 7.2 x 2.5mm	
C10	2n2	Film capacitor, 7.2 x 2.5mm	
C11	220n	Film capacitor, 7.2 x 5.0mm	
C12	220n	Film capacitor, 7.2 x 5.0mm	
C13	4n7	Film capacitor, 7.2 x 2.5mm	
C14	10u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C15	100n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C101	10u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C102	10u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C103	10u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C104	220u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C105	220u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
C106	220u	Electrolytic capacitor, 5mm	⚡ Minimum 25V
Q1	2N5484	JFET transistor, N-channel	
Q2	2N5484	JFET transistor, N-channel	
Q3	2N5484	JFET transistor, N-channel	
Q4	2N5484	JFET transistor, N-channel	
		Continued on next page...	



End All Red Overdrive

Parts List (Page 2 of 2)

[illegible]

