




PedalPCB

Fuzzy Foxx

Revision 12.28.19

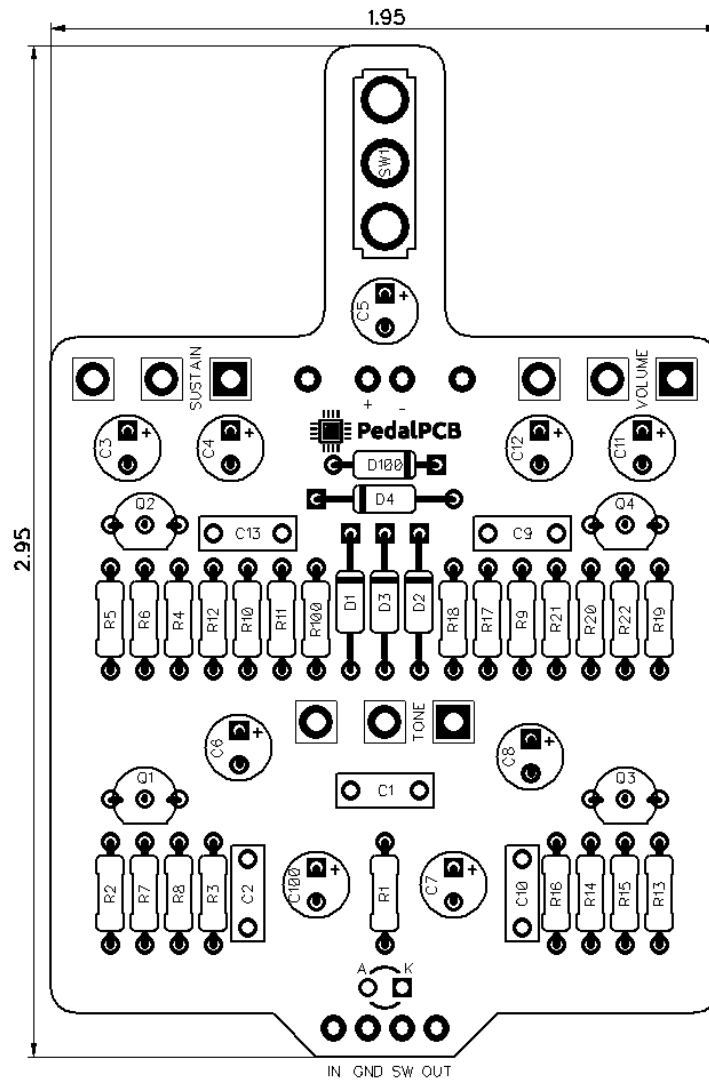

Controls

- Volume
- Tone
- Sustain
- Octave (Toggle Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 1M
R2 1K
R3 47K
R4 4K7
R5 4K7
R6 100K
R7 47K
R8 100K
R9 100K
R10 100K
R11 100K
R12 220R
R13 10K
R14 1K
R15 15K
R16 150K
R17 22K
R18 4K7
R19 10K
R20 1K5
R21 47K
R22 470K
R100 4K7

CAPACITORS

C1 100n
C2 100n
C3 10u
C4 10u
C5 10u
C6 10u
C7 10u
C8 10u
C9 3n
C10 50n
C11 10u
C12 10u
C13 1n
C100 100u

TRANSISTORS

Q1 2N5088
Q2 2N5088
Q3 2N5088
Q4 2N5088

DIODES

D1 GE
D2 GE
D3 GE
D4 GE
D100 1N5817

POTENTIOMETERS

VOLUME B50K
TONE B50K
SUSTAIN B50K

SWITCHES

SW1 SPDT On/On

Fuzzy Foxx

